

www.eco-systems.com

One of the main guide lines of Eco-Systems Watermakers S.L. has always been coping with product design with a sailor mentality, “ **A sailor who designs products to be used by other sailors**”.

emphasizing technical simplicity and maintenance.

Nowadays, more than 4.000 systems are installed in the remotest locations of the planet producing fresh water for their owners. Satisfaction guaranteed, **always working in a silent mode with the minimum possible energy consumption.**

More than 40
dealers across
the 5 continents



EcoSystems
energy recovery watermakers

ECO-SYSTEMS WATERMAKERS S.L

C/ Horta, 22. 08203 Sabadell, Barcelona (España)
Tel: +34 937 108 950
Email: info@eco-systems.com

 **Fischer Panda**
uk | POWER SOLUTIONS

Exclusive UK Distributor:
Fischer Panda UK | Power Solutions
17 Blackmoor Road, Ebblake Industrial Estate
BH31 6AX, Verwood
+44 1202 820 840 | info@fischerpanda.co.uk
www.fischerpanda.co.uk



EcoSystems
energy recovery watermakers

Source of freedom



> THE MOST RELIABLE AND
ROBUST ON THE MARKET



Splash - 25
25L/h | 24kg | 12/24
| 160w | 13A



Watermakers which have raced around the world across the 5 oceans and the most extreme areas of the planet. Now you can enjoy the freedom with the experience of a great brand.



Splash

Low energy consumption watermaker

The SPLASH range offers two models with the same dimensions, one model is 25 l/h BASIC and the other is 30 l/h E-STANDARD. These are the smallest watermakers in their category currently available on the market, equipped with hydraulic indicators (flowmeter, high and low pressure gauges). They are very easy to install with their membrane integrated into the high-pressure pump, reducing energy loss.

The E-STANDARD model is equipped with a programmable production mode that allows defining the operation times and the flush is performed automatically at the end of each cycle.


Our best seller for boats that want more freedom!

Splash - 25

Production
25 l/h

Splash - 30SE

Production
30 l/h

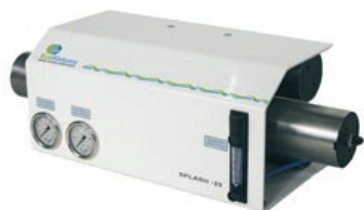

	Splash - 25	Splash - 30 SE
Weight	24 kg	25 kg
Consumption	13,3 A / 12V - 6,7 A / 24 V	14 A / 12V - 7 A / 24 V
Feed flow	350 l/h	400 l/h
Production	25 l/h (+/-10%)	30 l/h (+/-10%)
Membrane	1 x 2721 ECO	1 x 2721 ECO
Power supply	12 V DC / 24 V DC	
Characteristics	BASIC	SE/E-STANDARD
Automatic pressure regulation	x	x
Automatic regulation of the production		x
Flush	Manual	Automatic
Filtro lavado		x
Salinity control		x
Digital user's guide		x
Hour meter		x
Touch screen		x

Water-pro

Low consumption watermaker

The WATER-PRO range, using the ST-18 pump with ceramic technology, offers solutions to production requirements from 60 to 120 litres per hour.

Two configurations are available Modular or Compact, in BASIC (manual fresh flush) or E-STANDARD versions (automated fresh flush, production control, salinity control) in different voltages 12 / 24 V DC and 220 V AC.


This compact and flexible range offers advanced functions for greater comfort on-board.

SE-60

Production
60 l/h

SE-90

Production
90 l/h

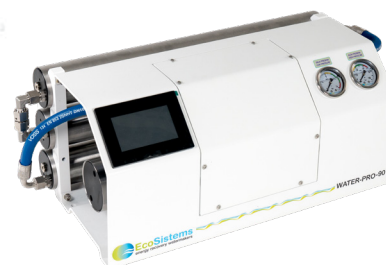

	60 l/h	90 l/h	120 l/h
Type	E-STANDARD / BASIC	E-STANDARD / BASIC	E-STANDARD
Weight	34 - 41 kg	37 - 48 kg	45 kg
Configuration	Compact/ modular	Compact/ modular	Modular
Consumption	29 A/12V - 14,6 A /24V 5 A /48 V - 1,6A /220V	45 A/12V - 22,5 A /24V 10 A/ 48 V - 2,4 A /220V	28,5 A /24V - 12 A / 48 V 2,8 A /220V
Feed flow	600	900	1000
Production	60 l/h (+/-10%)	90 l/h (+/-10%)	120 l/h (+/-10%)
Membrane Modular	2 x 2521	3 x 2521	2 x 2540
Membrane Compact	1 x 2540	2 x 2540	
Power supply	DC 12 V - 24 V - 48 V / AC 220 V - 110 V		DC 24V-48V/AC 220V-110V
Characteristics	BASIC	SE/E-STANDARD	
Automatic pressure regulation		x	x
Automatic regulation of the production			x
Flush		Manual	Automatic
Filtro lavado			x
Salinity control			x
Digital user's guide			x
Hour meter			x
Touch screen			x

Efficient

Low consumption watermaker

The Efficient range uses a rotating pump with energy recovery technology, producing from 200 up to 300 litres per hour, with a significant reduction of power consumption. This range is fully automatic; using several sensors, it self-regulates for optimal production.

The touchscreen allows the monitoring of all the necessary parameters to conduct a complete analysis of its operation. This range has two compact models 200 l/h and 300 l/h and a modular model of 240 l/h, available in 48 / 220 and 380 V.

A sophisticated range that combines technology and design.

AE - 200

Production
200 l/h

AE - 300

Production
300 l/h

SE - 200

Production
240 l/h



	AE-200	SE-200	AE-300
Configuration	Compact	Modular	Compact
Weight	82 Kg	80 Kg	89 Kg
Consumption	4,2 A / 220 V	4,25 A / 220 V	4,3 A / 220 V
Feed flow	900 l/h	1000 l/h	1200 l/h
Production	200	240	300
Membrane	3 x 2540	3 x 2540	4 x 2540
Power supply	DC 48 V / AC 220 V - 110 V - 380 V		
Characteristics	SE/E-STANDARD	AE/E-AUTOMATIC	
Autoregulated			x
Automatic pressure regulation	x		x
Automatic regulation of the production	x		x
Automatic Flush	x		x
Salinity control	x		x
Digital user's guide	x		x
Hour meter	x		x
Touch screen	x		x