


INSPIRED BY COMFORT

 **Dometic**
MARINE AIR

PRODUCT GUIDE

FOR LEISURE BOATS, WORKBOATS, AND
COMMERCIAL AND MILITARY VESSELS

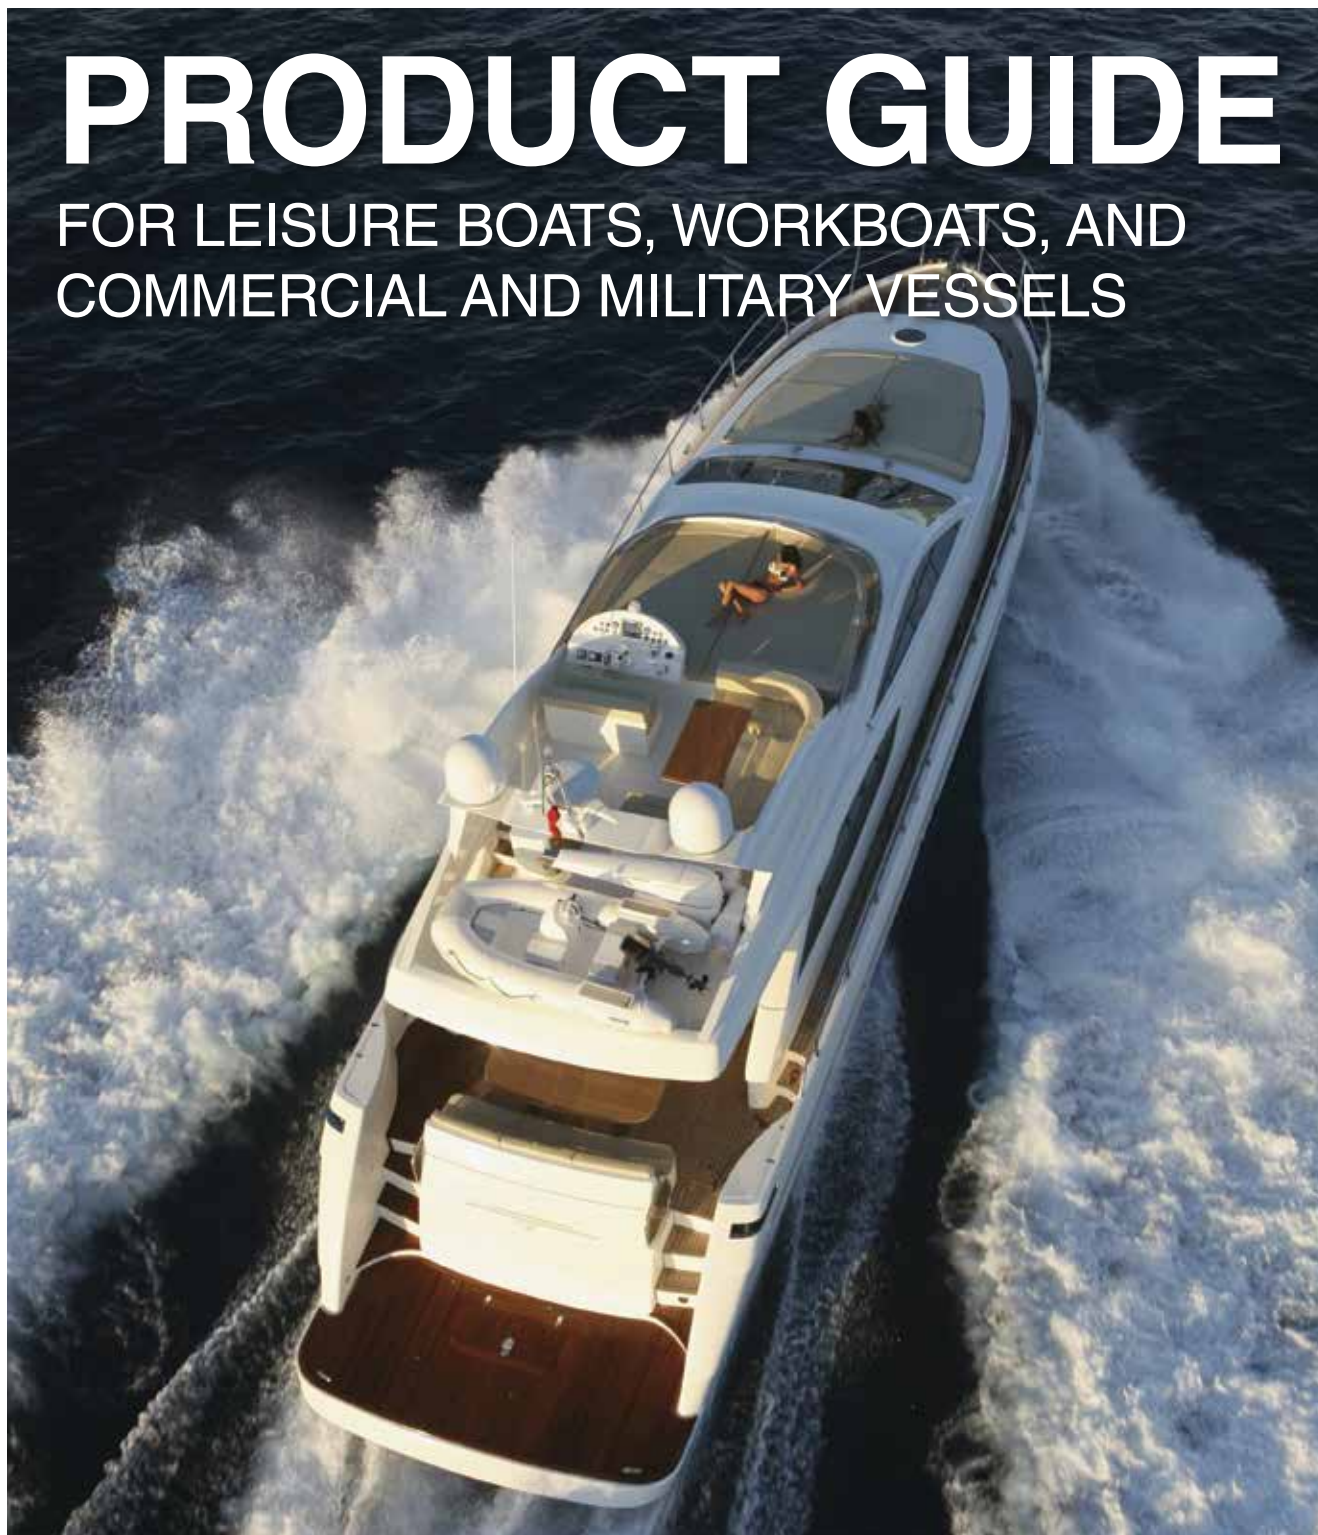

Includes Specification Sheets for:

**Direct Expansion and Chilled Water Air Conditioning, Controls, Accessories,
Eskimo Ice Systems, Air Purification, Water Purification, and Ship-Wide Ventilation Systems**

Table of Contents

LIT. ID#	REV. DATE	DESCRIPTION	PAGE
SELF-CONTAINED AIR CONDITIONING			
L-2502C	2015/03/06	Vector Turbo Series Boat Air Conditioning	7
L-3392	2014/10/03	Cuddy II Air Conditioner	9
L-2620	2015/04/10	Dash Air Low-Profile Boat Air Conditioner	11
L-2769	2015/04/10	Vector Compact Series Boat Air Conditioning	13
L-3251	2013/10/04	Vectronic Air Conditioning	15
SPLIT-GAS AIR CONDITIONING			
L-2703A	2014/10/24	Emerald Series (6K-16K) Condensers	17
L-2703B	2014/10/24	Emerald Series (24K-72K) Condensers	19
L-2696A	2012/08/03	TurboVap Series Evaporators	21
L-2696B	2012/08/03	Emerald TurboVap Series Evaporators	23
L-2125	2013/02/22	CS Series (6K-16K) Condensers	25
L-2126	2013/02/08	CS Series (24K-60K) Condensers	27
L-2855	2012/08/03	EBE Series R-410A Evaporators	29
L-2128	2012/08/03	EFD 2-Ton Evaporator	31
CHILLED WATER AIR CONDITIONING			
L-3372	2015/04/10	Variable Capacity Chiller	33
L-3263	2015/02/06	CHCG Series Compact Modular Chillers	35
L-2735	2013/04/19	MCG Low-Profile Series Modular Chillers	37
L-2734A	2014/02/28	MCG Series 24K-72K Modular Chillers	39
L-2734B	2012/11/30	MCG Series 90K-180K Modular Chillers	41
L-2136	2012/08/24	Staged Chilled Water (SCG) Air Conditioning	43
L-2467	2012/08/24	MTS High-Capacity Modular Chillers	45
L-3022	2014/10/10	Gold Series (AU-HV) Air Handlers	47
L-3261	2014/09/12	Gold Series (AU-DC) Air Handlers	49
L-2355	2014/10/10	AT-HV Series Air Handlers	51
L-2426A	2012/08/24	AT-DC Series Air Handlers	53
L-2551	2015/04/10	ATL-HV Series Low-Profile Air Handlers	55
L-2546	2015/04/10	ATL-DC Series Low-Profile Air Handlers	57
L-2552	2015/04/10	ABL-HV Series Chilled Water Air Handlers	59
L-2562	2015/04/10	ABL-DC Series Air Handlers	61
L-2567	2014/01/07	ATV-HV Series Slim-Profile Air Handlers	63
L-2564	2013/03/29	ATV-DC Series Slim-Profile Air Handlers	65
L-2404	2013/06/07	AT-HV-MU Series Fresh Air Make-Up Air Handlers	67
CABIN CONTROLS			
L-3231	2014/10/17	Smart Touch Cabin Control	69
L-2237	2014/09/26	Elite™ Display	71
L-2240	2014/09/26	Passport I/O Control & Elite™ Display Retrofit Kit	73
L-2630	2014/09/26	Compact Passport Display	75
CHILLED WATER CONTROLS			
L-3292	2014/01/17	Smart Touch Chiller Control	77
L-3495	2015/04/10	Programmable Logic Control	79
L-2133	2012/08/24	Chilled Water Master Controller	81
CONTROL SOFTWARE			
L-3373	2014/09/19	Smart Touch Integrated Intelligence Control	83
AIR CONDITIONING ACCESSORIES			
L-2701	2013/10/11	Breathe Easy™ In-Duct Air Purifiers	85
L-2712	2013/12/13	Breathe Easy™ Portable Air Purifier	87
L-2698	2013/06/21	Breathe Easy™ Microparticle Air Filters	89
L-3486	2015/04/03	SmartStart™ II Soft Starter	91
L-3000	2015/04/10	WhisperFan Controller	93
L-2263	2014/12/19	Marine Centrifugal Seawater Pumps	95
L-2129	2014/09/26	Seawater & Circulating Water Pumps	97
L-3068	2015/02/13	PHD12 Pilot-House Defroster	99
L-2413	2013/09/20	Variable Frequency Drives (Standard)	101
L-2541	2012/08/24	Pump Packages for Chilled Water Systems	103
L-2130	2015/04/10	Air Distribution Components	105
DOMETIC MARINE AIR CONDITIONING			
L-3003	2014/01/17	Dometic EnviroComfort Retrofit Kits (R-410A)	107
AIR-COOLED AIR CONDITIONING			
L-3010	2015/01/09	DuraSea Rooftop Air-Cooled Air Conditioner	109
L-2544	2013/02/22	DuraSea Series Air-Cooled Condensers	111
L-2132	2013/09/27	Radome Environmental Control Units	113
THERMOELECTRIC COOLING			
L-3374	2015/04/10	Eskimo Cup	115
ESKIMO ICE FISHBOX ICE SYSTEMS			
L-3076	2014/10/10	Eskimo Ice EI540D Fishbox Ice System	117
L-3118	2015/04/10	Eskimo Ice EI1000D Fishbox Ice System	119

LIT. ID#	REV. DATE	DESCRIPTION	PAGE
ICE MAKERS			
L-3209	2014/08/15	HZB Series Portable Ice Makers	121
FRESHWATER RO SYSTEMS			
L-3458	2015/03/06	Dometic Spot Zero ZTC Water Purifier Systems	123
L-3206	2015/04/10	Dometic Spot Zero Water Purifier Systems	125
L-3387	2015/04/10	Dometic Spot Zero Double Pass System	127
SEAWATER RO SYSTEMS			
L-3386	2015/03/13	Dometic Sea Xchange XTC Watermakers	129
L-3294	2015/03/06	Dometic Sea Xchange SX Watermakers	131
L-3385	2015/03/06	Dometic Sea Xchange SE Watermakers	133
SHIP-WIDE VENTILATION			
L-3283	2015/02/13	Ship-Wide Ventilation Systems	135

Understanding Air Conditioning

The basic principle of any air conditioner is the transfer of heat from one element to another. In a seawater-cooled air conditioner, heat is transferred from the cabin air to the refrigerant gas to the seawater. In heating mode, the refrigerant flow is reversed and heat is transferred from the seawater to the refrigerant gas to the cabin air.

In addition to lowering the air temperature, moisture (humidity) is also removed. Drier air feels more comfortable, helps keep the boat dry, and reduces mold growth and other moisture-related problems.

The Effects of Seawater Temperature

The efficiency of the system is dependent on both the seawater and cabin temperatures. In cooling, the air conditioner works best when the seawater temperature is below 90°F (32°C). At higher water temperatures the unit will operate, but at reduced capacity. As the water temperature rises, so does the refrigerant gas pressure. A high-pressure safety switch will shut the unit down if the water temperature gets too hot, or there is a loss of cooling water flow.

In heat mode, the opposite is true. As the seawater temperature gets colder, there is less heat available and heating performance drops. Full heating capacity is available in water temperatures as low as 55°F (13°C), but drops to about 50% capacity in 40°F (4.4°C) water. Below this, the refrigerant pressure can be so low that the unit will not produce heat, (or may shut down on low-pressure fault, if this option is installed).

The Three Types of Marine A/C Systems

Self-Contained DX Systems (see Figure 1)

- All major components are mounted on a single chassis installed in the living area — usually under a bunk or settee or in a locker.
- A single unit can cool one cabin or it can be ducted to two or more cabins to save space and cost.
- Best choice for boats under 40 ft. (12 m) due to lower cost of units and available installation space.

Split-Gas DX Systems (see Figure 2)

- Major components are split between two units that are installed in different locations and connected by insulated, copper refrigerant tubing.
- Condensing unit (compressor, seawater condenser, and electrical components) mounts in engine room or other mechanical space.
- Evaporator unit installs in living area(s). Two evaporators can connect to one condensing unit to cool multiple cabins or a single large area.
- Evaporators require less space in the living area and are quieter because they do not have a compressor.
- Ideal for boats up to 80 ft. (24 m). Maximum length of refrigerant tubing between the condenser and air handlers is 50 ft. (15 m) and system must be charged with refrigerant by a certified technician.

Chilled Water Systems (see Figure 3)

- Chiller unit in the engine room cools (or heats) fresh water that is pumped through an insulated piping loop to air handlers located in the living spaces that cool (or heat) the air.
- Chillers offer flexible load management and a reduced peak electrical load.
- Best for boats over 80 ft. (24 m). There is no limitation on the number of air handlers in a system, or on the distance from the chiller to the air handlers.

Figure 1: Self-Contained Air Conditioning

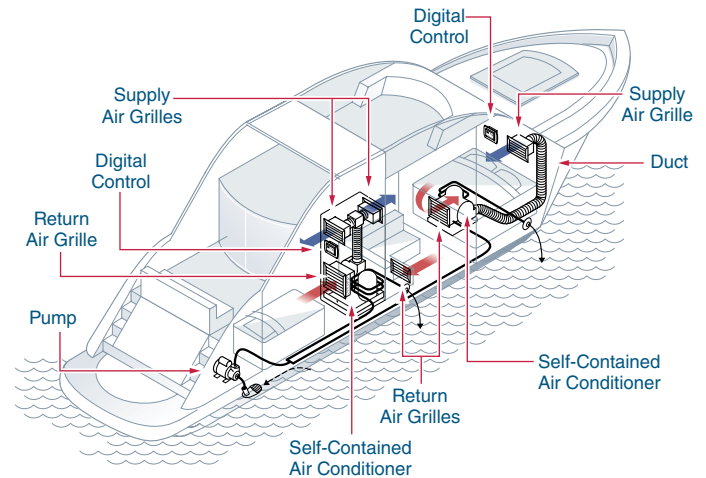


Figure 2: Split-Gas Air Conditioning


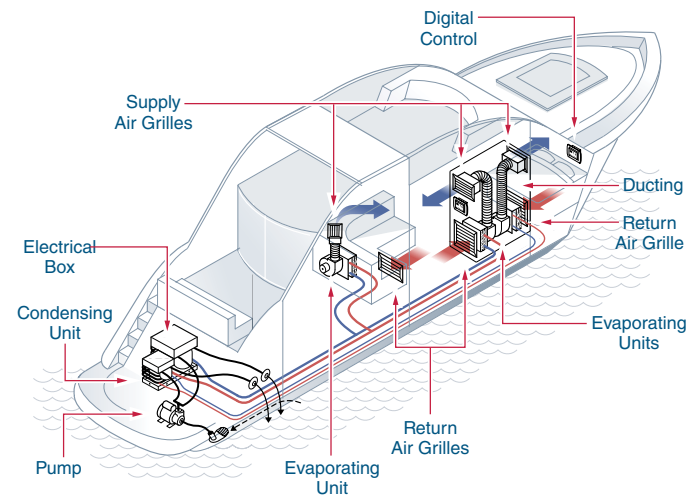


Figure 3: Chilled Water Air Conditioning

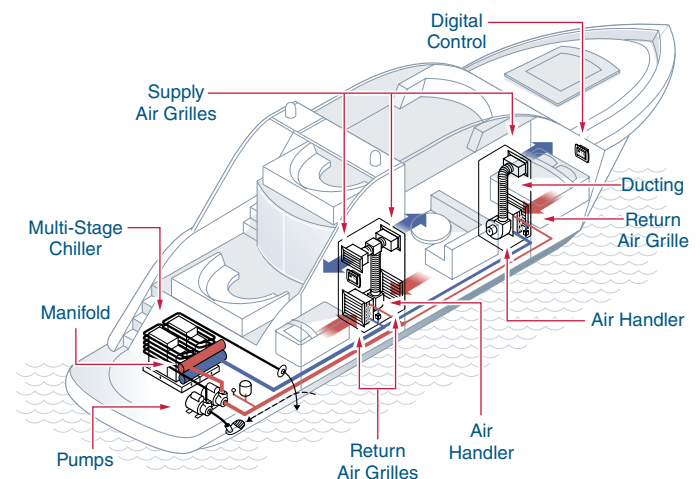

Factors That Determine the Type of Air Conditioning System You Need

- 1. Size and layout of the boat for calculating required system capacity.
- 2. Access for routing tubes/wires/hoses.
- 3. Location of furnishings.
- 4. Storage space to sacrifice.
- 5. Cost.

How to Size Your A/C System

Step 1: Find the required capacity by dividing the vessel into three main load areas:

- **Below Deck:** Cabins where the hull slopes inward toward the keel with minimal port lights and hatches.
- **Mid Deck:** Areas on main deck with small or shaded windows.
- **Above Deck:** Areas with large glass surfaces and direct sunlight.

Multiply the length and width of each cabin to be treated to determine the area in square feet or square meters. It is assumed the boat has an average headroom of about 6.5 ft. (2 m) with an average amount of furniture. If one end of the cabin is narrower than the other, take your measurement in the middle.

Using Table 1, multiply the area of each cabin by the appropriate load factor to find the required air conditioner capacity. For example, if your boat is in a temperate climate and you are measuring in square feet, you would multiply your total below-deck area by 60, your mid-deck area by 90, and your above-deck area by 120. (A temperate climate generally has 95°F (35°C) air and 85°F (35°C) water with moderate humidity; a tropical climate averages 105°F (41°C) air and 95°F (35°C) water with high humidity.)

Table 1: Load Factors (BTU/hr per ft²)

Climate	Below-Deck Load Factors	Mid-Deck Load Factors	Above-Deck Load Factors
Temperate	60	90	120
Tropical	80	120	150

Step 2: Taking into account the boat’s size and layout, determine the number of self-contained systems or air handlers needed.

Find out which cabins or areas will benefit best from a dedicated thermostat control, and which cabins can be served by ducting or a secondary air handler (where the only temperature control is an adjustable grille or fan-speed control).

Step 3: Taking into account the boat’s size and layout, determine the location of each self-contained system or air handler.

In addition to leaving enough room for plumbing and ducting, there must also be sufficient space in each installation location for servicing and/or removal of the unit.

A self-contained unit or air handler must have an open return-air path. However, the return-air grille does not need to be directly in front of the unit. In fact, the system will be less noisy if there is an indirect path for the return air to follow. **Never install the unit in the bilge or engine room or where vapors from these areas could reach the unit.**

A self-contained unit or air handler must be located so the discharge ducting can be routed to a high point in the cabin. Rotate the blower to create the most direct path for routing the discharge duct. Poor airflow may result from a ducting run of over 15 ft. (4.5 m) or a ducting run with many bends. Plan for the shortest possible ducting run while limiting the number of bends.

Step 4: Seawater Components. Use one pump of adequate capacity for all air conditioning systems on board. The basic rule is 180 gallons (681.4 liters) per hour (3 GPM/11.4 LPM) of water per ton of air conditioning (one ton = 12,000 BTU/hr). If more than one system shares a common pump, you will also need a pump relay and manifold.

The BTU/hr capacity in Table 2 shows recommended seawater flow rates and minimum inlet (through-hull) sizes.

Table 2: Pump Sizing Chart by BTU/hr Capacity

System Capacity (BTU/hr)	Seawater Flow Rate ⁽³⁾ (GPH/LPH)	Through-Hull Inlet Size (in/mm)
5,000 - 12,000	180/681	0.50/13
16,000 - 24,000	360/1363	0.75/19
30,000 - 48,000	720/2726	1.00/25

⁽³⁾ Allow for a reduction in capacity of 17% if using a 60Hz pump at 50Hz.

Step 5: Determine the proper duct diameter (Ø) and grille sizes for your air conditioning system. Use Table 3 to find the correct sizes, which are based on the system’s BTU/hr capacity.

Table 3: Duct and Grille Sizing Chart by BTU/hr Capacity

Air Handler (BTU/hr)	Duct Ø (in/mm)	Return-Air Grille (ft²/cm²)	Supply-Air Grille (ft²/cm²)
4,000	4/102	64/413	32/206
6,000	4/102	64/413	32/206
9,000	6/152	98/632	49/316
10,000	6/152	100/645	60/387
12,000	6/152	130/839	70/452
16,000	7/178	160/1,032	80/516
18,000	7/178	200/1,290	100/645
24,000	9/229	240/1,548	140/903
30,000	10/254	350/2,258	170/1,097
36,000	10/254	360/2,323	196/1,265

Other A/C System Components

A complete air conditioning system requires controls, a seawater cooling system, an air-distribution system and electrical connections.

Controls


There are two types of controls: digital and electro-mechanical switch.

- **Digital:** These keypad/displays are part of a microprocessor system with many advanced functions, including automatic fan-speed control, fault display, and a dehumidification program. Decorative bezels can be added to complement the vessel’s interior decor.
- **Mechanical:** These manual switches with two or three rotary knobs control the mode of operation, thermostat, and variable fan speed. Reverse-cycle models have automatic changeover between heating and cooling.

Seawater Cooling System

The seawater cooling system brings seawater into and through the system then discharges it overboard. It consists of an inlet through-hull fitting, seacock (water valve), strainer, pump, and overboard discharge fitting, all connected by hose or piping (see Figure 4).

Figure 4: Correct Plumbing of a Seawater-Cooling System

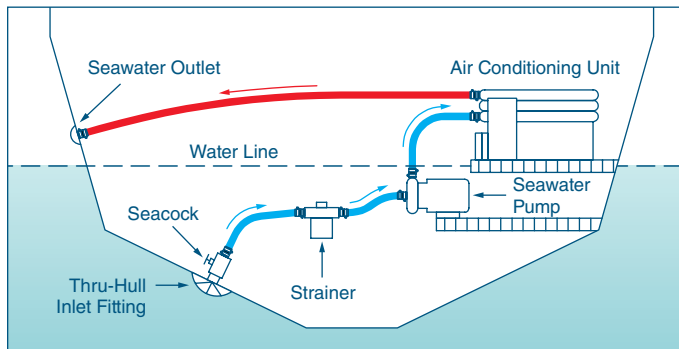

If multiple air conditioning units are served by a single seawater pump, then a pump relay and water manifold are required. A centrifugal seawater pump is recommended for efficient, quiet operation and long life. Centrifugal pumps are not self-priming and must be mounted below the water-line (install a self-priming pump for shallow-draft boats).

It is important that the seawater plumbing be self-draining, meaning that if the boat is lifted, all water in the piping will drain out. An air conditioning system plumbed this way will have no air locks which could disrupt the flow of seawater.

Air-Distribution System

In cooling mode, warm cabin air is drawn into the self-contained unit or air handler through a return-air grille. It is then cooled and blown through flexible insulated duct and back into the cabin through a supply-air grille installed high in the cabin. The supply-air grille should be installed away from the return-air grille to ensure good circulation.

Plenums, or transition boxes, can be installed in the duct to split the air flow into multiple ducts to serve one or more cabins.

Figure 5: Installation of a Self-Contained System Under a Bunk


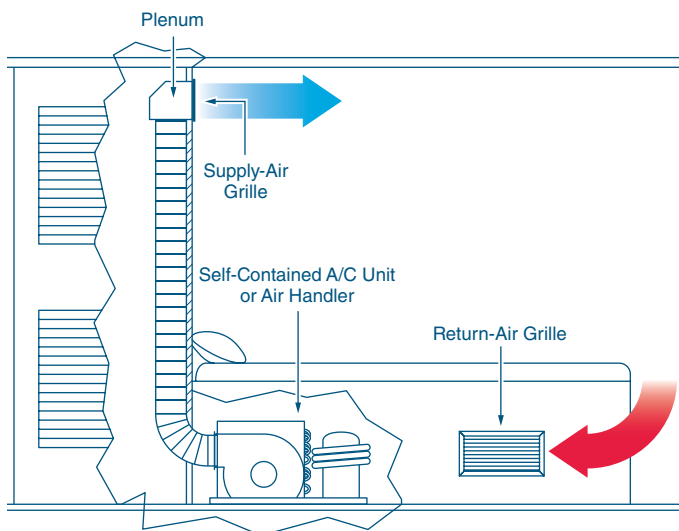


Figure 6: Installation of An Air Handler In a Closet

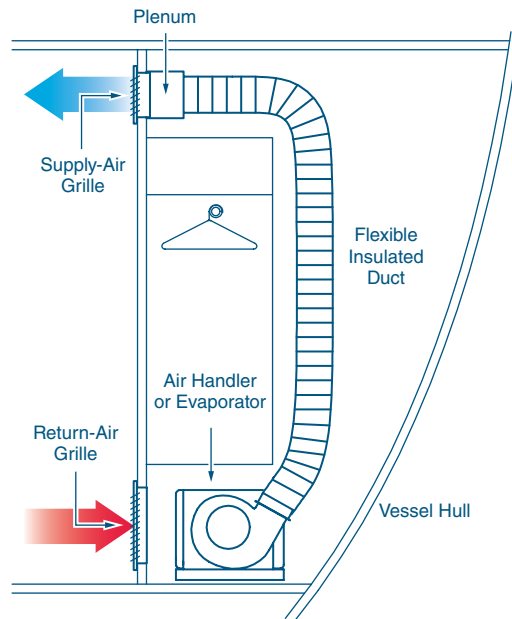

Electrical Connections

Marine Air air conditioning systems are available for use with common power supplies throughout the world. In the United States and most of North and South America, the systems are 115 or 230VAC, 60Hz, single phase. In Europe and most of Asia, systems are typically 230VAC, 50Hz, single phase.

Running and starting loads of an A/C system are often the largest electrical loads on a boat. It is important that the power supply system is large enough to handle these loads, and is installed properly. Always follow local codes or ABYC codes for proper wiring guidelines. Contact a Marine Air dealer if you have any special power requirements.

The voltage rating of an air conditioner is a nominal rating. The actual voltage in a given location may be higher or lower by as much as 10% and the system will run fine. Table 4 below shows nominal compressor ratings and the acceptable range of available power.

Table 4: Compressor Electrical Specs

Nominal Rating	Acceptable Range
230V/60Hz/1-ph.	208-240V/60Hz/1-ph.
220V/50Hz/1-ph.	220-240V/50Hz/1-ph.
230V/60Hz/3-ph.	208-230V/60Hz/3-ph. and 190-220V/50Hz/3-ph.
220V/50Hz/3-ph.	200-220V/50Hz/3-ph.
460V/60Hz/3-ph.	440-480V/60Hz/3-ph. and 380-420V/50Hz/3-ph.
380V/50Hz/3-ph.	380-420V/50Hz/3-ph.

Using a Generator

If running your boat's electrical systems on a generator, make sure the generator can handle the large starting inrush current of the air conditioning compressor. Use of a Dometic SmartStart™ Soft Starter is highly recommended to smooth out the compressor startup power demand and ease strain on the generator.

Take the product specification sheets to your generator supplier and ask for their help.

Vector Turbo Series Boat Air Conditioning

Powerful, Quiet & Compact With No Drain Pan Worries



Turbo 14,000 BTU/h unit shown with optional sound cover

The Vector Turbo series completely revolutionized self-contained boat air conditioning (cooling and heating) with patented innovations in marine air conditioning system design, winning the IBEX Innovation Award in 2007.

The rust-free molded composite drain pan has three drains for the rapid removal of condensate water. The drain pan has a small footprint for installation flexibility.

A vibration-isolation mounting system results in significantly quieter, virtually vibration-free performance. The enclosed blower motor eliminates overhang for reduced depth.

The Turbo series was specifically engineered to harness and maximize the impressive performance of R-410A, a proven and environmentally safe refrigerant gas.

The optional Turbo sound cover provides up to 50% further noise reduction. This compact, easy-to-install sound cover completely encases the compressor to provide a 3- to 5-dB reduction in noise. Available for all Turbo models, the sound cover installs in minutes. Mounting hardware is included.



Redesigned composite drain pan is stronger with beefed-up drain threads to resist cracking.



Optional sound cover further reduces compressor noise by up to 50%.



Vibration-isolation mounting clips reduce vibration and noise.

Key Benefits

- Up to 27% more energy efficient
- Up to 21% increased capacity
- Compact design uses less space
- Rust-free composite drain pan
- Up to 85% less standing water in the drain pan
- Vibration-isolation mounts reduce noise and vibration
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- Designed from the inside out with multiple patented innovations
- Redesigned composite drain pan is stronger with beefed-up drain threads to resist cracking.

Special Options

- Optional sound cover further reduces compressor noise up to 50%

Product Testimonial

"There is very little noise coming from the compressor, and vibrations are practically non-existent. I highly recommend this unit."


— Bob Silverman, boat owner

Specifications for Vector Turbo Series Boat Air Conditioning

Model ⁽¹⁾	VTD6	VTD8			VTD10			VTD12			VTD16		
Capacity (BTU/h) ⁽²⁾	6000	8000			10000			12000			16000		
Voltage (V)	115	230	240	115	230	240	115	230	240	115	230	240	115
Cycle (Hz) ⁽³⁾ / Phase (Ph)	60/1	50/1	50/1	60/1	50/1	50/1	60/1	50/1	50/1	60/1	50/1	50/1	60/1
Full Load Amps (FLA) Cool (A)	4.6	2.2	2.7	5.5	3.1	3.2	6.7	3.3	3.2	8.7	4	3.3	10.4
Full Load Amps (FLA) Heat (A)	5.9	2.8	3.7	7.1	4	4.1	8.8	3.9	4.3	10.9	5.1	4.3	13.6
Full Load Amps (FLA) Blower (A)	0.8	0.36	0.36	1.31	0.7	0.83	1.14	0.61	0.48	1.14	0.61	0.48	1.61
Locked Rotor Amps (LRA) (A)	36	17.7	17.7	36	17.7	17.7	42	22	21	58	28	21	62
Max. Circuit Breaker (A)	15	10	10	20	10	10	25	15	10	30	15	10	40
Min. Circuit Ampacity (A)	12	7	6	13	7	7	16	10	8	20	11	8	25
Refrigerant Type	410A	410A			410A			410A			410A		
Min. Height (in/mm) ⁽⁴⁾	10.8/275	10.8/275			12.2/310			12.2/310			12.9/328		
Max. Height (in/mm) ⁽⁴⁾	11.1/282	11.1/282			13/331			12.5/318			13.4/341		
Height w/Opt. Sound Cover (in/mm) ⁽⁴⁾	13.4/341	13.4/341			14/356			14/356			14/356		
Width (in/mm) ⁽⁴⁾	17.6/448	17.6/448			20.4/519			20.4/519			21.4/544		
Max. Depth (in/mm) ⁽⁴⁾	10.7/272	10.7/272			12.4/315			12.4/315			13.3/338		
Min. Supply Duct Size (in/mm)	4/102	5/127			6/153			6/153			7/178		
Min. Supply Air Grille Size (sq in/sq cm)	32/207	48/310			60/388			70/452			80/517		
Min. Return Air Grille Size (sq in/sq cm)	64/413	80/517			100/646			130/839			160/1033		
Seawater Inlet Connection (in/mm)	5/16	5/16			5/16			5/16			5/16		
Net Weight (lbs/kg) ⁽⁵⁾	42.5/19.3	33/15	42.5/19.3	45.5/20.7	36/16.4	47.7/21.7	50.5/23	45/20.5	46/20.9	52/23.6	47/21.4	52/23.6	60/27.3
Gross Weight (lbs/kg) ⁽⁵⁾	50.25/22.8	41/18.6	50.75/23.1	53.75/24.4	44/20	57.5/26.1	59.5/27	53/24.1	54/24.5	61/27.7	55/25	61/27.7	69.5/31.6
Height-Electrical Box (in/mm)	8.8/224	8.8/224			8.8/224			8.8/224			8.8/224		
Width-Electrical Box (in/mm)	6.5/166	6.5/166			6.5/166			6.5/166			6.5/166		
Depth-Electrical Box (in/mm)	2.7/69	2.7/69			2.7/69			2.7/69			2.7/69		

¹ Add a "Z" for 230V/60Hz units or "Z50" for 240V/50Hz units. For example: VTD8K=115V/60Hz; VTD8KZ=230V/60Hz; VTD8KZ50=240V/50Hz
² BTU and electrical data are based on 45°F/7.2°C evaporator and 100°F/37.8°C condenser in cool mode, and a 45°F/7.2°C evaporator and 130°F/54.4°C condenser in heat mode.
³ 60Hz units must not operate at 50Hz and 50Hz units must not operate at 60Hz unless data plate states otherwise.
⁴ All dimensions ± 0.30 in. (8 mm).
⁵ All weights ± 10%.

Dimensions

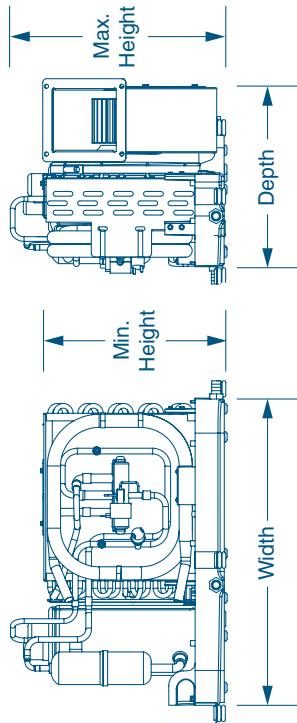

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
 After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
 For all other areas visit our website to find your nearest distributor.

L-2502C Rev. 20150306

Specifications and availability subject to change without notice.



Dealer

Cuddy II Air Conditioner

DC-Powered Air Conditioning With Progressive Low Starting Surge



Designed for small cabins, Dometic's Cuddy II 12V DC-powered air conditioner is a self-contained, water-cooled unit for boats cruising in either freshwater or saltwater. The unit draws power gently at startup for a progressive low starting surge.

The Cuddy II is ideal for sailboats and powerboats, and can be operated directly from batteries or used dockside with a suitable battery charger. It provides 3,500 BTUs of cooling capacity and draws only 30 amps (without circulating pump).

Built for dependability, the Cuddy II has a stainless steel base pan that is insulated to prevent sweating and minimize movement and sound. The evaporator coil of lanced aluminum fins and rifled copper tubing is dipped in a protective polyester enamel. The compact motorized impeller moves air quietly and efficiently through ductwork and grille.

Protective features include independent locked-rotor protection on compressor and air mover. Under voltage protection shuts down compressor and air mover if voltage is less than 10.5V. The compressor and air mover have separate over-current protection, with a 45-amp limit on the compressor and a 27-amp limit on the air mover. The Cuddy II has thermal protection and polarity protection.

Installation is easy with a readily accessible terminal strip for both the 12V DC power input and the thermostat wiring. There are condensate connections on 3 sides of the base pan, and hold-down clamps are included. The Cuddy II uses environmentally friendly R-134a refrigerant, and comes factory charged, wired, and tested. To conserve space, the control box is mounted remotely from the air conditioner on a 4.5 ft (137 cm) heavy-duty cable.

Key Benefits

- Ideal for small cabins, sailboats, and powerboats
- 12V DC-powered air conditioning system
- Provides 3,500 BTUs of cooling power
- Under voltage protection at 10.5V
- Dependable and easy to install
- Stainless-steel insulated base pan
- High-performance evaporator coil
- Locked-rotor protection
- Over/under voltage protection
- Thermal protection
- Polarity protection
- Factory charged, wired, and tested

Special Options


- Wall-mounted thermostat
- O-LED joystick digital control thermostat
- DC water pump
- Plumbing fittings
- Grilles, transitions, and other duct materials

Specifications for Cuddy II Air Conditioner

Model	Cuddy II
Capacity ⁽¹⁾	3,500 BTU/hr
Voltage	12V DC
Min. Voltage	10.5V DC
Full Load Amps (FLA) Cool	29.2
Full Load Amps (FLA) Blower	2.7
DC Power Requirement (W)	500
Max. Circuit Breaker (Amps)	50
Min. Circuit Ampacity (Amps)	42
Refrigerant Type	R-134A
Height (in/mm)	10.63/270
Width (in/mm)	9.63/245
Depth (in/mm)	25/635
Min. Duct Diameter (in/mm)	4/102
Min. Supply-Air Grille (sq. in/cm)	12/30
Min. Return-Air Grille (sq. in/cm)	64/163
Water Connections (in/mm)	0.63/16
Net Weight (lbs/kg)	35/15.9
Gross Weight (lbs/kg)	45/20.4

¹ BTU and electrical data are based on a 45°F (7.2°C) evaporator and 100°F (37.8°C) condenser in cool mode.

Dimensions

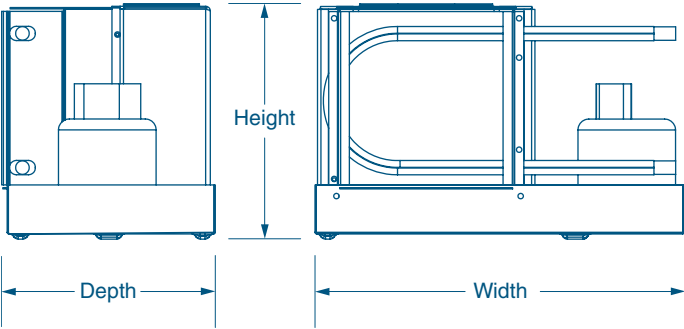

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3392 Rev. 20141003 Specifications and availability subject to change without notice.

Dealer



Dash Air Low-Profile Boat Air Conditioner

Designed for Unique & Height-Restrictive Installations



The Dash Air low-profile self-contained boat air conditioner is designed for unique applications. Thanks to the innovative horizontal compressor and dual high-velocity tangential blowers, it can be installed in height-restrictive spaces, making it ideal for flybridge, cockpit, engine room, or exterior deck installations.

The Dash Air delivers 16,000 BTU/hr of cooling and heating in a package that stands just eight inches (203 mm) high. The dual blowers can be ducted to different areas or to confined areas such as flybridge dashboards and consoles.

Dash Air features an oversized four-row evaporator coil for excellent heat removal under low fan-speed conditions. A highly efficient blower reduces power consumption, and the blower flows to two outlets.

Dash Air is available as a low-profile evaporator only (EDLE units) to work with Marine Air R-410A remote condensers.



Thanks to the unique horizontal compressor, these low-profile units stand only 8 in. (203 mm) high.

Key Benefits


- Stands only 8 in. (203 mm) high
- Unique horizontal compressor
- 16,000 BTU/hr cooling and heating
- High-efficiency, ductable dual tangential blowers
- Ideal for flybridge, cockpit, and on-deck installations
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- 304-grade stainless-steel drain pan for long service life
- Stainless-steel condensate drains for excellent water removal
- Electrical box can be remotely mounted up to 5 ft. (1.52 m)
- Special corrosion-resistant coating on blower and housing
- Oversize four-row evaporator coil for excellent heat removal under low-fan speed conditions
- Available as low-profile evaporator only (EDLE units) to work with Marine Air remote condensers

Specifications for Dash Air Low-Profile Boat Air Conditioner

Model ⁽¹⁾	VLD16			EDLE16	
Capacity (BTU/h) ⁽²⁾	16000			16000	
Voltage (V)	115	230	240	115	230
Cycle 1 (Hz)	60		50	60	
Cycle 2 (Hz)	N/A			50	
Phase (Ph)	1			1	
Full Load Amps (FLA) Cool (A)	12.8	4.7	4.42	1.5	0.62
Full Load Amps (FLA) Heat (A)	15.5	6.2	5.82	N/A	
Full Load Amps (FLA) Blower (A)	2	0.86	0.62	2	0.86
Locked Rotor Amps (LRA) (A)	63	29	26	N/A	
Max. Circuit Breaker (A)	40	20	15	5	
Min. Circuit Ampacity (A)	24	14	11	2	1
Refrigerant Type	R410A	410A		N/A	
Height (in/mm) ⁽³⁾	8/204			7.4/188	
Width (in/mm) ⁽³⁾	30.25/769			22.25/566	
Depth (in/mm) ⁽³⁾	14/356			11/280	
Min. Supply Duct Size (in/mm)	7/178			7/178	
Quantity-Duct Connections	2			2	
Min. Supply Air Grille Size (sq in/sq cm)	80/517			80/517	
Min. Return Air Grille Size (sq in/sq cm)	160/1033		106/684	160/1033	
Seawater Inlet Connection (in/mm)	5/8 /16			N/A	
Net Weight (lbs/kg) ⁽⁴⁾	70/31.8	65/29.5	72.25/32.8	19/8.7	
Gross Weight (lbs/kg) ⁽⁵⁾	80/36.3	76/34.5	81.75/37.1	29/13.2	

¹ VLD indicates low-profile self-contained units. EDLE indicates low-profile evaporator-only units.
² BTU and electrical data are based on a 45°F/7.2°C evaporator and 100°F/37.8°C condenser in cool mode, and a 45°F/7.2°C evaporator and 130°F/54.4°C condenser in heat mode.
³ All dimensions ± 0.30 in. (8 mm).
⁴ All dimensions ± 10 mm
⁵ All weights ± 10%

Dimensions

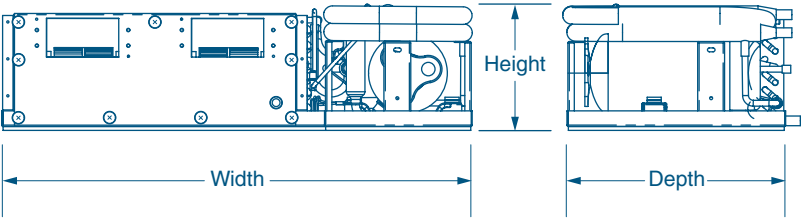

Air Distribution Accessories for Dash Air

- #229000005 – PLNM AMN RA VLD16/2@5 in. Side Discharge Plenum
- #229000006 – PLNM AMN RA VLD16/2@5 in. Upward Discharge Plenum
- #229000007 – PLNM AMN RA VLD16/2@5 in. Downward Discharge Plenum
- #228700089 – Ring ABS trans 5 in. – OB Short Flange

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2620 Rev. 20150410 Specifications and availability subject to change without notice.

Dealer



Vector Compact Series Boat Air Conditioning

High-Capacity Air Conditioning In a Compact Package



The 27,000 BTU/hr Compact unit with painted galvanized metal chassis

The Vector Compact series of self-contained marine air conditioners offers 18,000 and 27,000, and 30,000 BTU/hr of reverse-cycle cooling and heating.

These high-capacity units were engineered to harness and maximize the impressive performance of environmentally safe R-410A refrigerant. Used in the HVAC industry for more than 10 years, R-410A is proven and reliable, complies with all EPA standards, and is accepted worldwide.

All models offer direct expansion operation in a compact, low-profile unit, with a seawater-cooled condenser and choice of controls. Vector Compact units are designed for installation under a settee or berth, in a locker or cabinet, or other convenient location.

Vector Compact systems feature high-velocity (HV) blowers. All blowers are insulated to prevent secondary condensation, and are fully rotatable for flexibility during installation. A painted galvanized metal chassis is standard on 18K and 27K models; a stainless-steel chassis upgrade is available for enhanced durability.

The SVCD30 features dual evaporator coils and a single compressor on a compact stainless-steel chassis. The dual high-velocity (HV) blowers can be ducted to two or more interior spaces.



The dual-blower 30,000 BTU/hr unit with stainless-steel chassis.

Key Benefits

- Compact design reduces unit size by up to 25% of the original Vector Rotary's size
- High-velocity (HV) fully-insulated blowers are rotatable
- Blowers are rotatable and fully insulated
- Patented design increases cooling capacity and dehumidification
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- Unique compressor and reversing valve mounting reduces vibration
- Electrical box is installed within unit footprint on 18K and 27K models; remotely mounted for 30K models
- High-efficiency rotary and scroll compressors are quiet and more reliable
- Condenser coil's cupronickel-encased copper condenser coil provides maximum heat transfer and high resistance to corrosion
- Evaporator coil employs an enhanced fin design and rifled copper tubing to provide maximum capacity
- 27K and 30K models available in 3-phase power on a special order basis


Specifications for Vector Compact Series Boat Air Conditioning

Model ⁽¹⁾	VCD18			VCD27		SVCD30	
Capacity (BTU/h) ⁽²⁾	18000			27000		30000	
Voltage (V)	115	230	220	230	220	230	380
Cycle (Hz) ⁽³⁾ /Phase (Ph)	60/1		50/1	60/1	50/1	60/1	50/3
Full Load Amps (FLA) Cool (A)	11.1	6.4	5.7	8	7.6	9.7	4.96
Full Load Amps (FLA) Heat (A)	15.1	8.3	7	11.2	11	12.8	5.96
Full Load Amps (FLA) Blower (A)	1.93	1.15		1.64		1.76	1.56
Locked Rotor Amps (LRA) (A)	66	32	26	58.3	60	53	38
Max. Circuit Breaker (A)	45	20		45	40	35	15
Min. Circuit Ampacity (A)	27	13		27	24	21	10
Refrigerant Type	410A			410A		410A	
Height-Coil (in/mm) ⁽²⁾	14/356			18/458		N/A	N/A
Height-Blower (in/mm) ⁽²⁾	15.5/394			19.25/489		N/A	N/A
Height-Compressor (in/mm) ⁽²⁾	N/A			N/A		16/407	
Width (in/mm) ⁽²⁾	21/534			24.75/629		25/635	
Depth (in/mm) ⁽²⁾	12/305			15.25/388		23/585	
Min. Supply Duct Size (in/mm)	7/178			8/204		5/127	
Quantity-Duct Connections	1			1		2	
Min. Supply Air Grille Size (sq in/sq cm)	100/646			140/904		150/968	
Min. Return Air Grille Size (sq in/sq cm)	200/1291			240/1549		250/1613	
Seawater Inlet Connection (in/mm)	¾ /16			¾ /16		¾ /16	
Net Weight (lbs/kg) ⁽⁴⁾	64/29.1	69.45/31.6	70/31.8	120/54.5		108.25/49.2	TBD
Gross Weight (lbs/kg) ⁽⁴⁾	73/33.2	81/36.8	82/37.2	130/59		125/57.4	TBD


¹ 'SVC' indicates stainless-steel chassis, 'VC' indicates painted galvanized metal chassis. 'D' in the model number indicates a digital control. Replace with 'M' for units with mechanical control. Add a 'Z' or 'Z50' after the capacity designator for 230V/60Hz or 220V/50Hz units, respectively.
Examples: VCD18K = 115V/50Hz; VCD18KZ = 230V/60Hz; VCD18KZ50 = 220V/50Hz.
² All dimensions ± 0.30 in. (8 mm).
³ 60Hz units must not operate at 50Hz and 50Hz units must not operate at 60Hz unless data plate states otherwise.
⁴ All weights ± 10%

Dimensions

Single-Blower 18,000 & 27,000 BTU/h Models

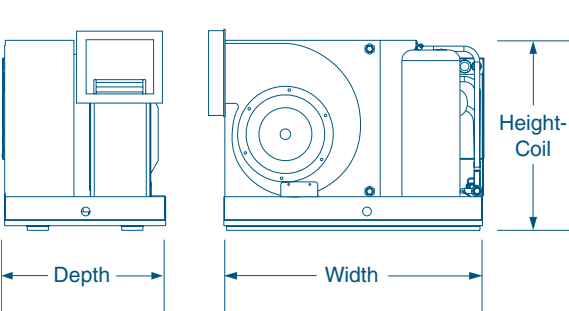

Dual-Blower 30,000 BTU/h Model

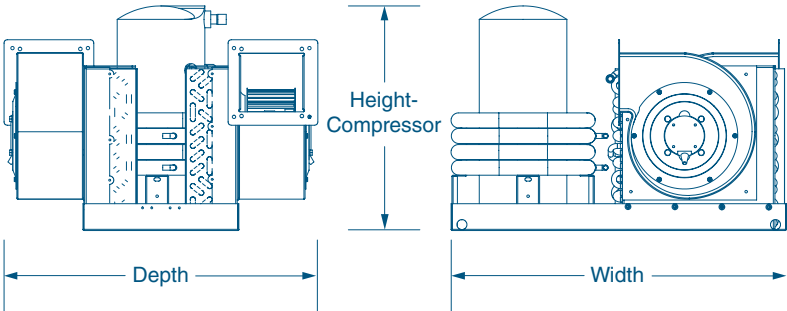

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2769 Rev. 20150410 Specifications and availability subject to change without notice.

Dealer



NEW

Vectronic Air Conditioning

Dedicated to Cooling for Electronics & Machinery



The Vectronic air conditioning system is specifically designed to cool on-board electronics and other equipment to prevent critical components from overheating which could lead to device failure or fire safety issues.

The Vectronic is a water-cooled self-contained A/C system with a capacity of 18,000 BTUs. Its custom digital controller and circuit board are mounted to the unit and provide precise operation to maintain ideal temperatures.

Installation is simple, with no ducting required. Just hook up plumbing and power. The rotatable blower lets you direct air flow where it is needed most.

The compact unit can fit easily under consoles, in engine rooms, and other locations where equipment cooling is required. Its marine-optimized design includes a stainless-steel drain pan with three drain points for rapid removal of condensate water. A built-in sound cover reduces compressor noise by up to 50%.



Digital Passport Compact keypad/control with LED read-out is mounted on the unit.

Key Benefits

- Designed for equipment cooling with return-air temperatures of 85°-105°F (29°-41°C)
- Heresite coated coil for corrosion resistance
- Blower discharge includes safety protection grid
- Heavy-duty air filter included
- Stainless-steel drain pan
- Black aluminum cover and shroud
- Threaded seawater fittings eliminate barb connections
- Simple Passport I/O control with special 85°-105°F set point mounted on unit
- Fan set to continuous operation
- 230V/50 or 60Hz models available
- Ignition protected
- Built-in sound cover reduces compressor noise by up to 50%
- Vertical blower discharge, rotatable to horizontal discharge
- CE approved

Special Options


- Optional Easy Start reduces compressor start amps, fits easily in the electrical box

Specifications for Vectronic Air Conditioning

Model ⁽¹⁾	VECU18KZ50-HV
Capacity (BTU/h)	18000
Voltage (V)	220
Cycle (Hz)/Phase (Ph)	50/1
Full Load Amps (FLA) Cool (A)	5.7
Full Load Amps (FLA) Heat (A)	7
Locked Rotor Amps (LRA) (A)	26
Max. Circuit Breaker (A)	20
Min. Circuit Ampacity (A)	13
Refrigerant Type	410A
Max. Height (in/mm)	13.33/339
Width (in/mm)	21.03/535
Max. Depth (in/mm)	12.1/308
Net Weight (lbs/kg)	69.5/31.6
Gross Weight (lbs/kg)	79/35.9

¹ A 230V/60Hz model is available (VECU18K-HV).

Dimensions

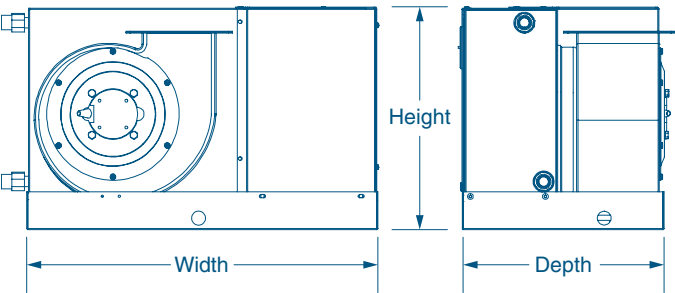

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3251 Rev. 20131004 Specifications and availability subject to change without notice.

Dealer



Emerald Series (6K-16K) Condensers

Innovative Chassis Conquers Installation Challenges



After listening to boat builders, global service teams and boat owners, Dometic engineers designed the innovative Emerald Condenser series to harness and maximize the impressive performance of R-410A refrigerant while meeting all international clean air standards.

The increase in BTU capacity is due primarily to the improved refrigerant metering design. The bi-flow thermal expansion valve for cooling provides up to a 14% increase in system capacity, which, when combined with a separate metering system for heating, attains an increase of up to 10% in heating performance. The amperage reduction of up to 27% is due to the more efficient design of the rotary compressor and properly sized refrigerant components.

The compact design of the Emerald series incorporates built-in vibration-isolating mounts, two large drain connections and numerous mounting options for installation to a smooth deck, stringer or existing rack. The incorporated lifting handles and smooth bottom allows for easy lifting and quick placement of the unit. The molded composite no-rust drain pan is shaped to provide positive drainage even when the boat heaves and rolls. The amount of standing water in the drain pan is reduced by up to 85%, which is 8x times less than a typical drain pan.

Emerald condensers can be installed quickly and easily. The drain, seawater and refrigerant connections are conveniently located to conquer installation challenges thus reducing installation time by up to fifteen minutes. The electrical box can be easily removed and located up to 5 ft. (1.5 m) away, further reducing the size of the unit while making the system more accessible. The reversing valve, pressure switches and service ports are centrally located, high on the unit for access from any side.



The reversing valve, pressure switches, and service ports are centrally located for easy maintenance access from any side.



Vibration-isolating compressor mounting system reduces noise and vibration.

Key Benefits

- Up to 17.5% increase in BTU capacity
- Up to 41% amperage reduction
- Up to 32% reduced start-up amps
- Up to 16% smaller
- Up to 25% lighter
- Up to 85% reduction in standing water in the drain pan
- Up to 15 minutes faster to install
- Square chassis for easy installation in tight spaces
- Three mounting options adapt to installation environments
- Rust-free composite drain pan
- Reconfigurable chassis allows optimal drain connections
- Compressor vibration-isolation mounts minimize noise and vibration
- Built-in refrigerant line filter drier reduces installation time and protects the compressor from moisture and contaminants
- Reversing valve, pressure switches, and service ports centrally located for easy maintenance access from any side
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant

Specifications for Emerald Series (6K-16K) Condensers

Model ⁽¹⁾	E*6	E*8	E*10	E*12	E*16
Capacity (BTU/h) ⁽²⁾	6000	8000	10000	12000	16000
Voltage (V)	115	230	240	230	240
Cycle (Hz) ⁽³⁾ / Phase (Ph)	60/1	50/1	50/1	50/1	50/1
Full Load Amps (FLA) Cool (A)	3.8	1.8	2.4	2.6	2.8
Full Load Amps (FLA) Heat (A)	5.1	2.44	3.3	3.6	3.8
Locked Rotor Amps (LRA) (A)	36	17.5	17.7	22	21
Max. Circuit Breaker (A)	15	10	15	10	15
Min. Circuit Ampacity (A)	11	7	11	9	8
Refrigerant Type	410A	410A	410A	410A	410A
Water Flow (lpm)	1.5/5.7	2/7.6	2.5/9.5	3/11.4	4/15.2
Max. Height (in/mm) ⁽⁴⁾	12/305	12/305	13/331	13/331	14.1/359
Width (in/mm) ⁽⁵⁾	13.3/338	13.3/338	13.3/338	13.3/338	13.3/338
Depth-Without Elec. Box (in/mm) ⁽⁵⁾	13.3/338	13.3/338	13.3/338	13.3/338	13.3/338
Depth-With Elec. Box (in/mm) ⁽⁵⁾	15.1/384	15.1/384	15.1/384	15.1/384	15.1/384
Seawater Inlet Connection (in/mm)	3/8	1/2	3/8	3/8	3/8
Seawater Connection Type	cupranickle tube	cupranickle tube	cupranickle tube	cupranickle tube	cupranickle tube
Refrigerant Line Connection-Discharge (in)	1/4	1/4	1/4	1/4	1/4
Refrigerant Line Connection-Suction (in)	3/8	3/8	3/8	3/8	3/8
Net Weight (lbs/kg) ⁽⁴⁾	43/19.6	42.05/19.1	45/20.5	44.25/20.1	49/22.3
Gross Weight (lbs/kg) ⁽⁴⁾	50/22.7	49.5/22.5	50/22.7	50.5/23	56/25.5
Height-Electrical Box (in/mm)	8.75/223	8.75/223	8.75/223	8.75/223	8.75/223
Width-Electrical Box (in/mm)	6.5/166	6.5/166	6.5/166	6.5/166	6.5/166
Depth-Electrical Box (in/mm)	2.63/67	2.63/67	2.63/67	2.63/67	2.63/67

¹ Replace "x" in the model name with "D" for Passport I/O digital control system, or "M" for electro-mechanical control.


² BTU and electrical data are based on a 45°F/7.2°C evaporator and 100°F/37.8°C condenser in cool mode, and a 45°F/7.2°C evaporator and 130°F/54.4°C condenser in heat mode.

³ 60Hz units must not operate at 50Hz and 50Hz units must not operate at 60Hz unless data plate says otherwise.

⁴ All weights ± 10%.

⁵ All dimensions ± 10 mm.

Dimensions

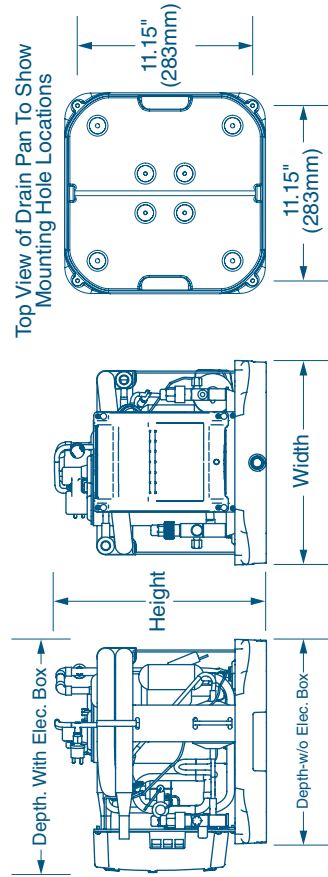

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2703A Rev. 2014.1024



Specifications and availability subject to change without notice.

Dealer

Emerald Series (24K-72K) Condensers

Innovative Chassis Conquers Installation Challenges



After listening to boat builders, global service teams and boat owners, Dometic engineers designed the innovative Emerald Condenser series to harness and maximize the impressive performance of R-410A refrigerant while meeting all international clean air standards.

The compact design of the Emerald series incorporates built-in vibration-isolating mounts, two large drain connections and numerous mounting options for installation to a smooth deck, stringer or existing rack. The incorporated lifting handles and smooth bottom allows for easy lifting and quick placement of the unit. The molded composite no-rust drain pan is shaped to provide positive drainage even when the boat heaves and rolls. The amount of standing water in the drain pan is reduced by up to 85%, which is 8x times less than a typical drain pan.

Emerald condensers can be installed quickly and easily. The drain, seawater and refrigerant connections are conveniently located to conquer installation challenges thus reducing installation time by up to fifteen minutes. The electrical box can be easily removed and located up to 5 ft. (1.5 m) away, further reducing the size of the unit while making the system more accessible. The reversing valve, pressure switches and service ports are centrally located, high on the unit for access from any side.



The reversing valve, pressure switches, and service ports are centrally located for easy maintenance access from any side.



Vibration-isolating compressor mounting system reduces noise and vibration.

Key Benefits

- Up to 85% reduction in standing water in the drain pan
- Up to 15 minutes faster to install
- Square chassis for easy installation in tight spaces
- Three mounting options adapt to installation environments
- Rust-free composite drain pan
- Reconfigurable chassis allows optimal drain connections
- Compressor vibration-isolation mounts minimize noise and vibration
- Built-in refrigerant line filter drier reduces installation time and protects the compressor from moisture and contaminants
- Reversing valve, pressure switches, and service ports centrally located for easy maintenance access from any side
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant

Specifications for Emerald Series (24K-72K) Condensers

Model ⁽¹⁾	E*24	E*30	E*36	E*48	E*60
Capacity (BTU/h) ⁽²⁾	24000	30000	36000	48000	60000
Voltage (V)	230	230	230	230	230
Cycle (Hz) ⁽³⁾ / Phase (Ph)	60/1	60/3	50/1	50/3	50/3
Full Load Amps (FLA) Cool (A)	6.3	2.7	7.9	9.4	6.3
Full Load Amps (FLA) Heat (A)	7.8	3.6	9.9	11.5	8.3
Locked Rotor Amps (LRA) (A)	43	46	55.4	28	38
Max. Circuit Breaker (A)	30	20	15	40	45
Min. Circuit Ampacity (A)	17	18	14	10	22
Refrigerant Type	410A	410A	410A	410A	410A
Max. Height (in/mm) ⁽⁴⁾	18/458	18/458	18/458	18.5/470	20/508
Width (in/mm) ⁽⁴⁾	16/407	16/407	16/407	16/407	16/407
Depth-Without Elec. Box (in/mm) ⁽⁴⁾	16/407	16/407	16/407	16/407	16/407
Depth-With Elec. Box (in/mm) ⁽⁴⁾	18.8/478	18.8/478	18.8/478	18.8/478	18.8/478
Seawater Inlet Connection (in/mm)	5/16	5/16	5/16	5/16	5/16
Seawater Connection Type	cupranickle tube	cupranickle tube	cupranickle tube	cupranickle tube	cupranickle tube
Refrigerant Line Connection-Discharge (in)	3/8	3/8	3/8	3/8	3/8
Refrigerant Line Connection-Suction (in)	5/8	3/4	3/4	3/4	3/4
Net Weight (lbs/kg) ⁽⁵⁾	98.5/44.7	104/47.2	87/39.5	100/45.4	114.5/52
Gross Weight (lbs/kg) ⁽⁵⁾	129/58.6	133/60.4	117.55/53.4	132/59.9	147/66.7
Height-Electrical Box (in/mm)	13.25/337	13.25/337	13.25/337	13.25/337	13.25/337
Width-Electrical Box (in/mm)	7.75/197	7.75/197	7.75/197	7.75/197	7.75/197
Depth-Electrical Box (in/mm)	3.75/96	3.75/96	3.75/96	3.75/96	3.75/96

¹ Replace "*" in the model name with "D" for Passport I/O digital control system, or "M" for electro-mechanical control.


² BTU and electrical data are based on a 45°F/7.2°C evaporator and 100°F/37.8°C condenser in cool mode, and a 45°F/7.2°C evaporator and 130°F/54.4°C condenser in heat mode.

³ 60Hz units must not operate at 50Hz and 50Hz units must not operate at 60Hz unless data plate says otherwise.

⁴ All dimensions ± 0.30 in. (8 mm).

⁵ All weights ± 10%

Dimensions

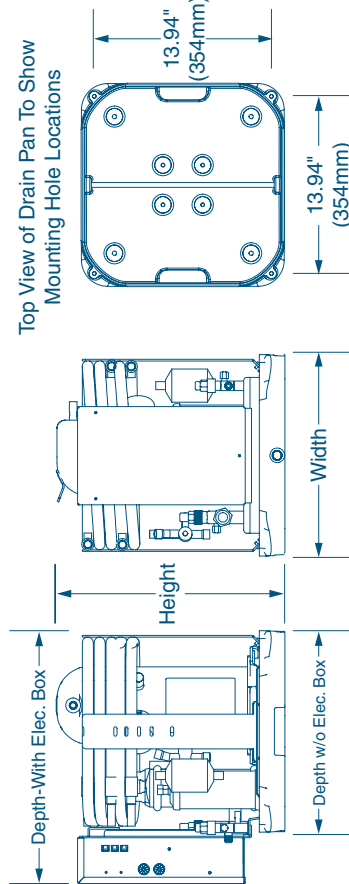

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2703B Rev. 2014.1024

Dealer



Specifications and availability subject to change without notice.

NEW

TurboVap Series Evaporators

Reduced Size, Noise & Power Draw



The TurboVap Series of direct expansion (DX) split-gas evaporators for boats is based on the revolutionary engineering advancements of the award-winning Turbo self-contained air conditioning system. Featuring a rust-free molded composite drain pan, condensate water is rapidly removed at one of two easy-to-plumb drain locations. The pan also has innovatively designed anti-slosh ridges and "positive flow" channels to ensure condensate does not spill even in the roughest seas.

For improved installation ease and flexibility, the enclosed blower motor eliminates overhang and the blower can be rotated 270° with a single adjustment screw. The unit's unique inlet ring is designed to optimize air flow and ensure that the height of the unit does not increase when the blower rotates. The fully insulated, high-velocity blowers are quiet and efficient.

Experience better noise reduction with the TurboVap Series' built-in cushioning system which minimizes vibration to the deck. Additionally, the innovative mounting clips utilize vibration isolators.

TurboVap units can be paired with condensers that use either R-22 or R-417A refrigerants. See the Emerald Series of TurboVaps and condensers for a complete split system that uses R-410A refrigerant.



The rust-free composite drain pan reduces standing water up to 85%, thanks to "positive-flow" drain channels. These channels also help prevent spilling and sloshing in rough seas.



Optional lineset extensions for discharge and suction are available for all TurboVap models.

Key Benefits


- Up to 28% reduced amperage
- Up to 85% reduction in standing water in the drain pan
- Up to 14% increase in cooling capacity
- Up to 15% lighter
- Up to 17% reduction in height
- Up to 19% increased air flow CFM
- Rust-free composite drain pan
- Drain pan features anti-slosh, "positive-flow" drain channels for no spills and rapid removal of condensate
- Up to 15 minutes faster to install
- Single adjustment screw for 270° of blower rotation
- High-velocity (HV) fully-insulated blowers are rotatable
- Vibration-isolation mounts reduce noise and vibration
- 115V and 230V models
- Can be used with R-22 or R-417A condensers

Specifications for TurboVap Series Evaporators

Model ⁽¹⁾	TV4		TV6		TV8		TV10		TV12		TV16	
Capacity (BTU/h)	4000		6000		8000		10000		12000		16000	
Voltage @ 50/60Hz 1-Ph (V)	115	230	115	230	115	230	115	230	115	230	115	230
Full Load Amps (FLA) Cool (A)	0.82	0.41	0.82	0.41	1.56	0.83	1.14	0.61	1.14	0.61	1.61	0.78
Max. Circuit Breaker (A)	5		5		5		5		5		5	
Min. Circuit Ampacity (A)	2	1	2	1	2		2	1	2	1	3	1
Height-Coil (in/mm) ⁽²⁾	10.8/275		10.8/275		10.8/275		12.6/321		12.6/321		13/331	
Height-Blower (in/mm) ⁽²⁾	10.8/275		10.8/275		11.4/290		12.6/321		12.6/321		13.6/346	
Width (in/mm) ⁽²⁾	12.3/313		12.3/313		12.3/313		14.3/364		14.3/364		14.3/364	
Depth (in/mm) ⁽²⁾	9.5/242		9.5/242		9.4/239		10.4/265		10.4/265		11.6/295	
Min. Supply Duct Size (in/mm)	4/102		4/102		5/127		6/153		6/153		7/178	
Min. Supply Air Grille Size (sq in/sq cm)	32/207		32/207		48/310		60/388		70/452		81/523	
Min. Return Air Grille Size (sq in/sq cm)	64/413		64/413		80/517		110/710		130/839		160/1033	
Net Weight (lbs/kg) ⁽³⁾	10.5/4.8		11/5		13.9/6.4	14/6.4	17.5/8		17/7.8	17.5/8	19.8/9	21/9.6
Gross Weight (lbs/kg) ⁽³⁾	18/8.2		19/8.7		20.75/9.5	22/10	25.5/11.6	25/11.4	24/10.9	25.5/11.6	26.75/12.2	28.25/12.9

¹ Add "115V" or "230V" to the model number for 115V and 230V units, respectively.
² All dimensions ± 0.30 in. (8 mm).
³ All weights ± 10%

Dimensions

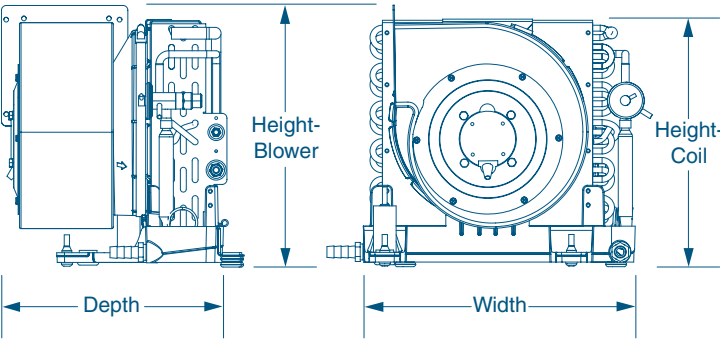

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2696A Rev. 20120803 Specifications and availability subject to change without notice.

Dealer



NEW

Emerald TurboVap Series Evaporators

Reduced Size, Noise & Power Draw



The Emerald TurboVap series of split-gas evaporators for boats incorporates revolutionary design features with mechanical engineering that maximizes the effectiveness of R-410A, an environmentally safe refrigerant.

Emerald TurboVaps are easy to install. For ideal positioning, the high-velocity blower can rotate up to 270 degrees with a single adjustment screw. The enclosed motor means no blower-motor overhang for a compact design.

Since evaporators are usually positioned in or near cabins, noise is always a concern. The Emerald TurboVap uses a vibration-isolation mounting system to minimize noise, so the evaporator runs more quietly. The fully insulated, high-velocity blowers are quiet and efficient.

Excellent condensate drainage is achieved with a unique positive-flow, anti-slosh, composite drain pan that is rust-free. Condensate water is rapidly removed at one of two easy-to-plumb drain locations.

The Emerald TurboVap Series was designed to operate as a system with the Emerald Condenser Series. Both of these split-system components were engineered to harness and maximize the superior thermodynamic properties of the environmentally safe R-410A refrigerant.

The Emerald TurboVap is available in six capacities ranging from 4,000 to 16,000 BTU/hr.

Key Benefits

- Up to 28% reduced amperage
- Up to 85% reduction in standing water in the drain pan
- Up to 14% increase in cooling capacity
- Up to 15% lighter
- Up to 17% reduction in height
- Up to 19% increased air flow CFM
- Rust-free composite drain pan
- Drain pan features anti-slosh, "positive-flow" drain channels for no spills and rapid removal of condensate
- Up to 15 minutes faster to install
- Single adjustment screw for 270° of blower rotation
- High-velocity (HV) fully-insulated blowers are rotatable
- Vibration-isolation mounts reduce noise and vibration
- 115V and 230V models
- Designed to be used with Emerald Series (R-410A) condensers



The rust-free composite drain pan reduces standing water up to 85%, thanks to "positive-flow" drain channels. These channels also help prevent spilling and sloshing in rough seas.



Optional lineset extensions for discharge and suction are available for all TurboVap models.

Specifications for Emerald TurboVap Series Evaporators


Model ⁽¹⁾	TVE4		TVE6		TVE8		TVE10		TVE12		TVE16	
Capacity (BTU/h)	4000		6000		8000		10000		12000		16000	
Voltage @ 50/60Hz 1-Ph (V)	115	230	115	230	115	230	115	230	115	230	115	230
Full Load Amps (FLA) Cool (A)	0.82	0.41	0.82	0.41	1.56	0.83	1.14	0.61	1.14	0.61	1.61	0.78
Max. Circuit Breaker (A)	5		5		5		5		5		5	
Min. Circuit Ampacity (A)	2	1	2	1	2		2	1	2	1	3	1
Height-Coil (in/mm) ⁽²⁾	10.8/275		10.8/275		10.8/275		12.6/321		12.6/321		13/331	
Height-Blower (in/mm) ⁽²⁾	10.8/275		10.8/275		11.4/290		12.6/321		12.6/321		13.6/346	
Width (in/mm) ⁽²⁾	12.3/313		12.3/313		12.3/313		14.3/364		14.3/364		14.3/364	
Depth (in/mm) ⁽²⁾	9.5/242		9.5/242		9.4/239		10.4/265		10.4/265		11.6/295	
Min. Supply Duct Size (in/mm)	4/102		4/102		5/127		6/153		6/153		7/178	
Min. Supply Air Grille Size (sq in/sq cm)	32/207		32/207		48/310		60/388		70/452		81/523	
Min. Return Air Grille Size (sq in/sq cm)	64/413		64/413		80/517		110/710		130/839		160/1033	
Net Weight (lbs/kg) ⁽³⁾	10.5/4.8	11.25/5.2	12/5.5	12.25/5.6	14/6.4		17.5/8		17.5/8	17.75/8.1	20.5/9.3	21/9.6
Gross Weight (lbs/kg) ⁽³⁾	18.5/8.4	18/8.2	19/8.7	20.25/9.2	22/10		25.5/11.6	25/11.4	25.5/11.6	24.75/11.3	28/12.8	28.5/13

¹ Add '115V' or '230V' to the model number for 115V and 230V units, respectively.

² All dimensions ± 0.30 in. (8 mm).

³ All weights ± 10%

Dimensions

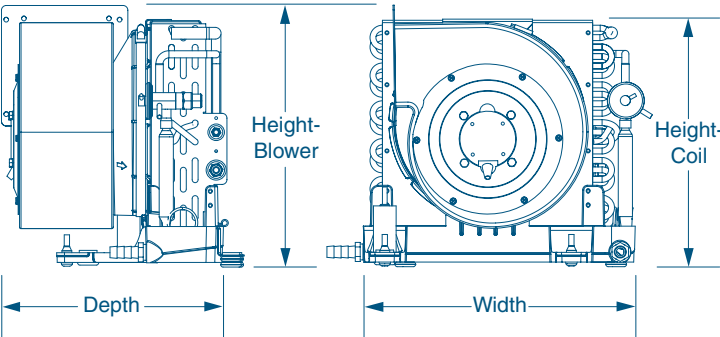

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



CS Series (6K-16K) Condensers

High-Efficiency Cooling & Heating



The CS series of condensing units for boats provides heating and cooling in a highly efficient package. The hermetically sealed, high-efficiency compressor reduces amp draw while pressure switches, thermal-overload, and start components provide constant system protection and proper operation. In addition, the expansion device and check-valve assemblies control load balancing during operation. The copper-encased cupronickel condenser coils are highly resistant to corrosion caused by continuous seawater flow.

The symmetrical base design provides optimum space efficiency and installation flexibility for easy handling and positioning of the unit. A built-in hose barb aids in complete condensate removal from the drain pan. Two sets of vibration isolators ensure quiet operation.

The electrical box can be mounted remotely. It has a moisture-resistant design with a corrosion-resistant enclosure. CS Digital (CSD) units include the Passport I/O circuit board.

As with all Marine Air products, quality is assured. Each unit is pre-charged, test-run in all operating modes, and leak-checked at the factory prior to shipping. All surface components are constructed of or coated with materials resistant to fire and corrosion. Charge Guard® protection provides sealed access ports that ensure environmental protection and system integrity. All CS condensing units meet or exceed applicable ABYC and US Coast Guard regulations, CE directives, and general Air Conditioning and Refrigeration Industry (ARI) standards.

Key Benefits

- High-efficiency condensers
- Valves and switches provide load balancing and constant system protection
- Symmetrical base for installation flexibility and ease of handling
- Electrical box can be mounted remotely
- Passport I/O circuit board included
- Charged, tested, and leak checked at the factory
- Meets or exceeds all applicable standards and regulation

Specifications for CS Series (6K-16K) Condensers

Model ⁽¹⁾	CSD6			CSD9			CSD12			CSD16		
Capacity (BTU/h) ⁽²⁾	6000			9000			12000			16000		
Voltage (V)	115	230	240	115	230	240	115	230	240	115	230	240
Cycle (Hz) ⁽³⁾ /Phase (Ph)	60/1		50/1	60/1		50/1	60/1		50/1	60/1		50/1
Full Load Amps (FLA) Cool (A)	7	3.7	4.1	6.4	3.2	4.6	9.2	4.4	5.4	12.2	5.7	7
Full Load Amps (FLA) Heat (A)	7.7	4	4.8	7.2	3.6	5.2	11.1	5	6	13.5	6.4	8
Locked Rotor Amps (LRA) (A) ⁽⁴⁾	34	20	21.2	40	20	25.6	50	31		75	36	39
Max. Circuit Breaker (A) ⁽⁵⁾	20	10		20	10	15	35	15		40	20	25
Min. Circuit Ampacity (A)	13	8	7	13	7	10	21	10	11	25	12	15
Refrigerant Type	417A			417A			417A			417A		
Max. Height (in/mm) ⁽⁶⁾	15.2/387			15.2/387			15.2/387			15.2/387		
Width (in/mm) ⁽⁷⁾	13.13/334			13.13/334			13.13/334			13.13/334		
Depth (in/mm) ⁽⁷⁾	13.13/334			13.13/334			13.13/334			13.13/334		
Seawater Inlet Connection (in/mm)	5⁄8 /16			5⁄8 /16			5⁄8 /16			5⁄8 /16		
Refrigerant Line Connection-Discharge (in)	1⁄4			1⁄4			1⁄4			1⁄4		
Refrigerant Line Connection-Suction (in)	3⁄8			3⁄8			3⁄8			1⁄2		
Net Weight (lbs/kg) ⁽⁸⁾	56/25.5			63/28.6	62.5/28.4	64/29.1	64.5/29.3		66/30	66.25/30.1	66/30	75/34.1
Gross Weight (lbs/kg) ⁽⁸⁾	63/28.6			85.5/38.8	85/38.6	74/33.6	87/39.5		75/34.1	90/40.9	87/39.5	96/43.6

¹ 'D' in the model number indicates a digital control. Replace with 'M' for units with mechanical control. Add a 'Z' for 230V/60Hz units or 'Z50' for 240V/50Hz units. For example: CSD12K=115V/60Hz; CSD12KZ=230V/60Hz; CSD12KZ50=240V/50Hz

² BTU and electrical data are based on a 45°F/7.2°C evaporator and 100°F/37.8°C condenser in cool mode, and a 45°F/7.2°C evaporator and 130°F/54.4°C condenser in heat mode.

³ Some 60Hz units may be operated at 50Hz but at reduced voltages that will result in a loss of capacity and higher or lower amp draw than listed. Dedicated 50Hz units are available that provide the full rated capacity, but these units must not be operated.

⁴ Varies with voltage and load, and may be higher or lower than listed.


⁵ Specification is for reverse-cycle units. Cool-only units may use smaller circuit breakers.

⁶ Combined height of unit and electrical box. Subtract 2.60 in. (66 mm) for remotely-mounted electrical box. All dimensions ± 0.25 in. (6 mm).

⁷ All dimensions ± 0.25 in. (6 mm).

⁸ Based on 60Hz/1-phase units. All weights ± 10%

Dimensions

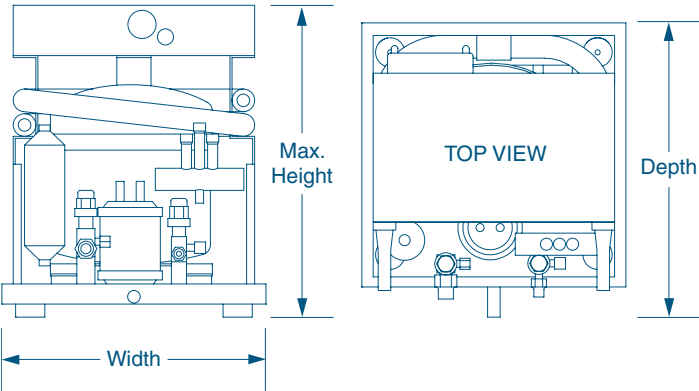

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2125 Rev. 20130222 Specifications and availability subject to change without notice.

Dealer



CS Series (24K-60K) Condensers

High-Efficiency Cooling & Heating



The CS series of condensing units for boats provides heating and cooling in a highly efficient package. The hermetically sealed, high-efficiency compressor reduces amp draw while pressure switches, thermal-overload, and start components provide constant system protection and proper operation. In addition, the expansion device and check-valve assemblies control load balancing during operation. The copper-encased cupronickel condenser coils are highly resistant to corrosion caused by continuous seawater flow.

The symmetrical base design provides optimum space efficiency and installation flexibility for easy handling and positioning of the unit. A built-in hose barb aids in complete condensate removal from the drain pan. Two sets of vibration isolators ensure quiet operation.

The electrical box can be mounted remotely. It has a moisture-resistant design with a corrosion-resistant enclosure. CS Digital (CSD) units include the Passport I/O circuit board.

As with all Marine Air products, quality is assured. Each unit is pre-charged, test-run in all operating modes, and leak-checked at the factory prior to shipping. All surface components are constructed of or coated with materials resistant to fire and corrosion. Charge Guard® protection provides sealed access ports that ensure environmental protection and system integrity. All CS condensing units meet or exceed applicable ABYC and US Coast Guard regulations, CE directives, and general Air Conditioning and Refrigeration Industry (ARI) standards.

Key Benefits

- High-efficiency condensers
- Valves and switches provide load balancing and constant system protection
- Symmetrical base for installation flexibility and ease of handling
- Electrical box can be mounted remotely
- Passport I/O circuit board included
- Charged, tested, and leak checked at the factory
- Meets or exceeds all applicable standards and regulation

Specifications for CS Series (24K-60K) Condensers

Model ⁽¹⁾	CSD24			CSD30			CSD36				CSD48				CSD60
Capacity (BTU/h) ⁽²⁾	24000			30000			36000				48000				60000
Voltage (V)	230	240	380	230		240	230		240	380	230		240	380	230
Cycle (Hz) ⁽³⁾ /Phase (Ph)	60/1	50/1	50/3	60/1	60/3	50/1	60/1	60/3	50/1	50/3	60/1	60/3	50/1	50/3	60/1
Full Load Amps (FLA) Cool (A)	7.6	6.9	2.6	7.7	6.5	8.5	9.2	7.1	11.7	4.3	11.4	8.2	22.3	5	17.2
Full Load Amps (FLA) Heat (A)	9.5	8.5	3.5	9.6		10.6	11.7	7.9	13.9	5.4	14.5	9.7	24.8	6.5	22
Locked Rotor Amps (LRA) (A) ⁽⁴⁾	55		29	61	58	70	73	68	85	40	86	78	132.2	60	132.2
Max. Circuit Breaker (A) ⁽⁵⁾	35	30	10	40	30	35	45	30	50	15	55	35	80	20	80
Min. Circuit Ampacity (A)	22	19	9	24	17	22	28	17	29	11	33	20	46	14	46
Refrigerant Type	417A			417A			417A				417A				417A
Max. Height (in/mm) ⁽⁶⁾	21/534			21.5/547			25.5/648				25.5/648				28/712
Width (in/mm) ⁽⁷⁾	16/407			16/407			16/407				16/407				24/610
Depth (in/mm) ⁽⁷⁾	16/407			16/407			16/407				16/407				24/610
Seawater Inlet Connection (in/mm)	5/8 /16			5/8 /16			5/8 /16				5/8 /16				5/8 /16
Refrigerant Line Connection-Discharge (in)	3/8			3/8			3/8				3/8				3/8
Refrigerant Line Connection-Suction (in)	5/8			3/4			3/4				3/4				3/4
Net Weight (lbs/kg) ⁽⁸⁾	115/52.2	123.3/56	115/52.2	127/57.7			0/0	135/61.3			145/65.8				173/78.5
Gross Weight (lbs/kg) ⁽⁸⁾	120/54.5	0/0	120/54.5	132/59.9			198/89.9	140/63.6			150/68.1				181/82.2

¹ 'D' in the model number indicates a digital control. Replace with 'M' for units with mechanical control. Add a 'Z' for 230V/60Hz units or 'Z50' for 240V/50Hz units. For example: CSD12K=115V/60Hz; CSD12KZ=230V/60Hz; CSD12KZ50=240V/50Hz

² BTU and electrical data are based on a 45°F/7.2°C evaporator and 100°F/37.8°C condenser in cool mode, and a 45°F/7.2°C evaporator and 130°F/54.4°C condenser in heat mode.

³ Some 60Hz units may be operated at 50Hz but at reduced voltages that will result in a loss of capacity and higher or lower amp draw than listed. Dedicated 50Hz units are available that provide the full rated capacity, but these units must not be operated.

⁴ Varies with voltage and load, and may be higher or lower than listed.


⁵ Specification is for reverse-cycle units. Cool-only units may use smaller circuit breakers.

⁶ Combined height of unit and electrical box. Subtract 3.60 in. (92 mm) for remotely-mounted electrical box.

⁷ All dimensions ± 0.25 in. (6 mm).

⁸ Based on 60Hz/1-phase units. All weights ± 10%

Dimensions

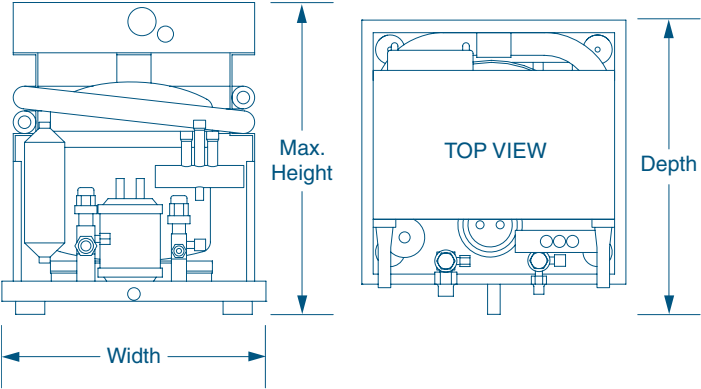

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2126 Rev. 20130208 Specifications and availability subject to change without notice.

Dealer



EBE Series R-410A Evaporators

The New Standard In Marine High-Performance Evaporators



Compact EBE split evaporators for boats are draw-through, ductable cooling units with reverse-cycle heating. Featuring a rotatable, high-efficiency permanent split capacitor (PSC) blower in which the motor is concealed, EBE series evaporators are available in capacities from 6K to 36K BTU/hr. EHBE units have electric heat.

The EBE Series was designed for installation low in a closet, cabinet, or other enclosed space, with discharge air ducted to one or more grilles high in the cabin. EBE units can be used with a combination of plenums and flexible duct, or built-in ductwork may be used. If you are using built-in ductwork, a flexible transition between the blower and duct should be installed.

Vibration-isolation mounting is built into each EBE unit to reduce noise and vibration. The PSC blower is supported by a sturdy aluminum bracket with isolation grommets to reduce possible vibration. The blower's internal motor housing reduces the overall unit depth for easier installation and promotes quieter operation.

The drain pan and blower housing are covered with insulating foam which reduces noise and secondary condensation.

The "positive flow" drain pan has an anti-slosh, antifungal foam lining. Two 1/2 in. (13 mm) drains are located on the blower side of the drain pan.

Key Benefits


- Compact ductable cooling or heating units
- High-velocity (HV) fully-insulated blowers are rotatable
- Insulated condensate pan with anti-slosh, anti-fungal foam lining
- Available with electric heat (EHBE models)
- High-efficiency evaporator coil
- Larger blower inlet for increased air flow across the coil
- Blower support bracket with cushioned mounts to reduce noise and vibration
- Increased metal thickness on structural parts for added strength
- Thermal expansion valve for optimal performance over a range of conditions
- Designed to be used with Emerald Series (R-410A) condensers

Specifications for EBE Series R-410A Evaporators

Model ⁽¹⁾	EBE18	EBE24	EBE30	EBE36	EHBE8	EHBE10	EHBE12	EHBE16	EHBE24
Capacity (BTU/h)	18000	24000	30000	36000	8000	10000	12000	16000	24000
Voltage @ 50/60Hz 1-Ph (V)	230	230	230	230	230	230	230	230	230
Full Load Amps (FLA) Cool (A)	1.15	1.64	1.64	7.3	0.98	0.66	0.56	0.88	1.64
Full Load Amps (FLA) Heat (A)	N/A	N/A	N/A	N/A	5.4	7.2	9.26	9.58	14.68
Full Load Amps (FLA) Blower (A)	1.15	1.64	4	4	0.98	0.66	0.56	1.15	1.64
Max. Circuit Breaker (A)	5	5	5	10	10	10	10	10	20
Min. Circuit Ampacity (A)	2	3	3	10	6	8	10	10	16
Electric Heat (kW/hp)	N/A	N/A	N/A	N/A	1/1.4	1.5/2.1	2/2.7	2/2.7	3/4.1
Heater Amps (A)	N/A	N/A	N/A	N/A	4.35	6.52	8.7	8.7	13.04
Air Flow (cfm/m3h)	540/918	800/1360	1000/1700	1200/2039	266/452	333/566	400/680	533/906	800/1360
Height-Coil (in/mm) ⁽²⁾	13.63/347	16.5/420	20.5/521	20.5/521	11.25/286	12.5/318	12.5/318	13.5/343	16.5/420
Height-Blower (in/mm)	15.13/385	17/432	22/559	22.25/566	12.5/318	13.5/343	13.5/343	15.5/394	17/432
Width (in/mm) ⁽²⁾	16/407	20/508	20.75/528	20.75/528	13.75/350	14.25/362	14.25/362	16/407	20/508
Depth (in/mm) ⁽²⁾	14/356	14.5/369	15/381	17.75/451	12/305	13.75/350	14.5/369	14.75/375	15/381
Min. Supply Duct Size (in/mm)	7/178	9/229	10/254	10/254	6/152	6/152	6/152	7/178	9/229
Min. Supply Air Grille Size (sq in/sq cm)	100/645	140/903	170/1097	196/1265	49/316	60/387	70/452	80/516	140/903
Min. Return Air Grille Size (sq in/sq cm)	200/1290	240/1548	350/2258	360/2323	98/632	100/645	130/839	160/1032	240/1548
Net Weight (lbs/kg) ⁽³⁾	27/12.3	37.65/17.1	36/16.4	41.75/19	21/9.6	23/10.5	23/10.5	28/12.8	44.75/20.3
Gross Weight (lbs/kg) ⁽³⁾	35/15.9	49.5/22.5	42/19.1	56.5/25.7	29/13.2	31/14.1	31.5/14.3	36/16.4	56.25/25.6

¹ 'EBE' indicates evaporator without electric heat; 'EBHE' indicates evaporator with electric heat. Dometic Marine also offers an EBHE6-1KW and EBHE16-3KW. For more information please contact a sales representative at 954-973-2477.
² All dimensions ± 0.30 in. (8 mm).
³ All weights ± 10%

Dimensions

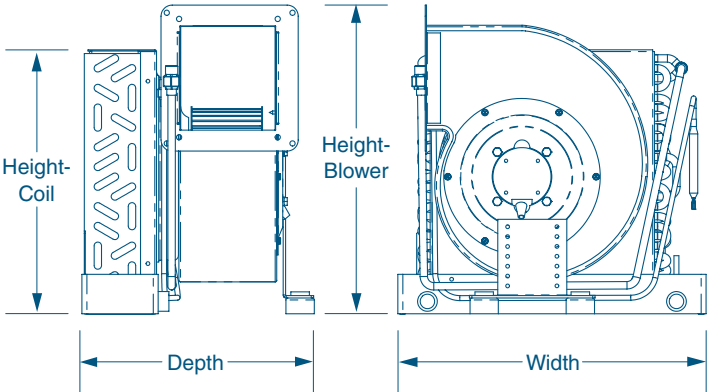

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2855 Rev. 20120803 Specifications and availability subject to change without notice.

Dealer



EFD 2-Ton Evaporator

High-Capacity Marine Unit for R-22 or R-417A Condensers



Marine Air's EFD 24,000 BTU/hr evaporator for split-system air conditioning features a compact, modular design. For maximum efficiency, the plenum chambers are increased and the coil has enhanced fins and rifled tubing. This unit also offers easy disassembly for access to components for maintenance. It works with Marine Air R-22 or R-417A condensers.

The centrifugal blower is quiet and efficient with a fully-insulated housing. For installation flexibility, the blower rotates to horizontal or vertical positions. The blower's internal motor reduces depth for easier installation. A thermoplastic mounting ring enables easy installation of ducting or transition box.

The condensate drain pan includes two ½ in. (13 mm) FPT drain hook-ups, and it is insulated to prevent sweating.

As with all Marine Air products, quality is assured. Each unit is pre-charged, test-run in all operating modes, and leak-checked at the factory prior to shipping. All surface components are constructed of or coated with materials resistant to fire and corrosion. Charge Guard® protection provides sealed access ports that ensure environmental protection and system integrity. Marine Air evaporators meet or exceed applicable ABYC and US Coast Guard regulations, CE directives, and general Air Conditioning and Refrigeration Industry (ARI) standards.

Key Benefits


- Compact high-efficiency 24,000 BTU/hr evaporator
- Easy disassembly for maintenance access
- High-velocity (HV) blower with internal motor to reduce depth
- Patented
- 1/2 in. (13 mm) FPT drain connections
- Blower support bracket with cushioned mounts to reduce noise and vibration
- Charged, tested, and leak checked at the factory
- Meets or exceeds all applicable standards and regulation

Specifications for EFD 2-Ton Evaporator

Model ⁽¹⁾	EFD24
Capacity (BTU/h)	24000
Voltage @ 50/60Hz 1-Ph (V)	230
Full Load Amps (FLA) Cool (A)	1.64
Full Load Amps (FLA) Blower (A)	1.64
Max. Circuit Breaker (A)	5
Min. Circuit Ampacity (A)	3
Height-Evaporator (in/mm) ⁽²⁾	16.5/420
Width (in/mm) ⁽²⁾	21.25/540
Depth (in/mm) ⁽²⁾	15.6/397
Min. Supply Duct Size (in/mm)	8/204
Min. Supply Air Grille Size (sq in/sq cm)	140/904
Min. Return Air Grille Size (sq in/sq cm)	240/1549
Refrigerant Line Connection-Discharge (in)	3/8
Refrigerant Line Connection-Suction (in)	5/8
Net Weight (lbs/kg) ⁽³⁾	37.95/17.3
Gross Weight (lbs/kg) ⁽³⁾	42.2/19.2

¹ Replace "M" in the model name with 'D' for Passport I/O digital control system, or 'M' for electro-mechanical control.
² All dimensions ± 0.30 in. (8 mm).
³ All weights ± 10%

Dimensions

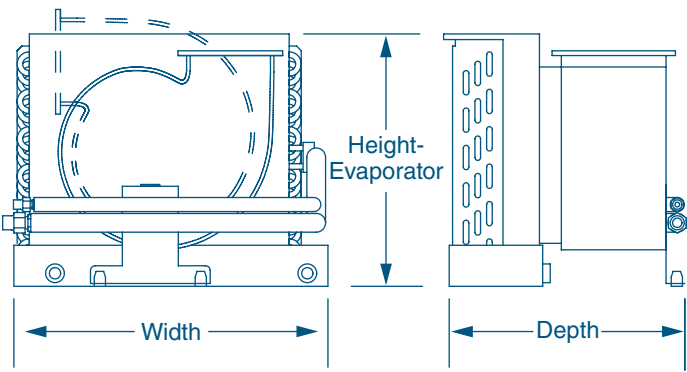

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2128 Rev. 20120803 Specifications and availability subject to change without notice.

Dealer



NEW

Variable Capacity Chiller

Smooth Transitions from 12,000 to 48,000 BTUs As Needed



Maximize chiller efficiency and reduce electrical load fluctuations with Dometic's innovative Variable Capacity Chiller (VARC48). At full speed, the VARC48 provides a nominal four tons of cooling or heating. It also has the ability to modulate its speed all the way down to one ton in order to precisely match demand.

Other chillers use a basic all-on or all-off method for water-loop temperature control, continuously starting and stopping which greatly changes the load on the generator. By precisely balancing output to load, the swing (hysteresis) in loop water temperature is minimized. The VARC48 uses a precision PID (proportional integral derivative) loop control algorithm that modulates the compressor speed and balances chiller output with required load. This smooth operation eliminates large swings in current on the generator.

The VARC48 uses the advanced technology of an Electronic Expansion Valve (EEV). This provides more precise control of superheat across a broad range of conditions with no erratic swings as the valve reacts to temperature and pressure changes (no "hunting"). Using an advanced algorithm, superior superheat control is maintained over extreme operating conditions.

The innovative design of plumbing connections improves ease of installation and maintenance. All connections come straight out of the unit to simplify the manifold and minimize the final installation depth while also presenting clean and professional plumbing connections. The water connections are all parallel, but no two are in the same horizontal or vertical plane, which make the manifold very simple. Whether horizontal or vertical, the manifolds can be in the same plane and need not cross.

An optional high-resolution color touchscreen provides a dynamic interface and improved system metrics and control. Access detailed, complex system information from a single location and interact accordingly.



Built-in variable frequency drive.



Integrated digital chiller control/display.



Electronic expansion valve for precise control of superheat.

Key Benefits

- Variable capacity from 1 to 4 tons as thermal load changes
- Compact footprint
- Operates steadily at lower speeds to provide maximum efficiency
- Select from 3 user-adjustable amp limits: Econo, Standard, or Boost
- Electronic expansion valve for precise control of superheat
- Easy, flexible plumbing configurations with less depth needed

Special Options


- High-resolution, interactive touchscreen display
- Dometic STIIC software provides interactive management via smart phone, tablet, or computer
- Dometic STIIC software provides secure access from Dometic global technical support

Specifications for Variable Capacity Chiller

Model	VARC48
Capacity (BTU/h)	48,000
Voltage/Cycle/Ph	208-230V/50 or 60Hz/1 Ph
Full Load Amps (FLA) Cool ⁽¹⁾	15.9
Full Load Amps (FLA) Heat ⁽¹⁾	17.0
Seawater Connection	7/8 in OD tube
Chilled Water Connection	1 in. NPT
Drain Connection	1/2 in. NPT
Seawater Pressure Drop @ 12 GPM	6.5 PSI
Chilled Water Pressure Drop @ 12 GPM	11.8 PSI
Height (in/mm) ⁽²⁾	19.7/501
Max. Width (in/mm) ⁽²⁾	13.5/343
Width-Drain Pan (in/mm) ⁽²⁾	13.0/330
Max. Depth (in/mm) ⁽²⁾	20.0/509
Depth-Drain Pan (in/mm) ⁽²⁾	18.2/462
Gross Weight (lbs/kg)	178/80.7

¹ At full speed and 230V/50 or 60Hz/1-phase input power.
² All dimensions ± 0.25 in. (6 mm).

Dimensions

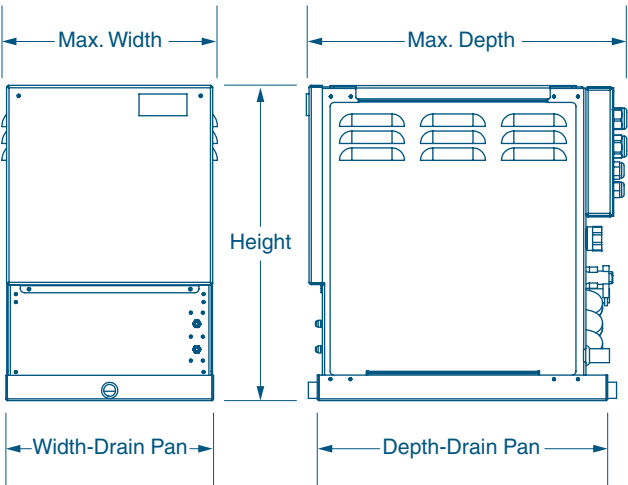

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3372 Rev. 20150410 Specifications and availability subject to change without notice.

Dealer



CHCG Series Compact Modular Chillers

Compact Modules In An Enclosed Design



CHCG20Z shown with the electrical box mounted to the top (standard).

Marine Air's Chiller Compact series is ideal for larger boats in the 45-70 ft. (15-20 m) range. Available in capacities of 16,000 and 20,000 BTU/hr, the Chiller Compact uses circulated water in a closed loop in place of copper refrigerant tubes. The innovative, space-saving compact base of the Chiller Compact was designed to allow individual modules to be multiplexed to provide precise capacity requirements for any application.

The new CHCG series is engineered to maximize the impressive performance of R-410A, a proven and environmentally safe refrigerant. CHCG chillers feature the same footprint as the older-style CHCs, and the chilled water, seawater, and drain connection locations are also the same, making it an ideal "drop-in" replacement.

Featuring high-efficiency components that offer maximum performance, Chiller Compact units have hermetically sealed compressors and custom-fabricated condenser coils constructed of spiral-fluted cupronickel for maximum heat transfer and high corrosion resistance.

The improved sensor location provides better sensor response time. This makes the safeties and the operational controls more responsive and effective while still leaving space for all water connections to be double-hose clamped.

Additional improvements include no interior foam to facilitate easier servicability, and performance and efficiency is equal to or better than older style CHCs. The optional SmartStart™ soft starter can be included in the electrical box to reduce compressor in-rush current.

The electrical box comes installed on top of the unit. However, it has a short harness and hardware allowing the installer to easily move it to the rear of the unit if desired.



The electrical box can be mounted on the rear of the unit for better installation flexibility.



Extended drain pan collects and removes condensate that drips from water connections.



The electrical box has space for the optional SmartStart soft starter.

Key Benefits

- Compact footprint for installation flexibility
- Single modules can produce up to 20,000 BTU/hr; 24,000 BTU/hr models coming soon
- Up to six modules can be multiplexed for larger capacities
- Thermodynamically-matched components assure maximum performance
- High-efficiency rotary or scroll compressors
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- Spiral-fluted cupronickel condenser coil provides maximum heat transfer and corrosion resistance
- Includes hot-gas bypass for heat mode operation in water temperatures as low as 40°F
- Digital Diagnostic Controller (DDC) monitors and protects the system
- Charged, tested, and leak checked at the factory
- Meets or exceeds applicable ABYC and US Coast Guard regulations, CE directives, and general Air Conditioning and Refrigeration (ARI) standards
- Charge Guard protection provides sealed access ports, ensuring environmental protection and chiller module integrity

Special Options


- SmartStart™ soft starter reduces compressor start-up amps by 65%

Specifications for CHCG Series Compact Modular Chillers

Model	CHCG16			CHCG20		CHCG24			
Capacity (BTU/h)	16000			20000		24000			
Voltage (V)	115	230	220	230	220	380	230		220
Cycle (Hz)/Phase (Ph)	60/1		50/1	60/1	50/1	50/3	60/3	60/1	50/1
Full Load Amps (FLA) Cool (A)	9.7	4.9	4.6	5.8	6.2	3.9	8.5	9.5	8.2
Full Load Amps (FLA) Heat (A)	14	5.8	5.9	7.9	8.7	4.6	9.9	12.1	11
Locked Rotor Amps (LRA) (A)	62	34	26	44	39	45	95	68	58
Max. Circuit Breaker (A)	40	15		20	35	20	45	40	
Min. Circuit Ampacity (A)	23	11	12	14	22	13	25		23
Refrigerant Type	410A			410A		410A			
Max. Height (in/mm) ⁽¹⁾	13/331	13.25/318	13/331	13.75/415	14.5/356	16.38/417		16.5/420	14.5/369
Max. Width (in/mm) ⁽²⁾⁽³⁾	21.3/542			21.3/542		21.3/542			
Width-Drain Pan (in/mm)	18/458			18/458		18/458			
Max. Depth (in/mm) ⁽²⁾⁽²⁾	11.5/293			13/331		13/331			
Drain Connection Size (in/mm)	½ /13			½ /13		½ /13			
Drain Connection Type	HB			HB		HB			
Seawater Flow (gpm/lpm)	4/15.2			5/18.1		6/22.8			
Seawater Pressure Drop (PSI/kPa)	1.6/11.1			3.6/24.9	3.2/22.1	4.6/31.8			
Seawater Inlet Connection (in/mm)	⅝ /16			⅝ /16		⅝ /16			
Chilled Water Flow (gpm/lpm)	4/15.2			5/18.1		6/22.8			
Chilled Water Pressure Drop (PSI/kPa)	2/13.8			3.6/24.9	3.2/22.1	7.4/51.1			
Chilled Water Connection Size (in/mm)	⅝ /16			⅝ /16		⅝ /16			
Net Weight (lbs/kg)	53.5/24.3	55.6/25.3	55/25	71.3/32.4	74.4/33.8	108.5/49.3	107.9/49	92.5/42	92.9/42.2
Gross Weight (lbs/kg)	74/33.6	75.5/34.3	75/34.1	91.25/41.4	95/43.1	130/59		115/52.2	
Estimated Availability	Now			Now		Q1 2016		Now	Q3 2015

¹ All dimensions ± 0.25 in. (6 mm).
² Width when the electrical box is mounted to the side of the unit.

Dimensions

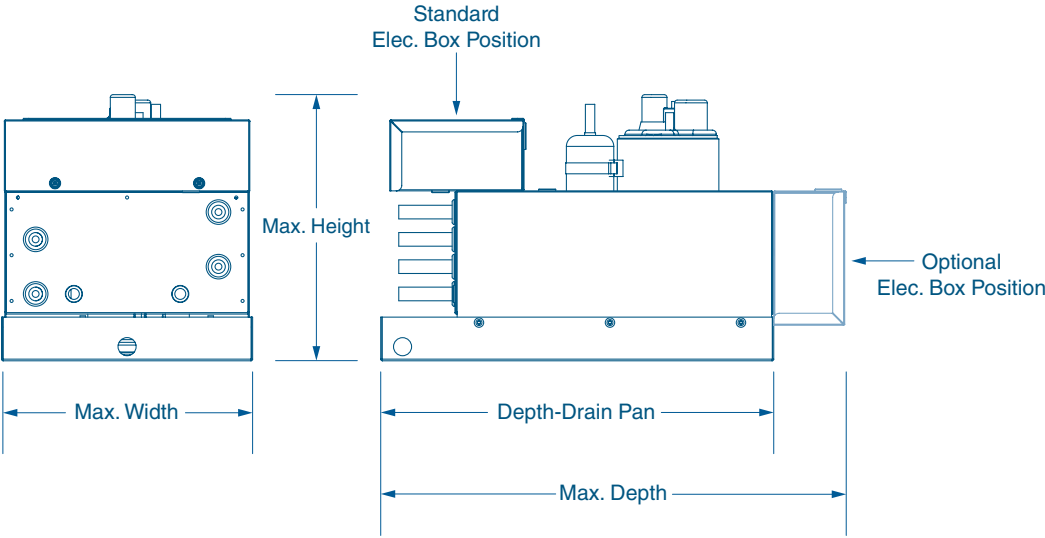

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3263 Rev. 20150206 Specifications and availability subject to change without notice.

Dealer



MCG Low-Profile Series Modular Chillers

Space-Saving Chiller Design



Marine Air MCG Low-Profile Chillers are designed for locations onboard where height is an obstacle. At a height of only 18.25 in. (464 mm) for 3- to 6-ton models and 25.2 in. (640 mm) for 12.5- and 15-ton models, MCGLP units are much shorter than other chillers in the same capacity range, but no shorter on performance and reliability.

MCGLP chillers provide reverse-cycle cooling and heating and are available in capacities from 36,000 to 180,000 BTU/hr (3 to 15 tons). Individual modules can be staged for larger capacities. The MCGLP series uses R-410A environmentally safe refrigerant, which has exceptional thermodynamic properties and maximizes system efficiency.

Performance and reliability are further improved with up to 25 percent more condenser area than similar low-profile units, and an expansion valve that modulates the refrigerant.

The MCGLP series has stainless-steel drain pans for 3- to 6-ton modules, and lightweight painted aluminum drain pans for 12.5- to 15-ton modules. All models have removable PVC water headers that resist corrosion and erosion.

MCGLP chillers are monitored and protected by Marine Air's exclusive Digital Diagnostic Controller (DDC), which can be installed remotely. For staged systems, the Chilled Water Master Controller (CWMC) provides central control over each DDC on each module in the system. Up to six modules are supported. The CWMC coordinates all cooling and heating functions, evenly distributes compressor run times, and operates the seawater and circulated water pumps.



MCG low-profile modules are available in capacities up to 15-tons and can be staged for higher capacities.

Key Benefits


- Fits into height-restrictive spaces
- Reverse-cycle heating
- Stainless-steel drain pan on 36,000 - 72,000 BTU/hr models
- Lightweight painted aluminum drain pan on 150,000 - 180,000 BTU/hr models
- Up to six modules can be multiplexed for larger capacities
- Up to 25% more condenser area than similar units
- Spiral-fluted cupronickel condenser coil provides maximum heat transfer and corrosion resistance
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Removable PVC water headers resist corrosion and erosion
- Expansion valve modulates refrigerant for improved performance
- Hot-gas bypass to provide heating in cold seawater conditions (36,000 - 72,000 BTU/hr models)
- Charged, tested, and leak checked at the factory
- Meets or exceeds all applicable standards and regulation
- Charge Guard protection provides sealed access ports, ensuring environmental protection and chiller module integrity

Specifications for MCG Low-Profile Series Modular Chillers

Model ⁽¹⁾	MCGVLP36				MCGVLP48				MCGVLP60				MCGVLP72				MCGVLP150				MCGVLP180				
Capacity (BTU/h)	36000				48000				60000				72000				150000				180000				
Voltage (V)	230	220	230	460	230	220	230	380	460	230	220	230	380	460	230	220	230	380	460	230	380	460	230	380	460
Cycle (Hz)/Phase (Ph)	60/1	50/1	60/3	60/3	60/1	50/1	60/3	50/3	60/3	60/1	50/1	60/3	50/3	60/3	60/1	50/1	60/3	50/3	60/3	60/3	50/3	60/3	50/3	60/3	
Full Load Amps (FLA) Cool (A)	12.9	12.3	8.3	3.9	13.8	14.7	11.3	5.8	5.2	17.8	22.2	11.3	8.3	5.9	20.1	14.2	10.1	7.1	30.6	19.9	15.1	38.3	24.1	20.2	
Full Load Amps (FLA) Heat (A)	16.8	18	10.9	5	20.2	21.4	12.7	7.6	6.6	23	29.1	14.8	10.8	7.4	29.3	17.9	13.3	8.9	38.9	24.5	19.3	50	29.9	25	
Locked Rotor Amps (LRA) (A)	105	102.5	95	45	150	130	120	70	60	145	130	123	87	70	145	160	100	87	304	197	147	351	239	197	
Max. Circuit Breaker (A)	70	75	50	23	80	90	58	33	30	100	101	60	42	33	94	81	42	144	86	67	168	114	86		
Min. Circuit Ampacity (A)	43	41	27	12	48	50	33	19	17	57	57	34	24	19	53	45	24	80	49	38	94	64	49		
Refrigerant type	R410A				R410A				R410A				R410A				R410A				R410A				
Max. Height (in/mm) ⁽²⁾	18.25/464				18.25/464				18.25/464				18.25/464				25.2/641				25.2/641				
Width-Drain Pan (in/mm) ⁽²⁾	12/305				12/305				12/305				12/305				20.13/512				20.13/512				
Max. Width (in/mm) ⁽²⁾	12.69/323				12.69/323				12.69/323				12.69/323				21.5/547				21.5/547				
Depth-Drain Pan (in/mm) ⁽²⁾	24/610				24/610				24/610				24/610				36.75/934				36.75/934				
Max. Depth (in/mm) ⁽²⁾	25.38/645				25.38/645				25.38/645				25.38/645				40.03/1017				40.03/1017				
Seawater Inlet Connection (in/mm)	1/26				1/26				1/26				1/26				2/51				2/51				
Chilled Water Connection	1				1				1 1/4				1 1/4				2				2				
Size (in)																									
Height-Electrical Box (in/mm)	11/280				11/280				11/280				11/280				13.3/338				13.3/338				
Width-Electrical Box (in/mm)	9.8/249				9.8/249				9.8/249				9.8/249				12/305				12/305				
Depth-Electrical Box (in/mm)	3.7/94				3.7/94				3.7/94				3.7/94				4.3/110				4.3/110				

¹ For information about net weight and shipping weight please contact a Dometic Marine sales representative at 954-973-2477.
² All dimensions ± 0.30 in. (8 mm).

Dimensions

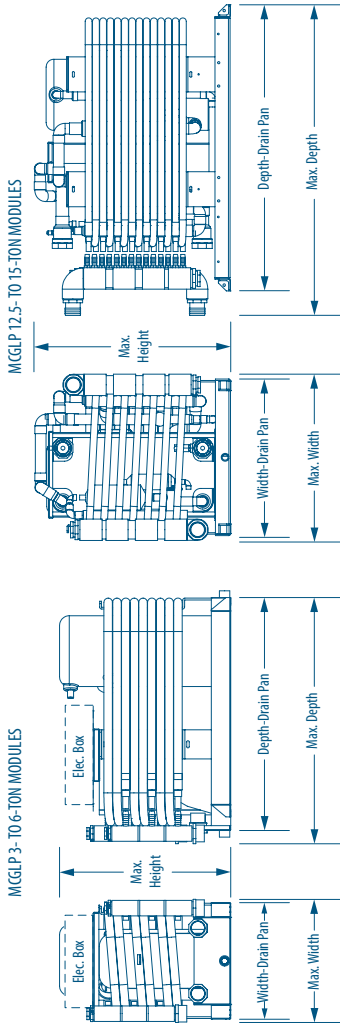

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2735 Rev. 20130419

Specifications and availability subject to change without notice.

Dealer



MCG Series 24K-72K Modular Chillers

The Standard In Chilled Water Marine Air Conditioning



Marine Air's MCG chilled water series is available in capacities ranging from 24,000 (2 ton) to 180,000 (15 ton) BTU/hr. Featuring a compact base design, MCG modules can be staged to provide a larger system, which is easily retrofitted and serviced in the field. Up to six 15-ton stages can be configured for a system total of 1,080,000 BTU/hr, or 90 tons.

Each refrigerant circuit is hermetically sealed and factory pre-charged with R-410A refrigerant. This environmentally safe refrigerant has exceptional thermodynamic properties and maximizes system efficiency.

Each condensing unit is monitored and protected with freeze controls, high-limit switches, high and low aquastats, and timers. These condensing units can be installed in any convenient location and are unaffected by vibration, moisture or ambient temperatures up to 140°F/60°C.

MCG chillers are monitored and protected by Marine Air's exclusive Digital Diagnostic Controller (DDC), which can be installed remotely. For staged systems, the Chilled Water Master Controller (CWMC) provides central control over each DDC on each module in the system. Up to six modules are supported. The CWMC coordinates all cooling and heating functions, evenly distributes compressor run times, and operates the seawater and circulated water pumps.

MCGs are available in single phase or three phase, 50Hz or 60Hz, and all standard voltages (208, 230, 380, 460 VAC).

Key Benefits

- Compact footprint for installation flexibility
- Aluminum construction is corrosion resistant and lightweight
- Up to six modules can be multiplexed for larger capacities
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Bi-flow expansion valves balance the system between heat and cool modes
- Compact stainless-steel brazed plate heat exchangers for maximum efficiency
- Spiral-fluted cupronickel condenser coil provides maximum heat transfer and corrosion resistance
- Digital Diagnostic Controller (DDC) monitors and protects the system
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- Charged, tested, and leak checked at the factory
- Meets or exceeds all applicable standards and regulation
- Charge Guard protection provides sealed access ports, ensuring environmental protection and chiller module integrity

Specifications for MCG Series 24K-72K Modular Chillers

Model ⁽¹⁾	MCGV24			MCGV36			MCGV48			MCGV60			MCGV72		
Capacity (BTU/h)	24000			36000			48000			60000			72000		
Voltage (V)	230	220	230	380	460	230	460	230	380	460	230	460	230	380	460
Cycle (Hz/Phase (Ph))	60/1	50/1	60/3	50/3	60/3	60/1	50/3	60/3	50/3	60/3	60/1	50/3	60/3	50/3	60/3
Full Load Amps (FLA) Cool (A)	6.4	9.6	5.5	3.5	2.7	12	12.3	8.3	5.1	3.9	17.8	22.2	11.3	8.3	5.9
Full Load Amps (FLA) Heat (A)	9.5	11.9	7.3	4.6	3.6	15.7	18	10.9	6.6	5	21.4	20.2	14	7.6	6.6
Locked Rotor Amps (LRA) (A)	58.3	97	58	45	28	105	115	95	50	45	130	150	120	70	60
Max. Circuit Breaker (A)	45		29	20	18	70	75	50	27	23	90	80	50	33	30
Min. Circuit Ampacity (A)	25	28	17	13	10	43	41	27	15	12	50	48	33	19	17
Refrigerant Type	R410A			R410A			R410A			R410A			R410A		
Height-Without Elec. Box (in/mm) ⁽²⁾	17.22/438			23.57/599			23.57/599			23.44/596			23.44/596		
Height-With Elec. Box (in/mm) ⁽²⁾	21.74/553			23.57/599			23.57/599			26.08/663			26.08/663		
Width-Drain Pan (in/mm)	12/305			12/305			12/305			12/305			12/305		
Max. Width (in/mm) ⁽²⁾⁽²⁾	12/305			12.5/318			12.5/318			13.25/337			13.25/337		
Depth-Drain Pan (in/mm) ⁽²⁾⁽²⁾	24/610			24/610			24/610			24/610			24/610		
Max. Depth (in/mm) ⁽²⁾	24.97/635			30.78/782			30.78/782			30.7/780			30.04/764		
Seawater Inlet Connection (in/mm)	5/8 /16			1/26			1/26			1/26			1/26		
Chilled Water Connection	1			1			1			1			1		
Size (in)	11/280			11/280			11/280			11/280			11/280		
Height-Electrical Box (in/mm) ⁽³⁾	9.8/249			9.8/249			9.8/249			9.8/249			9.8/249		
Width-Electrical Box (in/mm)	3.7/94			3.7/94			3.7/94			3.7/94			3.7/94		
Depth-Electrical Box (in/mm)															

¹ For information about net weight and shipping weight please contact a Dometic Marine sales representative at 954-973-2477.

² All dimensions ± 0.30 in. (8 mm).


³ The electrical box (DDC) for single chiller modules can be mounted remotely.

Dimensions for Multi-Stage Systems

No. of Stages	Height-Base (in/mm)	Width-Base (in/mm)	Depth-Base (in/mm)	Height-CWMC ⁽¹⁾ (in/mm)	Width-CWMC ⁽¹⁾ (in/mm)	Depth-CWMC ⁽¹⁾ (in/mm)
MCG24 to MCG72 Modules						
2	1.50/38	41.5/1054	31.0/787	24.0/610	22.0/559	7.75/199
3	1.50/38	41.5/1054	31.0/787	24.0/610	22.0/559	7.75/199
4	1.50/38	55.5/1410	31.0/787	24.0/610	30.0/762	7.75/199
5	1.50/38	69.5/1765	31.0/787	24.0/610	35.0/889	7.75/199

¹ Indicates dimensions of Chilled Water Master Controller for Marine Air multi-stage chillers. Please refer to L-2133 for additional information.

Dimensions

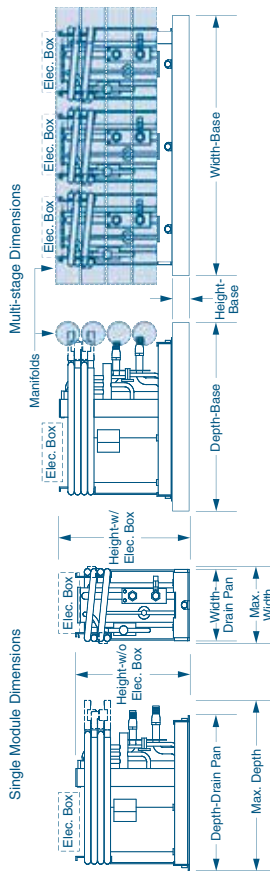

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2734A Rev. 20140228

Specifications and availability subject to change without notice.

Dealer



MCG Series 90K-180K Modular Chillers

The Standard In Chilled Water Marine Air Conditioning



Marine Air's MCG chilled water series is available in capacities ranging from 24,000 (2 ton) to 180,000 (15 ton) BTU/hr. Featuring a compact base design, MCG modules can be staged to provide a larger system, which is easily retrofitted and serviced in the field. Up to six 15-ton stages can be configured for a system total of 1,080,000 BTU/hr, or 90 tons.

Each refrigerant circuit is hermetically sealed and factory pre-charged with R-410A refrigerant. This environmentally safe refrigerant has exceptional thermodynamic properties and maximizes system efficiency.

Each condensing unit is monitored and protected with freeze controls, high-limit switches, high and low aquastats, and timers. These condensing units can be installed in any convenient location and are unaffected by vibration, moisture or ambient temperatures up to 140°F/60°C.

MCG chillers are monitored and protected by Marine Air's exclusive Digital Diagnostic Controller (DDC), which can be installed remotely. For staged systems, the Chilled Water Master Controller (CWMC) provides central control over each DDC on each module in the system. Up to six modules are supported. The CWMC coordinates all cooling and heating functions, evenly distributes compressor run times, and operates the seawater and circulated water pumps.

MCGs are available in single phase or three phase, 50Hz or 60Hz, and all standard voltages (208, 230, 380, 460 VAC).

Key Benefits

- Compact footprint for installation flexibility
- Aluminum construction is corrosion resistant and lightweight
- Up to six modules can be multiplexed for larger capacities
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Bi-flow expansion valves balance the system between heat and cool modes
- Compact stainless-steel brazed plate heat exchangers for maximum efficiency
- Spiral-fluted cupronickel condenser coil provides maximum heat transfer and corrosion resistance
- Digital Diagnostic Controller (DDC) monitors and protects the system
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- Charged, tested, and leak checked at the factory
- Meets or exceeds all applicable standards and regulation
- Charge Guard protection provides sealed access ports, ensuring environmental protection and chiller module integrity

Specifications for MCG Series 90K-180K Modular Chillers

Model ⁽¹⁾	MCGV90			MCGV120		MCGV150			MCGV180		
Capacity (BTU/h)	90000			120000		150000			180000		
Voltage (V)	230	380	460	230	380	230	380	460	230	380	460
Cycle (Hz)/Phase (Ph)	60/3	50/3	60/3	60/3	50/3	60/3	50/3	60/3	60/3	50/3	60/3
Full Load Amps (FLA) Cool (A)	22.3	14.7	9.2	25.3	15.4	30.6	19.9	15.1	38.3	24.1	20.2
Full Load Amps (FLA) Heat (A)	31.5	14.9	13.4	31.3	19.2	38.9	24.5	19.3	50	29.9	25
Locked Rotor Amps (LRA) (A)	235	110		267	147	304	197	147	351	239	197
Max. Circuit Breaker (A)	100	56	42	103	60	144	86	67	168	55	86
Min. Circuit Ampacity (A)	57	32	24	58	38	80	49	38	94	55	49
Refrigerant Type	R410A			R410A		R410A			R410A		
Height-Without Elec. Box (in/mm) ⁽²⁾	27.66/703			33.61/854		46.24/1175			49.5/1258		
Height-With Elec. Box (in/mm) ⁽²⁾	31.07/790			37.71/958		N/A			N/A		
Width-Drain Pan (in/mm)	16/407			16/407		18.63/474			18.63/474		
Max. Width (in/mm) ⁽²⁾	17.37/442			17.4/442		19.5/496			19.5/496		
Depth-Drain Pan (in/mm) ⁽²⁾	24/610			24/610		26.75/680			26.75/680		
Max. Depth (in/mm) ⁽²⁾	30.84/784			30.84/784		31.88/810			31.88/810		
Seawater Inlet Connection (in/mm)	1½ /39			1½ /39		2 /51			2 /51		
Chilled Water Connection Size (in)	1½			1½		2			2		
Height-Electrical Box (in/mm) ⁽²⁾	13.3/338			13.3/338		N/A			N/A		13.3/338
Width-Electrical Box (in/mm)	12/305			12/305		N/A			N/A		12/305
Depth-Electrical Box (in/mm)	4.3/110			4.3/110		N/A			N/A		4.3/110


¹ For information about net weight and shipping weight please contact a Dometic Marine sales representative at 954-973-2477.
² All dimensions ± 0.30 in. (8 mm).

Dimensions for Multi-Stage Systems

No. of Stages	Height-Base (in/mm)	Width-Base (in/mm)	Depth-Base (in/mm)	Height-CWMC ⁽¹⁾ (in/mm)	Width-CWMC ⁽¹⁾ (in/mm)	Depth-CWMC ⁽¹⁾ (in/mm)
MCG90 to MCG120 Modules						
2	3.0/76	36.0/914	35.5/902	24.0/610	22.0/559	7.75/199
3	3.0/76	53.5/1359	35.5/902	24.0/610	22.0/559	7.75/199
4	3.0/76	72.5/1816	35.5/902	24.0/610	30.0/762	7.75/199
5	3.0/76	88.5/2248	35.5/902	24.0/610	35.0/889	7.75/199
MCG150 to MCG180 Modules						
2	3.0/76	39.25/997	38.75/984	24.0/610	22.0/559	7.75/199
3	3.0/76	59.88/1521	38.75/984	24.0/610	22.0/559	7.75/199
4	3.0/76	80.5/2045	38.75/984	24.0/610	30.0/762	7.75/199
5	4.0/102	101.13/3569	38.75/984	24.0/610	35.0/889	7.75/199

¹ Indicates dimensions of Chilled Water Master Controller for Marine Air multi-stage chillers. Please refer to L-2133 for additional information.

Dimensions

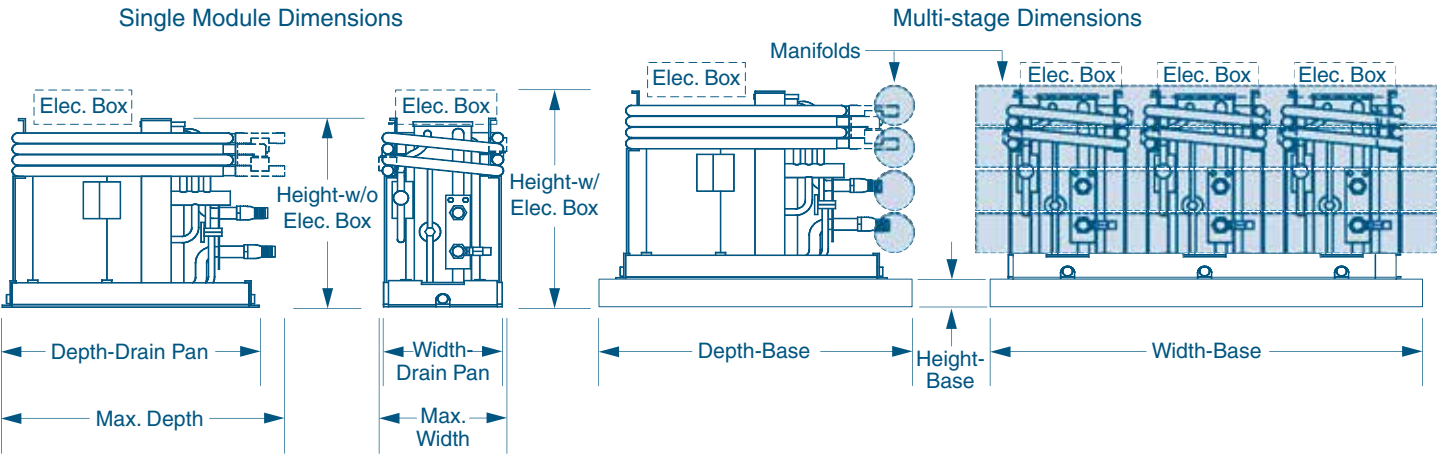

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2734B Rev. 20121130 Specifications and availability subject to change without notice.

Dealer



Staged Chilled Water (SCG) Air Conditioning

Custom High-Capacity Marine HVAC Systems



Staged Chilled Water (SCG) R-410A large-capacity systems consist of two to six modules, and are available in capacities ranging from 48,000 (4 ton) to 1,080,000 (90 ton) BTU/hr. The marine-grade compressors come in single phase or three phase, 50Hz or 60Hz, and all standard voltages (208, 230, 380, 460 VAC). Multiple compressors and refrigerant circuits are incorporated to provide minimal power consumption versus load demands, as well as redundancy throughout the unit. Each condensing unit is monitored and protected with freeze controls, high-limit switches, high and low aquastats, timers and on-board fuses or breakers.

Cupro-nickel condenser coils provide high corrosion resistance. Unique stainless-steel evaporator plates are designed for maximum efficiency of heat transfer. SCG systems can be built with the circulation pump mounted in the chiller frame. Frames are welded with marine-grade aluminum alloy, primed, then finished with a corrosion resistant epoxy.

SCG systems can provide heating in a variety of ways, depending upon the requirements. Reverse-cycle provides the most efficient heating, but requires a seawater temperature $\geq 40^{\circ}\text{F}$ (5°C). Electric heating provides adequate capacities for vessels operating in all waters, but is limited by the capability of the power source. Auxiliary heating is available through the use of heating elements installed in the air handlers. Each of these elements provides 1-3 kW of heat that can be operated independently or in combination with the central heating circuit to maintain optimal temperatures.

SCG systems can be installed in any convenient location and are highly resistant to vibration, moisture or ambient temperatures up to $140^{\circ}\text{F}/60^{\circ}\text{C}$. All access ports to the refrigerant system are protected with Charge Guard®, a factory installed seal, ensuring system integrity from shipping through final installation. Units meet or exceed Coast Guard regulations.

Key Benefits

- Two- to six-stage high-capacity systems
- Built-in redundancy - the system will continue to function in the event a circuit fails
- Spiral-fluted cupronickel condenser coil provides maximum heat transfer and corrosion resistance
- Copper-brazed stainless-steel plate heat exchangers for maximum efficiency
- Thermal expansion valves automatically adjust to changing load requirements
- Modules are protected by a circuit breaker, blow switch, freeze protection, water temperature high limit, high-pressure refrigerant switch, and low-pressure refrigerant switch
- Sturdy and lightweight aluminum frame
- Complete control circuit provides multiple fail safes for system protection
- Custom frame designs available to fit virtually any space requirement
- Available with Chilled Water Master Controller (CWMC) or Tempered Water Logic Control (TWLC) for precise operation and monitoring of the system

Electrical Specifications for Individual Compressors

Capacity ⁽¹⁾	Voltage ⁽²⁾	Cycle (Hz)/Phase	Full Load Amps (FLA) Cool	Full Load Amps (FLA) Heat	Locked Rotor Amps (LRA)
24,000 BTU/hr	208-240	60/1	6.4	10.9	58.3
	220-240	50/1	7.5	11.6	67.0
	208-230	60/3	5.5	7.3	58.0
	440-480	60/3	2.7	4.0	28.0
36,000 BTU/hr	208-240	60/1	10.9	15.6	112.0
	220-240	50/1	11.6	16.9	97.0
	208-230	60/3	7.3	9.4	88.0
	440-480	60/3	4.0	5.2	44.0
48,000 BTU/hr	208-240	60/1	13.0	19.1	135.0
	220-240	50/1	14.4	20.7	136.0
	208-230	60/3	9.1	12.2	98.0
	440-480	60/3	4.7	6.2	46.0
60,000 BTU/hr	380-420	50/3	4.9	7.0	51.5
	208-240	60/1	17.0	24.7	158.0
	220-240	50/1	21.5	30.1	176.0
	208-230	60/3	10.6	14.4	110.0
72,000 BTU/hr	440-480	60/3	6.2	8.2	75.0
	380-420	50/3	6.8	9.1	74.0
	208-240	60/1	23.3	32.5	148.0
	208-230	60/3	14.2	18.2	149.0
90,000 BTU/hr	440-480	60/3	6.9	9.1	75.0
	380-420	50/3	9.0	11.7	101.0
	208-230	60/3	19.5	24.9	195.0
	440-480	60/3	9.8	12.4	95.0
120,000 BTU/hr	380-420	50/3	10.8	13.6	111.0
	208-230	60/3	25.3	32.8	239.0
	440-480	60/3	12.7	16.4	125.0
	380-420	50/3	13.3	17.8	118.0
150,000 BTU/hr	208-230	60/3	29.5	38.0	245.0
	440-480	60/3	13.8	18.0	125.0
	380-420	50/3	21.2	26.2	173.0
	208-230	60/3	41.9	52.0	340.0
180,000 BTU/hr	440-480	60/3	21.2	26.2	173.0
	380-420	50/3	25.5	31.7	196.0

¹ Due to the number of variables, physical dimensions and weights for complete SCW and SCG systems are not listed here. Please contact Dometic Marine at 954-973-2477 to discuss your system with a sales representative.
² For more information regarding compressor voltages, please refer to field notice (FNR) #192-B3-M.

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2136 Rev. 20120824 Specifications and availability subject to change without notice.

Dealer



MTS High-Capacity Modular Chillers

With Marine-Grade Shell-and-Tube Condenser



MTS systems are high-capacity, marine-grade shell-and-tube chiller modules designed for large pleasure yachts and commercial vessels. Optional electric-immersion heating can provide on-board comfort year round.

MTS chillers have a hermetic scroll compressor and a shell-and-tube marine-grade condenser, along with other mechanical and electrical components on a single chassis. Multiple modules can be staged as needed to meet the required load. Up to six modules are supported.

MTS chillers are designed for easy installation in tight spaces. They provide easy front access for repair and maintenance of condenser tubes, heater rods, flow switch, compressor, and replaceable drier cores. Safety measures include high-pressure switch, refrigerant pressure-relief valve, low-pressure switch, flow switch, high-limit switch, and freeze protection.

A filter drier keeps refrigerant oil clean and dry for long compressor life. With 100 percent pump-down capacity, refrigerant circuit repairs can be made without recovering the refrigerant.

The MTS 25-ton (279,000 BTU/hr) chiller is available in 380V and 460V models.

Key Benefits


- Up to six modules can be multiplexed for larger capacities
- Hermetically-sealed compressor
- Marine-grade cupronickel shell-and-tube condenser
- High-pressure switch and pressure-relief valve for safety
- Dual bottom draining liquid connections for optimal performance in choppy seas
- Filter drier keeps refrigerant oil clean and dry for long compressor life
- 100% pump-down capacity for making circuit repairs without recovering the refrigerant
- Optional variable frequency drives smooth out compressor startup power demand

Specifications for MTS High-Capacity Modular Chillers

Dimensions

Model	MTS 25-Ton Modular Chiller	
Voltage (V)	380	460
Cycle (Hz)/Phase (Ph)	50/3	60/3
Max. Height (in/mm) ⁽¹⁾	61.2/1555	
Max. Width (in/mm) ⁽¹⁾⁽²⁾	19.5/496	21.75/553
Max. Depth (in/mm) ⁽¹⁾⁽³⁾	35.5/902	40.2/1022
Width Frame (in/mm) ⁽¹⁾	21.8/554	19.5/496
Depth Frame (in/mm) ⁽¹⁾	40.2/1022	35.5/902
Clearance Left (in/mm)	5/127	
Clearance Right (in/mm)	10/254	
Clearance Manifold (in/mm)	8/204	

¹ All dimensions ± 0.30 in. (8 mm).
² For staged modules, add a clearance of 5 in. (127 mm) and 10 in. (254 mm), alternately, between modules.
³ Allow 8 in. (203 mm) on water connection side for manifolds without isolation valve, and 14 in. (356 mm) for manifolds with isolation valve.

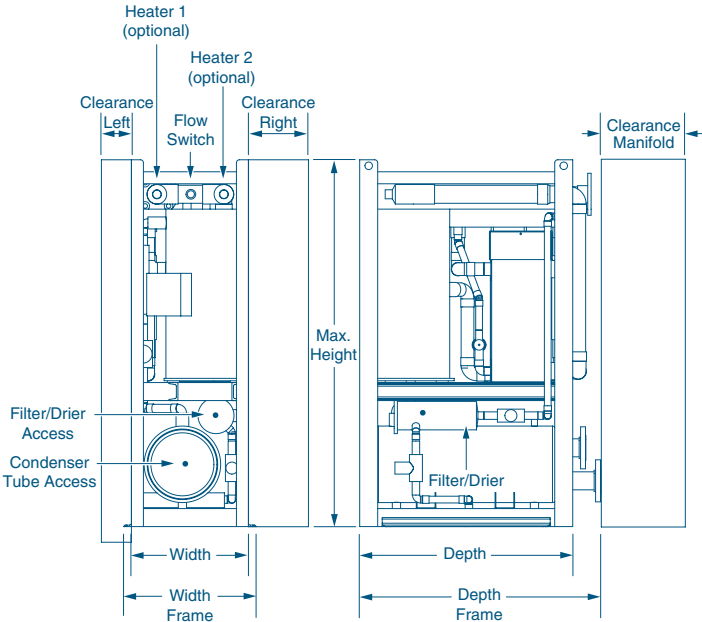

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2467 Rev. 20120824 Specifications and availability subject to change without notice.

Dealer



Gold Series (AU-HV) Air Handlers

Rust-Free, Anti-Slosh Drain Pan With Quick & Easy Installation



Completely redesigned for easier installation and improved performance, Gold Series air handlers, recipient of an Honorable Mention at the 2012 International Boatbuilders Exhibition and Conference (IBEX), incorporate many innovative features, including an optional Breathe Easy™ air purifier.

A rust-free, anti-slosh, positive-flow drain pan quickly removes condensate water and a third drain hole can be employed to further increase drainage. Each drain hole is reinforced and has an external stop to prevent over tightening of the screw-in hose barb.

To better accommodate a variety of installations, each drain hole can accept either a straight or 90-degree hose barb. In addition, the vibration-isolation mounting hardware can be attached at a variety of locations along the perimeter of the drain pan.

Gold Series AU-HV air handlers feature high-velocity (HV) blowers. The rotatable blower ring can be positioned easily by adjusting a single screw, and can even blow directly downward (best achieved with the right-oriented version). Optional DC "WhisperCool" blowers are available.

The blower inlet adapter is made of a high-temperature resin to easily withstand the heat generated by the optional internal electric heating element. Gold Series air handlers provide easy access to the manual heater-overload safety switch, which is accessible without disassembling the unit.

The optional integrated Breathe Easy air purifier is positioned directly in the airstream and uses ultraviolet (UV) light and photocatalytic nano-mesh technology to improve air quality without producing any harmful ozone. The award-winning Breathe Easy eliminates odors and up to 99.9% of VOCs and biological contaminants.



The drain pan features anti-slosh, positive-flow condensate channels, reinforced drain holes, and moveable vibration-isolation mounting clips.



The Gold air handler's HV blower can be easily rotated in the field by loosening the single adjustment screw on the blower collar (standard AU model shown).



The assembly for the optional electric heater (top) and Breathe Easy air purifier (bottom) fits between the coil and blower (standard AU model shown).

Key Benefits

- Rust-free composite drain pan
- Drain pan features anti-slosh, "positive-flow" drain channels for no spills and rapid removal of condensate
- Vibration-isolation mounts reduce noise and vibration
- Improved insulation
- Single adjustment screw for 270° of blower rotation
- Blower can be rotated to straight down position for overhead applications
- Easy access to heater overload reset button
- Flexible mounting options
- Braided, kink-proof air bleeder hose
- Reinforced drain holes prevent overtightening of hose barbs

Special Options

- Optional EU package upgrades include improved insulation and wire loom, protective cover for water-tube hairpins, and more (see reverse side for details)
- Optional DC "WhisperCool" blowers are extremely quiet yet powerful enough to overcome high-static-pressure duct
- Optional integrated Breathe Easy™ air purifier stops odors and is up to 99.9% effective in neutralizing contaminants in the air you breathe (not available for 6K BTU models)
- Optional electric heat
- Optional flow control automatically balances circulated water throughout the system
- Optional Breathe Easy™ microparticle air filter
- Left-oriented blower models

Specifications for Gold Series (AU-HV) Air Handlers

Model ⁽¹⁾	AU6HV		AU9HV		AU12HV		AU18HV		AU24HV	
Nominal Capacity - Cool (BTU/h)	6000		9000		12000		18000		24000	
Voltage @ 50/60Hz 1-Ph (V)	230	115	230	115	230	115	115	230	230	115
Full Load Amps (FLA) Cool (A)	0.83	1.56	0.61	1.14	0.78	1.61	2.52	1.18	1.64	3.4
Full Load Amps (FLA) Heat (A)	5.18	10.26	4.96	9.84	7.3	14.65	28.61	14.22	14.68	29.49
Optional Electric Heat (kW)	1		1.5		1.5		3		3	
Max. Circuit Breaker (A)	10	15	10	15	10	20	30	15	20	35
Min. Circuit Ampacity (A)	6	11	6	11	8	16	30	15	16	31
Water Flow (gpm/lpm)	1.5/5.7		2.3/8.8		3/11.4		4.5/17.1		6/22.8	
Air Flow (cfm/m ³ h)	229/390		278/473		338/575		465/791		506/860	
External Static Pressure	0.3/74.7		0.3/74.7		0.3/74.7		0.3/74.7		0.3/74.7	
Chilled Water Pressure Drop (PSI)	1.1		4.4		8		4.6		11	
Min. Height (in/mm)	11.19/285		13.31/339		13.31/339		13.94/355		15.25/388	
Max. Height (in/mm) ⁽²⁾	12.13/309		13.31/339		13.38/340		15.38/391		16.75/426	
Max. Width (in/mm) ⁽²⁾	14.5/369		16.5/420		16.5/420		20.13/512		22.63/575	
Max. Depth (in/mm) ⁽²⁾	12.56/320		13.25/337		14.25/362		15/381		15.38/391	
Chilled Water Connection Size (in)	1/2		1/2		1/2		1/2		1/2	
Min. Supply Duct Size (in/mm)	5/127		6/153		6/153		7/178		8/204	
Min. Supply Air Grille Size (sq in/sq cm)	35/226		49/317		70/452		100/646		140/904	
Min. Return Air Grille Size (sq in/sq cm)	70/452		98/633		130/839		200/1291		240/1549	

¹ Model numbers shown are for 115V units with high-velocity (HV) blowers. Add a 'Z' for 230V units; add '-FC' for optional flow control; add '-L' or '-R' for valve position (relative to the coil) and angle of the blower; add '-kW' for amount of optional electric heat in kilowatts (for ex. 1.5kW). See DWG H3050002 for a visual explanation of valve orientation and blower angle.

² All dimensions ± 0.30 in. (8 mm).

About the EU Package

The EU Package includes several upgrades for reduced installation time and an improved appearance.

A plastic cover (A) protects the exposed water-tube hairpins. An upgraded wire loom (B) is used for better aesthetics and all electrical connections use quick plugs (C) so there are no wires to connect. A new durable bleeder assembly with cradle (D) gives easy access and speeds the air bleeding process.


A capacitor, protected under a plastic housing (E), replaces the electrical box. In addition, a slave box can be used to control multiple air handlers from a single cabing control, all with plug-in connections. The plumbing connections (F) are shorter so the installation takes up less space.



Key Benefits

- Quick-plug electrical connections
- Upgraded wire loom for improved appearance
- Less space needed for plumbing connections
- Easy access to bleeder assembly

Dimensions

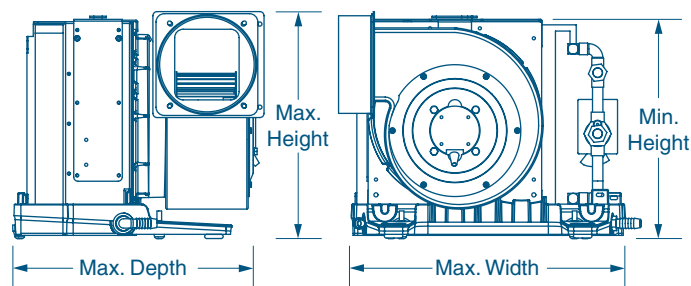

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



NEW

Gold Series (AU-DC) Air Handlers

Rust-Free, Anti-Slosh Drain Pan With Quick & Easy Installation



Gold AU12DCZ 12,000 BTU/hr 230V/50-60Hz chilled water air handler shown

Gold Series air handlers, recipient of an Honorable Mention at the 2012 International Boatbuilders Exhibition and Conference (IBEX), incorporate many innovative features, including an optional Breathe Easy™ air purifier and rust-free composite drain pan. AU-DC models feature ultra-quiet "WhisperCool" DC blowers that are strong enough to overcome high-static-pressure duct.

The composite drain pan quickly removes condensate water. Each drain hole is reinforced and has an external stop to prevent over tightening of the screw-in hose barb. Straight or 90-degree hose barbs may be used to better accommodate a variety of installation situations. Vibration-isolation mounting hardware can be attached at a variety of locations along the perimeter of the drain pan.

The rotatable blower ring can be positioned easily in the field by adjusting a single screw, and can even blow directly downward (best achieved with the right-oriented version). The blower inlet adapter is made of a high-temperature resin to easily withstand the heat generated by the optional internal electric heating element. The manual heater-overload safety switch is easily accessible without disassembling the unit.

The optional integrated Breathe Easy air purifier is positioned directly in the airstream. Our award-winning Breathe Easy technology eliminates odors and up to 99.9% of VOCs and biological contaminants.


An upgraded Gold series EU package is available. Please see reverse side for details.



The drain pan features anti-slosh, positive-flow condensate channels, reinforced drain holes, and moveable vibration-isolation mounting clips.



The DC blower can be easily rotated in the field by loosening the single adjustment screw (A) on the blower collar; air bleeder hose cradle (B) is also shown.



The assembly for the optional electric heater (top) and Breathe Easy air purifier (bottom) fits between the coil and blower (standard AU model shown).

Key Benefits

- Rust-free composite drain pan
- Drain pan features anti-slosh, "positive-flow" drain channels for no spills and rapid removal of condensate
- Vibration-isolation mounts reduce noise and vibration
- Improved insulation
- DC "WhisperCool" blowers are extremely quiet yet powerful enough to overcome high-static-pressure duct
- Single adjustment screw for 270° of blower rotation
- Blower can be rotated to straight down position for overhead applications
- Easy access to heater overload reset button
- Flexible mounting options
- Braided, kink-proof air bleeder hose
- Reinforced drain holes prevent overtightening of hose barbs

Special Options

- Optional EU package upgrades include improved insulation and wire loom, protective cover for water-tube hairpins, and more (see reverse side for details)
- Optional integrated Breathe Easy™ air purifier stops odors and is up to 99.9% effective in neutralizing contaminants in the air you breathe
- Optional electric heat
- Optional flow control automatically balances circulated water throughout the system
- Optional Breathe Easy™ microparticle air filter
- Left-oriented blower models

Specifications for Gold Series (AU-DC) Air Handlers

Model ⁽¹⁾	AU6DC	AU9DC	AU12DC	AU18DC	AU24DC
Nominal Capacity - Cool (BTU/h)	6000	9000	12000	18000	24000
Voltage @ 50/60Hz 1-Ph (V)	230	230	230	230	230
Full Load Amps (FLA) Cool (A)	1.4	1.4	3.17	3.9	3.86
Full Load Amps (FLA) Heat (A)	5.75	7.92	9.69	17	16.9
Full Load Amps (FLA) Blower (A)	1.4	1.4	3.2	3.9	3.9
Optional Electric Heat (kW)	1	1	1.5	3	3
Max. Circuit Breaker (A)	10	10	15	20	20
Min. Circuit Ampacity (A)	7	9	11	18	18
Water Flow (gpm/lpm)	1.5/5.7	2.25/8.6	3/11.4	4.5/17.1	6/22.8
Air Flow (cfm/m ³ h)	200/340	300/510	400/680	600/1020	700/1190
External Static Pressure	2.9/722.1	2.8/697.2	2.6/647.4	2.1/522.9	1.4/348.6
Chilled Water Pressure Drop (PSI)	1.1	4.4	8	4.6	11
Max. Height (in/mm) ⁽²⁾	11.7/298	13.4/341	13.4/341	14.4/366	15.5/394
Max. Width (in/mm) ⁽²⁾	14.4/366	16.4/417	16.4/417	19.9/506	22.4/569
Max. Depth (in/mm) ⁽²⁾	14/356	14/356	16.7/425	17.3/440	17.3/440
Drain Connection Size (in)	½	½	½	½	½
Drain Connection Type	FPT	FPT	FPT	FPT	FPT
Chilled Water Connection Size (in)	½	½	½	½	½
Chilled Water Connection Type	FPT	FPT	FPT	FPT	FPT
Min. Supply Duct Size (in/mm)	5/127	6/153	6/153	7/178	8/204
Min. Supply Air Grille Size (sq in/sq cm)	35/226	49/317	70/452	100/646	140/904
Min. Return Air Grille Size (sq in/sq cm)	70/452	98/633	130/839	200/1291	240/1549
Net Weight (lbs/kg) ⁽³⁾	24/10.9	26.5/12.1	33.25/15.1	42/19.1	46/20.9
Gross Weight (lbs/kg)	31/14.1	35/15.9	42/19.1	54/24.5	58/26.4

¹ Model numbers shown are for 115V units with brushless "WhisperCool" (DC) blowers. Add a 'Z' for 230V units; add '-FC' for optional flow control; add '-L__' or '-R__' for valve position (relative to the coil) and angle of the blower; add '___kW' for amount of optional electric heat in kilowatts (for ex. 1.5kW). See DWG H3050002 for a visual explanation of valve orientation and blower angle.

² All dimensions ± 0.30 in. (8 mm).

³ Without electric heat option, subtract 3 lbs. (1.4 kg) from unit weight for each heater element.


About the EU Package

The EU Package includes several upgrades for reduced installation time and an improved appearance.

A plastic cover (A) protects the exposed water-tube hairpins. Electrical connections use quick plugs (B) so there are no wires to connect, and upgraded wire loom (C) is used for better aesthetics. A new durable bleeder assembly with cradle (D) gives easy access and speeds the air bleeding process.

A capacitor, protected under a plastic housing (E), replaces the electrical box. In addition, a slave box can be used to control multiple air handlers from a single cabing control, all with plug-in connections. The plumbing connections (F) are shorter so the installation takes up less space.

Dimensions

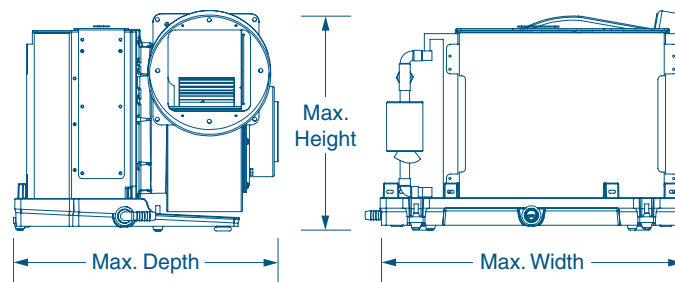

Key Benefits

- Quick-plug electrical connections
- Upgraded wire loop for improved appearance
- Less space needed for plumbing connections
- Easy access to bleeder assembly

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer

AT-HV Series Air Handlers

Compact Units With High-Velocity Blowers



The AT-HV series of air handlers for marine HVAC chilled water systems are draw-through (ducted) units with high-velocity (HV) blowers. The AT-HV series replaces Flex-Duct and Draw-Through series air handlers, and has many improvements and options over the older units.

Significant improvements include: sloped "Positive-Flow" drain pan which reduces standing water, larger drain connections, improved coil design for better cooling and dehumidifying performance, coil is offset from drain pan edge to ensure all condensation is caught in the pan, redesigned piping so the bypass valve is clear of dripping condensation, pressure test ports for troubleshooting, and the new 24,000 BTU/hr unit uses a high-efficiency, internal-motor blower for quieter operation. On units with auxiliary (electric) heat, the new heater design allows removal from the top or side for access or servicing.

All Marine Air air handlers use corrosion-resistant materials. They feature "positive-flow" drain pans with anti-slosh foam lining and are fully insulated against secondary condensation. Electric heat is optional.

AT air handlers are available with "WhisperCool" brushless DC blowers (AT-DC series).

Key Benefits

- Compact design
- High-velocity (HV) fully-insulated blowers are rotatable
- Improved cooling and dehumidification
- Drain pan has anti-slosh, anti-fungal foam lining
- Vibration-isolation mounts reduce noise and vibration.
- Exposed sheet metal is insulated against secondary condensation
- Remote air bleeder on 6 ft. (1.8 m) of flexible tubing with ball valve
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Water-pressure test ports for troubleshooting
- Allowance for connecting variable fan-speed drives
- Rotatable blowers
- Optional flow control automatically balances circulated water throughout the system
- Optional Electric Heat
- Optional Breathe Easy™ microparticle air filter

Specifications for AT-HV Series Air Handlers


Model ⁽¹⁾	AT4HV		AT6HV		AT9HV		AT12HV		AT18HV		AT24HV		AT36HV
Nominal Capacity - Cool (BTU/h)	4000		6000		9000		12000		18000		24000		36000
Nominal Capacity - Heat (BTU/h)	TBD		3412		5118		6824		10236		10236		13648
Voltage @ 50/60Hz 1-Ph (V)	115	230	115	230	115	230	115	230	115	230	230	115	230
Full Load Amps (FLA) Cool (A)	1.06	0.41	1.6	0.83	1.1	0.6	1.5	0.7	2.3	1.18	1.15	2.3	1.62
Full Load Amps (FLA) Blower (A)	0.8	0.4	1.2	0.6	1.4	0.7	1.4	0.7	2.2	1	1	2.2	1.6
Optional Electric Heat (kW)	N/A		1		1.5		2		3		3		4
Max. Circuit Breaker (A)	5		5		5		5		5		5		5
Min. Circuit Ampacity (A)	2	1	2		2	1	2	1	3	2	2	3	3
Water Flow (gpm/lpm)	1/3.8		1.5/5.7		2.3/8.8		3/11.4		4.5/17.1		6/22.8		9/34.1
Air Flow (cfm/m3h)	130/221		229/390		278/473		338/575		465/791		506/860		676/1149
External Static Pressure	0.3/74.7		0.3/74.7		0.3/74.7		0.3/74.7		0.3/74.7		0.3/74.7		0.3/74.7
Min. Height (in/mm) ⁽²⁾	9.75/248		10.25/261		12.13/309		12.05/307		15/381		15.94/405		19.75/502
Max. Height (in/mm) ⁽²⁾	9.75/248		11.25/286		13.31/339		13.88/353		15/381		15.94/405		19.75/502
Max. Width (in/mm) ⁽²⁾	15/381		15.25/388		16.88/429		18.75/477		20.38/518		22.63/575		26.63/677
Max. Depth (in/mm) ⁽²⁾⁽³⁾	10.25/261		12.38/315		12.13/309		12.38/315		13.5/343		15/381		15.81/402
Drain Connection Size (in)	½		½		½		½		½		½		½
Drain Connection Type	FPT		FPT		FPT		FPT		FPT		FPT		FPT
Chilled Water Connection Size (in)	½		½		½		½		½		½		½
Chilled Water Connection Type	FPT		FPT		FPT		FPT		FPT		FPT		FPT
Min. Supply Duct Size (in/mm)	4/102		5/127		6/153		6/153		7/178		8/204		8/204
Min. Supply Air Grille Size (sq in/sq cm)	32/207		35/226		49/317		70/452		100/646		140/904		196/1265
Min. Return Air Grille Size (sq in/sq cm)	64/413		70/452		98/633		130/839		200/1291		240/1549		360/2323
Height-Electrical Box (in/mm)	8/204		8/204		8/204		8/204		8/204		8/204		8/204
Width-Electrical Box (in/mm)	6.13/156		6.13/156		6.13/156		6.13/156		6.13/156		6.13/156		6.13/156
Depth-Electrical Box (in/mm)	2/51		2/51		2/51		2/51		2/51		2/51		2/51

¹ Model numbers shown are for 115V units with high-velocity (HV) blowers. Add a 'Z' for 230V units; add '-FC' for optional flow control; add '-L____' or '-R____' for valve position (relative to the coil) and angle of the blower; add '____kW' for amount of optional electric heat in kilowatts (for ex. 1.5kW). See DWG H3050002 for a visual explanation of valve orientation and blower angle.

² All dimensions ± 0.30 in. (8 mm).

³ Max. depth for AT36HV with flow control option. Reduce by 1.75 in. (45 mm) without flow control.

Dimensions

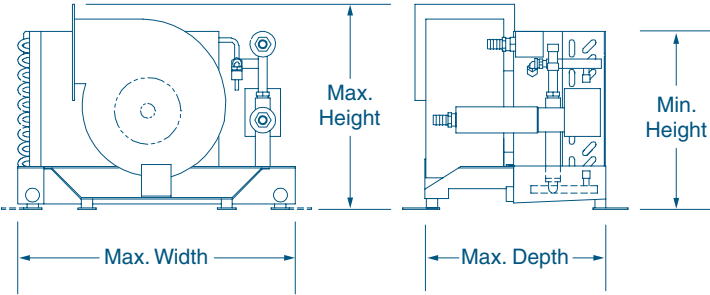

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2355 Rev. 20141010 Specifications and availability subject to change without notice.

Dealer



AT-DC Series Air Handlers

Compact Units With DC "WhisperCool" Blowers



The AT-DC series of chilled water air handlers represents the new standard in marine HVAC engineering that you'll barely notice. Thanks to "WhisperCool" technology, the AT-DC series harnesses engineering refinements to eliminate the annoying "motor hum" heard from ordinary air handlers operating at very low fan speeds. Incoming alternating current is converted to drive a brushless DC internal blower motor, resulting in super-quiet and highly-efficient performance across all fan speeds.

Additional design changes in the air handlers eliminate condensate drain problems, reduce dripping condensation and standing water issues. An improved coil enhances cooling and dehumidification performance. The redesigned unit also creates easily accessible water-pressure test points for troubleshooting and maintenance.

All Marine Air air handlers use corrosion-resistant materials. They feature "positive-flow" drain pans with anti-slosh foam lining and are fully insulated against secondary condensation. Electric heat is optional.

Key Benefits


- DC "WhisperCool" blowers are extremely quiet yet powerful enough to overcome high-static-pressure duct
- Improved cooling and dehumidification
- Drain pan has anti-slosh, anti-fungal foam lining
- Vibration-isolation mounts reduce noise and vibration.
- Exposed components are insulated against secondary condensation
- Remote air bleeder on 6 ft. (1.8 m) of flexible tubing with ball valve
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Rotatable blowers
- Optional flow control automatically balances circulated water throughout the system
- Optional Electric Heat
- Optional Breathe Easy™ microparticle air filter

Specifications for AT-DC Series Air Handlers

Model ⁽¹⁾	AT6DC	AT9DC	AT12DC	AT18DC	AT24DC	AT36DC
Nominal Capacity - Cool (BTU/h)	6000	9000	12000	18000	24000	36000
Nominal Capacity - Heat (BTU/h)	3412	3412	5118	5118	10236	10236
Voltage @ 50/60Hz 1-Ph (V)	230	230	230	230	230	230
Full Load Amps (FLA) Cool (A) ⁽²⁾	1.4	1.4	3.2	3.9	3.9	3.9
Full Load Amps (FLA) Blower (A)	1.4	1.4	3.2	3.9	3.9	3.9
Optional Electric Heat (kW)	1	1	1.5	1.5	3	3
Heater Amps (A)	4.3	4.3	6.5	6.5	13	13
Max. Circuit Breaker (A)	5	5	5	5	5	5
Min. Circuit Ampacity (A)	2	2	4	5	5	5
Water Flow (gpm/lpm)	1.5/5.7	2.25/8.6	3/11.4	4.5/17.1	6/22.8	9/34.1
Air Flow (cfm/m3h)	200/340	300/510	400/680	600/1020	700/1190	800/1360
External Static Pressure ⁽³⁾	2.9/722.1	2.8/697.2	2.6/647.4	2.1/522.9	1.4/348.6	0.5/124.5
Min. Height (in/mm) ⁽³⁾	11.08/282	11.79/300	12.05/307	14.83/377	16.7/425	16.74/426
Max. Height (in/mm) ⁽³⁾	13.63/347	13.73/349	13.94/355	16.94/431	16.7/425	19.74/502
Max. Width (in/mm) ⁽³⁾	14.81/377	16.48/419	18.75/477	20.08/511	22.48/571	26.41/671
Max. Depth (in/mm) ⁽³⁾	14.27/363	14.55/370	14.49/369	14.83/377	16.42/418	17.15/436
Drain Connection Size (in)	½	½	½	½	½	½
Drain Connection Type	FPT	FPT	FPT	FPT	FPT	FPT
Chilled Water Connection Size (in)	½	½	½	½	½	½
Chilled Water Connection Type	FPT	FPT	FPT	FPT	FPT	FPT
Min. Supply Duct Size (in/mm)	5/127	6/153	6/153	7/178	8/204	8/204
Min. Supply Air Grille Size (sq in/sq cm)	35/226	49/317	70/452	100/646	140/904	196/1265
Min. Return Air Grille Size (sq in/sq cm)	70/452	98/633	130/839	200/1291	240/1549	360/2323
Height-Electrical Box (in/mm)	8/204	8/204	8/204	8/204	8/204	8/204
Width-Electrical Box (in/mm)	6.13/156	6.13/156	6.13/156	6.13/156	6.13/156	6.13/156
Depth-Electrical Box (in/mm)	2/51	2/51	2/51	2/51	2/51	2/51

¹ 'Z' indicates 230V. Add '-FC' for optional flow control; add '-LX' or '-RX' for valve position (relative to the blower side of the coil) and angle of the blower ('-R0' is the default); add '#kW' for amount of optional electric heat in kilowatts.
² Blower amps will be reduced at lower speed/cfm or higher static pressure. Amps listed are at free air.
³ All dimensions ± 0.30 in. (8 mm).

Dimensions

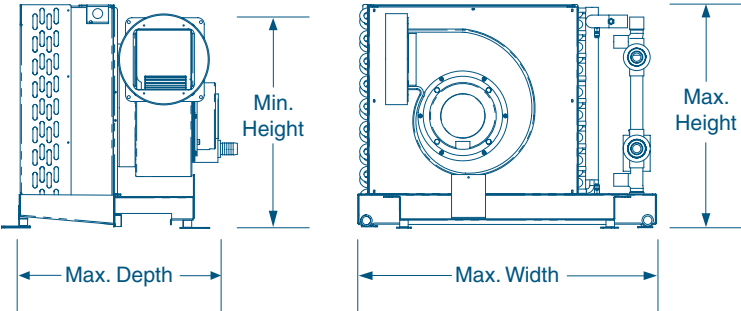

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2426A Rev. 20120824 Specifications and availability subject to change without notice.

Dealer



ATL-HV Series Low-Profile Air Handlers

Ideal for Height-Restrictive Installations; High-Velocity Blowers



The ATL-HV series of chilled water air handlers represents an improved design approach to low-profile, draw-through air handlers. These "open top" units allow easier maintenance access and reduced dimensions overall.

The top panel of ATL units can be removed for maintenance access to the blower(s). In this way, the unit can be serviced without disturbing the drain pan. The drain stems face aft (toward the blower side) to minimize footprint. Furthermore, the optional electric heaters are mounted on the blower discharge instead of inside the plenum, thereby eliminating the depth added to the plenum area for 6K-18K units.

The ATL-HV series features dual high-velocity (HV) blowers. Optional "WhisperCool" DC blowers are available. These blowers are ultra quiet yet strong enough to overcome high-static-pressure duct.

Capacities of the ATL-HV series are 6,000, 9,000, 12,000, 18,000, and 24,000 BTU/hr. A 16,000 BTU/hr unit is available (ATL16F) with dual tangential blowers. All ATL blowers are mounted horizontally for an exceptionally low profile, making these units ideal for height-restrictive installations. They can be suspended from above or supported from beneath and suspension hardware is included. Vibration-isolation mounts reduce noise and the transmission of vibrations to the installation platform.

The drain pan has an anti-slosh, anti-fungal foam lining and extends to under the valve motor and plumbing. The water connections are insulated against secondary condensation, and the valve can be mounted on the left (standard) or right (optional).

Key Benefits

- Suspend from above or support from beneath (hardware included)
- Vibration-isolation mounts reduce noise and vibration
- Bypass valve has removable power head for simple servicing
- Valve body is soldered to unit to prevent leaks
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Remote air bleeder on 6 ft. (1.8 m) of flexible tubing with ball valve
- Optional DC "WhisperCool" blowers are extremely quiet yet powerful enough to overcome high-static-pressure duct
- Valve on left (standard) or on right (optional)
- Automatic flow control helps balance chilled water distribution throughout the boat
- Optional Breathe Easy™ microparticle air filter


Specifications for ATL-HV Series Low-Profile Air Handlers

Model ⁽¹⁾	ATL6HV	ATL9HV	ATL12HV		ATL18HV	ATL24HV	
Nominal Capacity (BTU/h)	6000	9000	12000		18000	24000	
Voltage @ 50/60Hz 1-Ph (V)	230	230	115	230	230	115	230
Full Load Amps (FLA) Cool (A)	0.9	0.6	3.12	1.8	1.8	2.3	1.15
Full Load Amps (FLA) Blower (A)	0.7	0.5	3.2	1.4	1	3.4	1.3
Optional Electric Heat (kW) ⁽²⁾	1	1	2		2	1.5	
Heater Amps (A)	5	4.8	20.6	10.1	9.7	16.4	7.8
Max. Circuit Breaker (A)	5	5	5		5	5	
Min. Circuit Ampacity (A)	2	1	4	3	3	3	2
Water Flow (gpm/lpm)	1.5/5.7	2.25/8.6	3/11.4		4.5/17.1	6/22.8	
Air Flow (cfm/m3h) ⁽³⁾	200/340	233/396	350/595		467/793	730/1241	
External Static Pressure (inH2O/Pa)	0.3/74.7	0.3/74.7	0.3/74.7		0.3/74.7	0.3/74.7	
Height-Deck Mount (in/mm) ⁽⁴⁾	8/204	8/204	8.1/206		8.1/206	10/254	
Height-Suspension Mount (in/mm) ⁽⁴⁾	8.1/206	8.1/206	8.1/206		8.1/206	10.1/257	
Max. Width (in/mm)	19.6/498	19.6/498	31.6/803		31.6/803	42.9/1090	
Depth-Without Heat (in/mm) ⁽⁴⁾	18/458	19.7/501	17.9/455		25.5/648	22/559	
Depth-With Heat (in/mm) ⁽⁴⁾	23.7/602	25.4/646	23.6/600		19.8/503	27.7/704	
Drain Connection Size (in)	½	½	½		½	½	
Drain Connection Type	tube stubs	tube stubs	tube stubs		tube stubs	tube stubs	
Chilled Water Connection Size (in)	½	½	½		½	½	
Chilled Water Connection Type	FPT	FPT	FPT		FPT	FPT	
Quantity-Duct Connections	1	1	2		2	1	
Min. Supply Duct Size (in/mm) ⁽⁵⁾	4/102	6/153	6/153		7/178	9/229	
Min. Supply Air Grille Size (sq in/sq cm)	35/226	49/317	35/226		49/317	147/949	
Min. Return Air Grille Size (sq in/sq cm)	70/452	98/633	130/839		200/1291	240/1549	
Pan Style	sloped	sloped	sloped		sloped	sloped	


¹ Add 'FC' at end of model name for optional flow control; the default valve position is to the left of the coil (as one faces it), so add 'R' to the model for the valve on the right side; add 'kW' for amount of optional electric heat in kilowatts.
² 1.5kW is recommended for the ATL24 because it has one blower. 2kW is the maximum.
³ Air flow data is for units without electric heat. Electric heat reduces air flow by an amount to be determined.
⁴ All dimensions ± 0.30 in. (8 mm).
⁵ ATL12, ATL18, and ATL36 models have dual blowers and therefore two supply duct rings.

Dimensions

ATL-HV Dimensions

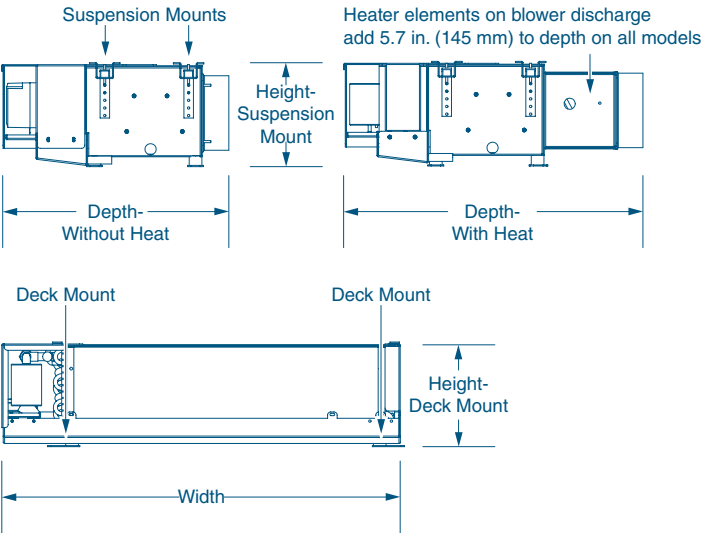

ATL16F Dimensions

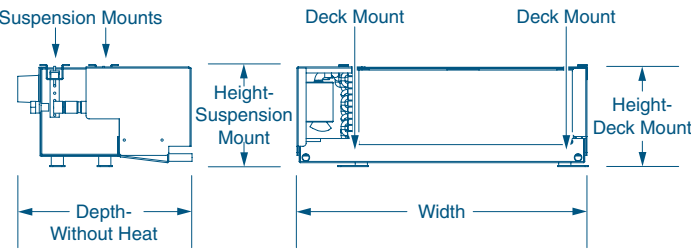

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2551 Rev. 20150410 Specifications and availability subject to change without notice.

Dealer



ATL-DC Series Low-Profile Air Handlers

Whisper Quiet Units Ideal for Height-Restrictive Spaces



The ATL-DC series of chilled water air handlers represents an improved design approach to low-profile, draw-through air handlers. These "open top" units allow easier maintenance access and reduced dimensions overall.

The top panel of ATL units can be removed for maintenance access to the blower(s). In this way, the unit can be serviced without disturbing the drain pan. The drain stems face aft (toward the blower side) to minimize footprint. Furthermore, the optional electric heaters are mounted on the blower discharge instead of inside the plenum, thereby eliminating the depth added to the plenum area for 6K-18K units.

The ATL-DC series features "WhisperCool" DC blowers that are ultra quiet yet strong enough to overcome high-static-pressure duct.

Capacities of the ATL-DC series range from 6,000 to 36,000 BTU/hr. The blowers are mounted horizontally for an exceptionally low profile, making these units ideal for height-restrictive installations. They can be suspended from above or supported from beneath and suspension hardware is included. Vibration-isolation mounts reduce noise and the transmission of vibrations to the installation platform.

The drain pan has an anti-slosh, anti-fungal foam lining and extends to under the valve motor and plumbing. The water connections are insulated against secondary condensation, and the valve can be mounted on the left (standard) or right (optional).

Key Benefits

- DC "WhisperCool" blowers are extremely quiet yet powerful enough to overcome high-static-pressure duct
- Improved design for easier servicing, smaller dimensions overall
- Top panel is removable for easier service access
- Dual blowers are mounted horizontally for exceptionally low profile
- Suspend from above or support from beneath (hardware included)
- Enclosed design
- Internal components are insulated against secondary condensation
- Vibration-isolation mounts reduce noise and vibration.
- Bypass valve has removable power head for simple servicing
- Valve body is soldered to unit to prevent leaks
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Remote air bleeder on 6 ft. (1.8 m) of flexible tubing with ball valve
- Valve on left (standard) or on right (optional)
- Optional flow control automatically balances circulated water throughout the system
- Optional Electric Heat
- Optional Breathe Easy™ microparticle air filter

Specifications for ATL-DC Series Low-Profile Air Handlers

Model	ATL6DC	ATL9DC	ATL12DC	ATL18DC	ATL24DC	ATL36DC
Nominal Capacity (BTU/h)	6000	9000	12000	18000	24000	36000
Voltage @ 50/60Hz 1-Ph (V)	230	230	230	230	230	230
Full Load Amps (FLA) Cool (A)	1.4	1.4	2.8	2.8	3.9	7.8
Full Load Amps (FLA) Blower (A)	1.4	1.4	2.8	2.8	1.5	3
Optional Electric Heat (kW) ⁽¹⁾	1	1	2	2	1.5	3
Heater Amps (A)	5.7	5.7	11.5	11.5	8	16
Max. Circuit Breaker (A)	5	5	5	5	5	30
Min. Circuit Ampacity (A)	2	2	4	4	5	23
Water Flow (gpm/lpm)	1.5/5.7	2.25/8.6	3/11.4	4.5/17.1	6/22.8	9/34.1
Air Flow (cfm/m ³ h) ⁽²⁾	200/340	233/396	350/595	467/793	670/1139	1000/1700
External Static Pressure	1.75 inH ₂ O/435.8 Pa	0.6/149.4	1.75/435.8	0.6 inH ₂ O/149.4 Pa	0.3 inH ₂ O/74.7 Pa	0.3 inH ₂ O/74.7 Pa
Height-Deck Mount (in/mm) ⁽³⁾	8/204	8/204	8/204	8/204	10/254	10/254
Height-Suspension Mount (in/mm) ⁽³⁾	8.2/209	8.2/209	8.2/209	8.2/209	10.1/257	10.1/257
Max. Width (in/mm) ⁽³⁾	19.6/498	19.6/498	31.5/801	31.5/801	43.8/1113	61.8/1570
Depth-Without Heat (in/mm) ⁽³⁾	19.7/501	19.7/501	17.9/455	17.9/455	20.5/521	20.5/521
Depth-With Heat (in/mm) ⁽³⁾	25.4/646	25.4/646	23.6/600	23.6/600	26.2/666	26.2/666
Drain Connection Size (in)	½	½	½	½	½	½
Drain Connection Type	tube stubs	FPT	tube stubs	tube stubs	tube stubs	tube stubs
Chilled Water Connection Size (in)	½	½	½	½	½	½
Chilled Water Connection Type	FPT	FPT	FPT	FPT	FPT	FPT
Quantity-Duct Connections	1	1	2	2	1	2
Min. Supply Duct Size (in/mm) ⁽⁴⁾	4/102	6/153	6/153	7/178	9/229	10/254
Min. Supply Air Grille Size (sq in/sq cm)	35/226	49/317	35/226	49/317	147/949	168/1084
Min. Return Air Grille Size (sq in/sq cm)	70/452	98/633	130/839	200/1291	240/1549	360/2323
Pan Style	sloped	sloped	sloped	sloped	sloped	sloped


¹ 1.5kW is recommended for the ATL24 because it has one blower. 2kW is the maximum.

² Air flow data is for units without electric heat. Electric heat reduces air flow by an amount to be determined.

³ All dimensions ± 0.30 in. (8 mm).

⁴ ATL12, ATL18, and ATL36 models have dual blowers and therefore two supply duct rings.

Dimensions

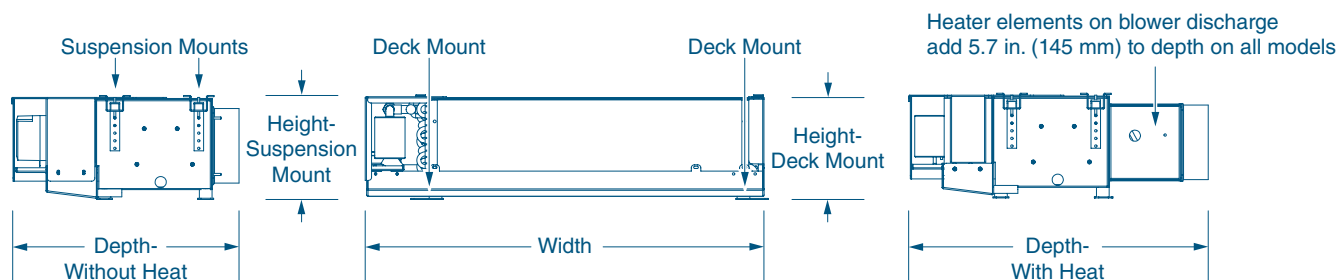

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



ABL-HV Series Chilled Water Air Handlers

Ideal for Height-Restrictive Installations; High-Velocity Blowers



The ABL-HV series of draw-through air handlers for chilled water systems is ideal for installation in height-restrictive spaces. Insulating foam covers the condensate pan, blower housing, shroud, and coil end cover to reduce noise and secondary condensation. The condensate pan also has an anti-slosh, anti-fungal foam lining. The ABL-HV series is designed to replace the CBLB models.

ABL-HV air handlers are an excellent choice for overhead applications where height is limited. The dual high-velocity (HV) blowers are mounted at a 90 degree angle to the evaporator coil for dramatically reduced depth. The optional cushioned mounts, which minimize vibration and noise, allow the unit to be suspended from above or supported from beneath.

ABL-HV air handlers are constructed with corrosion-resistant materials. They feature "positive-flow" drain pans with anti-slosh foam lining and are fully insulated against secondary condensation. Electric heat is optional.

Key Benefits


- Dual blowers are mounted at 90-degree angle to the coil for minimum depth
- Suspend from above or support from beneath (suspension hardware sold separately)
- Optional cushioned mounts reduce noise and vibration
- Bypass valve has removable power head for simple servicing
- Valve body is soldered to unit to prevent leaks
- Exposed components are insulated against secondary condensation
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Remote air bleeder on 6 ft. (1.8 m) of flexible tubing with ball valve
- Valve on left (standard) or on right (optional)
- Optional flow control automatically balances circulated water throughout the system
- Optional Electric Heat
- Optional Breathe Easy™ microparticle air filter

Specifications for ABL-HV Series Chilled Water Air Handlers

Model	ABL18HV	ABL24HV
Nominal Capacity (BTU/h)	18000	24000
Voltage @ 50/60Hz 1-Ph (V)	230	230
Full Load Amps (FLA) Cool (A)	1.32	1.4
Optional Electric Heat (kW)	3	3
Max. Circuit Breaker (A)	5	5
Min. Circuit Ampacity (A)	2	2
Water Flow (gpm/lpm)	4.5/17.1	6/22.8
Height-Deck Mount (in/mm) ⁽¹⁾	11.9/303	11.9/303
Height-Suspension Mount (in/mm) ⁽¹⁾	12.2/310	12.2/310
Max. Width (in/mm) ⁽¹⁾	37.3/948	46/1169
Max. Depth (in/mm) ⁽¹⁾	TBD	15/381
Drain Connection Size (in)	½	½
Drain Connection Type	FPT	FPT
Chilled Water Connection Size (in)	½	½
Chilled Water Connection Type	FPT	FPT
Quantity-Duct Connections	2	2
Min. Supply Duct Size (in/mm)	7/178	9/229
Min. Supply Air Grille Size (sq in/sq cm)	50/323	70/452
Min. Return Air Grille Size (sq in/sq cm)	200/1291	240/1549

¹ All dimensions ± 0.30 in. (8 mm).

Dimensions

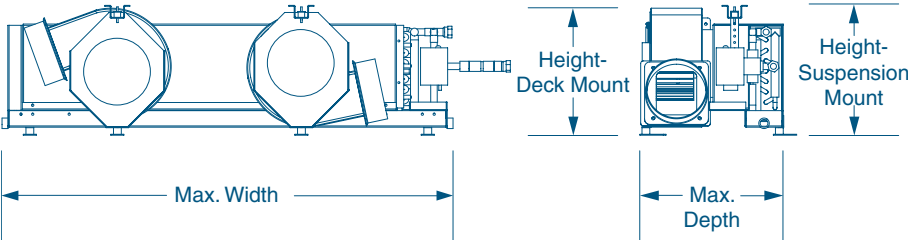

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



ABL-DC Series Air Handlers

Whisper Quiet Units Ideal for Height-Restrictive Spaces



The ABL-DC series of marine draw-through air handlers for chilled water systems is ideal for installation in height-restrictive spaces. Insulating foam covers the condensate pan, blower housing, shroud, and coil end cover to reduce noise and secondary condensation. The condensate pan also has an anti-slosh, anti-fungal foam lining. The ABL-DC series is designed to replace the CBLB models.

ABL air handlers are an excellent choice for overhead applications where height is limited. The dual DC "WhisperCool" blowers are ultra quiet yet overcome high-static-pressure duct. The blowers are mounted at a 90 degree angle to the evaporator coil for dramatically reduced depth. The optional cushioned mounts, which minimize vibration and noise, allow the unit to be suspended from above or supported from beneath.

ABL-DC air handlers are constructed with corrosion-resistant materials. They feature "positive-flow" drain pans with anti-slosh foam lining and are fully insulated against secondary condensation. Electric heat is optional.

Key Benefits


- DC "WhisperCool" blowers are extremely quiet yet powerful enough to overcome high-static-pressure duct
- Dual blowers are mounted at 90-degree angle to the coil for minimum depth
- Suspend from above or support from beneath (suspension hardware sold separately)
- Optional cushioned mounts reduce noise and vibration
- Bypass valve has removable power head for simple servicing
- Valve body is soldered to unit to prevent leaks
- Exposed components are insulated against secondary condensation
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Remote air bleeder on 6 ft. (1.8 m) of flexible tubing with ball valve
- Valve on left (standard) or on right (optional)
- Optional flow control automatically balances circulated water throughout the system
- Optional Electric Heat
- Optional Breathe Easy™ microparticle air filter

Specifications for ABL-DC Series Air Handlers

Model ⁽¹⁾	ABL18DC	ABL24DC
Nominal Capacity (BTU/h)	18000	24000
Voltage @ 50/60Hz 1-Ph (V)	230	230
Full Load Amps (FLA) Cool (A)	6.4	6.4
Full Load Amps (FLA) Blower (A)	6.4	6.4
Optional Electric Heat (kW)	3	3
Heater Amps (A)	13	13
Max. Circuit Breaker (A)	10	10
Min. Circuit Ampacity (A)	8	8
Water Flow (gpm/lpm)	4.5/17.1	6/22.8
Air Flow (cfm/m3h)	600/1020	800/1360
External Static Pressure (inH2O/Pa)	2.7/672.4	2.5/622.5
Height-Deck Mount (in/mm) ⁽²⁾	11.9/303	11.9/303
Height-Suspension Mount (in/mm) ⁽²⁾	12.2/310	12.2/310
Max. Width (in/mm) ⁽²⁾	37.3/948	43.3/1100
Max. Depth (in/mm) ⁽²⁾	15.8/402	15.8/402
Drain Connection Size (in)	1/2	1/2
Drain Connection Type	FPT	FPT
Chilled Water Connection Size (in)	1/2	1/2
Chilled Water Connection Type	FPT	FPT
Quantity-Duct Connections	2	2
Min. Supply Duct Size (in/mm)	7/178	9/229
Min. Supply Air Grille Size (sq in/sq cm)	50/323	70/452
Min. Return Air Grille Size (sq in/sq cm)	200/1291	240/1549

¹ 'Z' indicates 230V. Add '-FC' for optional flow control; add '-L' for valve on the left relative to the blower side of the coil (right side is the default); add '#kW' for amount of optional electric heat in kilowatts.
² All dimensions ± 0.30 in. (8 mm).

Dimensions

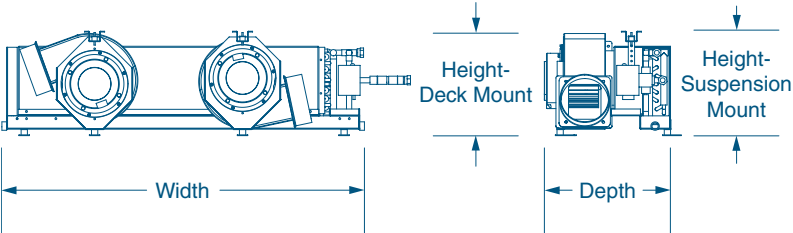

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2562 Rev. 20150410 Specifications and availability subject to change without notice.

Dealer



ATV-HV Series Slim-Profile Air Handlers

Designed With Depth Constraints In Mind



ATV-HV chilled water air handlers were designed for applications where very little depth is available. Showcasing a unique vertical layout, these air handlers have the coil low and the blower above.

Featuring a slim profile, ATV-HV air handlers make previously unusable areas suitable for installation. With a depth of only 9.4 in. (240 mm), these units can be hidden in side areas instead of in places above or below, where most air handlers are installed. ATV-HV air handlers have a high-velocity blower with internal motor that keeps overall unit depth to a minimum, resulting in easier installation.

ATV-HV air handlers are available in two configurations: Low-profile (LP) and square (SQ). LP models have a reduced height for installations where height, as well as depth, is restricted. SQ models have a square blower assembly that allows 90° of blower rotation in the field.

ATV-HV air handlers are constructed with corrosion-resistant materials and have drain pans lined with an anti-slosh, anti-fungal foam. Exposed metal surfaces are insulated against secondary condensation. Options include a flow control valve that balances chilled water distribution throughout the system, and electric heat.



The ATV's slim-profile design is ideal for installation in walls and other areas where depth is limited.

Key Benefits


- Unique vertical design results in dramatically reduced depth
- Fits into walls and other tight spaces
- Exposed components are insulated against secondary condensation
- High-velocity (HV) blower with internal motor to reduce depth
- Low-profile models (ATV*HV-LP) have a reduced height for tight installation spaces
- Square models (ATV*HV-SQ) allow 90° of blower rotation in the field
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Drain pan has anti-slosh, anti-fungal foam lining
- Optional flow control automatically balances circulated water throughout the system
- Optional electric heat
- Optional Breathe Easy™ microparticle air filter

Specifications for ATV-HV Series Slim-Profile Air Handlers

Model ⁽¹⁾	ATV6HV-LP		ATV9HV-LP		ATV12HV-LP		ATV18HV-LP		ATV24HV-LP	
Nominal Capacity - Cool (BTU/h)	6000		9000		12000		18000		24000	
Voltage @ 50/60Hz 1-Ph (V)	115	230	115	230	115	230	230	115	230	115
Full Load Amps (FLA) Cool (A)	1.6	0.9	1.1	0.7	1.5	0.7	1.15	2.3	1.64	2.3
Full Load Amps (FLA) Blower (A)	1.6	0.9	1.1	0.7	1.5	0.7	1.15	2.3	1.64	2.3
Optional Electric Heat (kW)	1		1.5		1.5		3		3	
Heater Amps (A)	8.7	4.3	13	6.5	13	6.5	13	26.1	13	26.1
Max. Circuit Breaker (A)	5		5		5		5		5	
Min. Circuit Ampacity (A)	2		2		2		2		3	
Water Flow (gpm/lpm)	1.5/5.7		2.25/8.6		3/11.4		4.5/17.1		6/22.8	
Air Flow (cfm/m3h)	245/417		280/476		370/629		485/825		709/1205	
External Static Pressure	0.3/74.7		0.3/74.7		0.3/74.7		0.3/74.7		0.3/74.7	
Min. Height (in/mm)	20.2/514		21.5/547		21.5/547		25.4/646		29.1/740	
Max. Height (in/mm)	22.9/582		24.1/613		24.1/613		27.8/707		31.3/796	
Max. Width (in/mm)	20.2/514		20.2/514		20.2/514		21.2/539		23.7/602	
Min. Depth (in/mm)	4.3/110		4.3/110		4.3/110		6/153		7.7/196	
Max. Depth (in/mm)	TBD		7.4/188		8/204		8.9/227		TBD	
Drain Connection Size (in)	½		½		½		½		½	
Drain Connection Type	FPT		FPT		FPT		FPT		FPT	
Chilled Water Connection Size (in)	½		½		½		½		½	
Chilled Water Connection Type	FPT		FPT		FPT		FPT		FPT	
Min. Supply Duct Size (in/mm)	5/127		6/153		6/153		7/178		8/204	
Min. Supply Air Grille Size (sq in/sq cm)	35/226		49/317		70/452		100/646		140/904	
Min. Return Air Grille Size (sq in/sq cm)	70/452		98/633		130/839		200/1291		240/1549	

¹ 'LP' indicates low-profile configuration; replace with 'SQ' for square configuration.

Dimensions

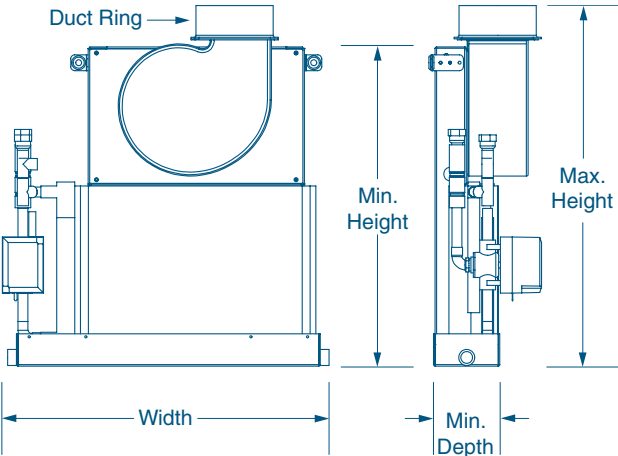

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2567 Rev. 20140107 Specifications and availability subject to change without notice.

Dealer



ATV-DC Series Slim-Profile Air Handlers

Designed With Depth Constraints In Mind



ATV-DC chilled water air handlers were designed for applications where very little depth is available. Showcasing a unique vertical layout, these air handlers have the coil low and the blower above.

Featuring a slim profile, ATV-DC air handlers make previously unusable areas suitable for installation. With a depth of only 9.4 in. (240 mm), these units can be hidden in side areas instead of in places above or below, where most air handlers are installed. ATV-DC air handlers have DC "WhisperCool" blowers that are ultra quiet yet strong enough to overcome high-static-pressure duct. The internal blower motor keeps overall unit depth to a minimum, resulting in easier installation.

ATV air handlers are available in two configurations: Low-profile (LP) and square (SQ). LP models have a reduced height for installations where height, as well as depth, is restricted. SQ models have a square blower assembly that allows 90° of blower rotation in the field.

ATV air handlers are constructed with corrosion-resistant materials and have drain pans lined with an anti-slosh, anti-fungal foam. Exposed metal surfaces are insulated against secondary condensation. Options include a flow control valve that balances chilled water distribution throughout the system, and electric heat.

Key Benefits


- DC "WhisperCool" blowers are extremely quiet yet powerful enough to overcome high-static-pressure duct
- Unique vertical design results in dramatically reduced depth
- Fits into walls and other tight spaces
- Low-profile models (ATV*DC-LP) have a reduced height for tight installation spaces
- Square models (ATV*DC-SQ) allow 90° of blower rotation in the field
- Exposed components are insulated against secondary condensation
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Optional flow control automatically balances circulated water throughout the system
- Optional electric heat

Specifications for ATV-DC Series Slim-Profile Air Handlers

Model ⁽¹⁾	ATV6DC-LP	ATV9DC-LP	ATV12DC-LP	ATV18DC-LP	ATV24DC-LP	ATV36DC-LP
Nominal Capacity - Cool (BTU/h)	6000	9000	12000	18000	24000	36000
Voltage @ 50/60Hz 1-Ph (V)	230	230	230	230	230	230
Full Load Amps (FLA) Cool (A) ⁽²⁾	1.4	1.4	3.2	3.9	3.9	3.9
Full Load Amps (FLA) Blower (A)	1.4	1.4	3.2	3.9	3.9	3.9
Optional Electric Heat (kW)	1	1.5	1.5	3	3	3
Heater Amps (A)	4.3	6.5	6.5	13	13	13
Max. Circuit Breaker (A)	10	5	5	5	15	5
Min. Circuit Ampacity (A)	7	2	4	3	13	5
Water Flow (gpm/lpm)	1.5/5.7	2.25/8.6	3/11.4	4.5/17.1	6/22.8	9/34.1
Air Flow (cfm/m3h)	290/493	290/493	421/716	548/932	670/1139	670/1139
External Static Pressure	0.3/74.7	0.3/74.7	2.1/522.9	1.4/348.6	0.3/74.7	0.3/74.7
Min. Height (in/mm) ⁽³⁾	20.2/514	20.2/514	20.6/524	25.4/646	27.7/704	31.9/811
Max. Height (in/mm) ⁽³⁾	22.9/582	22.9/582	24.1/613	27.9/709	29.9/760	34.7/882
Max. Width (in/mm) ⁽³⁾	20.3/516	20.3/516	20.3/516	21.1/536	23.7/602	29.4/747
Min. Depth (in/mm) ⁽³⁾	4.1/105	4.1/105	4.2/107	6/153	7.7/196	7.6/194
Max. Depth (in/mm) ⁽³⁾	7.5/191	7.5/191	9.4/239	10.1/257	10.8/275	11.4/290
Drain Connection Size (in)	½	½	½	½	½	½
Drain Connection Type	FPT	FPT	FPT	FPT	FPT	FPT
Chilled Water Connection Size (in)	½	½	½	½	½	1
Chilled Water Connection Type	FPT	FPT	FPT	FPT	FPT	FPT
Min. Supply Duct Size (in/mm)	5/127	6/153	6/153	7/178	8/204	8/204
Min. Supply Air Grille Size (sq in/sq cm)	35/226	49/317	70/452	100/646	140/904	196/1265
Min. Return Air Grille Size (sq in/sq cm)	70/452	98/633	130/839	200/1291	240/1549	360/2323

¹ 'Z' indicates 230V. Add '-FC' for optional flow control; add '-L' for valve on the left relative to the blower side of the coil (right side is the default); add '#kW' for amount of optional electric heat in kilowatts.
² Blower amps will be reduced at lower speed/cfm or higher static pressure. Amps listed are at free air.
³ All dimensions ± 0.30 in. (8 mm).

Dimensions

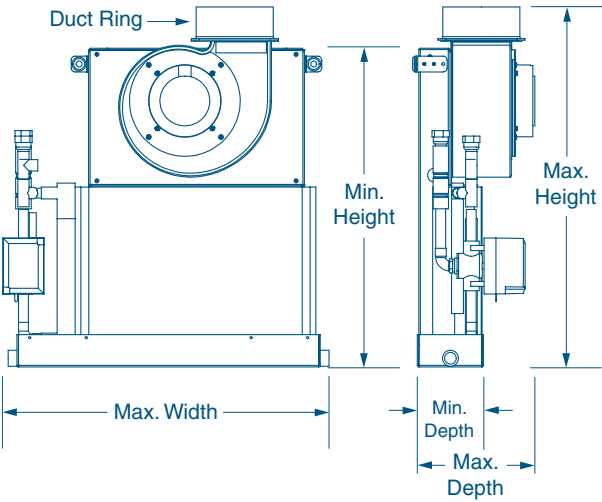

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2564 Rev. 20130329 Specifications and availability subject to change without notice.

Dealer



AT-HV-MU Series Fresh Air Make-Up Air Handlers

Keep Air Inside the Vessel From Going Stale



The AT series of fresh-air make-up air handlers (AT-HV-MU) for chilled water systems duct in outside air, cool and dehumidify it, then re-heat it to room temperature and duct it to various interior spaces. Typically, crew cabins and other spaces two or more levels below deck will benefit from the use of these systems.

AT-HV-MU air handlers consist of water coil, valve, electric heater, and high-velocity (HV) blower mounted on a condensate pan/chassis with cushioned mounts to reduce noise and vibration. The specially-designed water coil cools and dehumidifies outside air in one pass. The coil, as well as the blower and all exposed sheet metal components, is coated to resist corrosion. A motorized three-way bypass valve controls the flow of circulated water through the coil. The HV blower has a high-efficiency internal motor, and can be rotated as required for installation. Ultra-quiet DC “WhisperCool” blowers are available. An electric heater with redundant over-temperature protection reheats the cooled air to room temperature.

The sloped condensate pan reduces standing water and is lined with anti-fungal, anti-slosh foam. The blower, condensate pan, and other exposed areas are insulated against secondary condensation. An optional modulating loop-water flow control regulates the water through the unit to ensure proper water distribution to all air handlers.

Key Benefits


- Compact design
- Corrosion-resistant coating on evaporator coil, blower, and drain pan
- Patented
- Drain pan has anti-slosh, anti-fungal foam lining
- High-velocity (HV) fully-insulated blowers are rotatable
- Integrated three-way bypass valve with easy-change power head
- Electric heat with two-stage electric heat overload
- Heater assembly accessible from the top or side
- Large coil shroud volume for optimal performance
- Brass hose barb loop-water connections
- Electrical box can be remotely mounted up to 6 ft. (1.8 m)
- Remote air bleeder on 6 ft. (1.8 m) of flexible tubing with ball valve
- Built-in flow control balances chilled water distribution

Specifications for AT-HV-MU Series Fresh Air Make-Up Air Handlers

Model	AT18HVZ-1.5KW-MU	AT24HVZ-2X1KW-MU	AT36HVZ-FC-2X1.5KW-MU
Nominal Capacity (BTU/h)	18000	24000	36000
Voltage @ 50/60Hz 1-Ph (V) ⁽¹⁾	230	230	230
Full Load Amps (FLA) Cool (A)	0.9	0.7	1.6
Full Load Amps (FLA) Heat (A)	7.5	9.4	14.7
Full Load Amps (FLA) Blower (A) ⁽²⁾	0.9	0.7	1.6
Optional Electric Heat (kW)	1.5	1	1.5
Max. Circuit Breaker (A)	10	10	20
Min. Circuit Ampacity (A)	8	10	16
Water Flow (gpm/lpm)	4.5/17.1	6/22.8	9/34.1
Air Flow (cfm/m3h)	174/296	276/469	550/935
External Static Pressure	0.72/179.3	0.36/89.7	0.75/186.8
Max. Height (in/mm) ⁽³⁾	15/381	16.6/422	19.5/496
Max. Width (in/mm) ⁽³⁾	20.3/516	22.6/575	26.6/676
Max. Depth (in/mm) ⁽³⁾	12.3/313	15.3/389	18/458
Drain Connection Size (in)	½	½	½
Drain Connection Type	FPT	FPT	FPT
Chilled Water Connection Size (in)	½	½	1
Chilled Water Connection Type	FPT	FPT	FPT
Min. Supply Duct Size (in/mm)	5/127	6/153	8/204
Min. Return Air Grille Size (sq in/sq cm)	100/646	140/904	220/1420
Net Weight (lbs/kg) ⁽⁴⁾	35/15.9	44/20	63.75/29
Gross Weight (lbs/kg)	43/19.6	58/26.4	81.25/36.9

¹ Verify voltage! Units with SCR-based controls are designed for either 208VAC or 230VAC. Add "208" to the end of the model number for 208VAC units.
² Electrical and blower data is based on 50Hz performance.
³ All dimensions ± 0.30 in. (8 mm).
⁴ All weights ± 10%

Dimensions

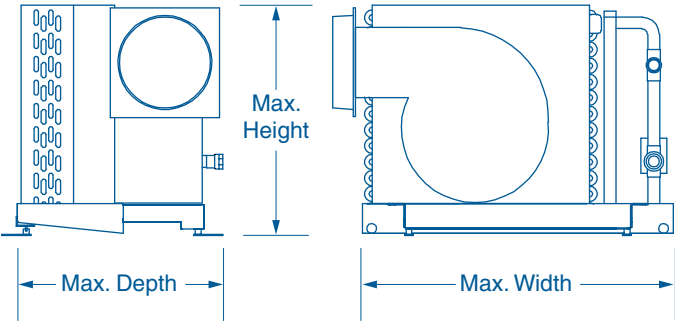

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2404 Rev. 20130607 Specifications and availability subject to change without notice.

Dealer



Smart Touch Cabin Control

Intuitive Use & Customization at Your Fingertips



Introducing Smart Touch, the easiest to use, most intuitive marine cabin control in the world.

Highly customizable, Smart Touch lets you choose whether the home screen displays a lot of information or just a basic temperature control. Intuitive submenus step the user through full system access. Even the color palette displayed on each control can be chosen by the user.

When not in active mode the control can display a standard display image, customizable text such as the name of the boat, or a blank screen. A future option will enable displaying a customizable image such as a logo.

Smart Touch displays a full text description of the system fault and troubleshooting procedures — no more cryptic codes. A fault history is maintained, including the date and time of each occurrence.

The Test/Commission mode uses interactive screens to guide the user through the initial startup process and is used for interactive system testing and diagnostics. Service alerts display on screen.

Non-volatile memory ensures the control maintains its configuration settings, schedule, and fault history indefinitely. An internal battery maintains the date and time when switching between power sources.

Smart Touch features the first-ever programmable scheduler for marine air conditioning, and includes CAN bus networking capability. In addition, key portions of the user manual are stored as well as a listing of Dometic service dealers.

Smart Touch works with Marine Air's Passport I/O microprocessor control system. An optional wireless upgrade will be available in the future as well as a smart phone application.

Key Benefits

- Highly customizable displays enable personal preferences
- Intuitive icons and menus for easy use
- Interactive screen leads you through start-up and troubleshooting
- Programmable scheduler lets you set start-up and shut-down times or temperature changes
- Built-in help for certain features
- Faults and service alerts display on screen
- CAN Bus compatible
- Smart Touch display mounting plate accommodates the Vimar Eikon and Eikon Evo bezels (sold separately)



Smart Touch features a full-color interactive display.



Convenient smart phone links to online content such as manuals and service dealer locator.




Modern, stylish Vimar Eikon bezel complements many boat interiors.

Specifications for Smart Touch Cabin Control

Model	Smart Touch Display
Height-Display (in/mm)	2.874/73
Width-Display (in/mm)	4.309/110
Depth-Display (in/mm)	1.368/35
Height-Cut Out (in/mm)	2.165/55
Width-Cut Out (in/mm)	2.90/74
Height-Between Mounting Holes (in/mm)	2.165/55
Width-Between Mounting Holes (in/mm)	3.465/88
Height-Eikon Bezel (in/mm)	3.31/84
Width-Eikon Bezel (in/mm)	4.72/120
Height-Eikon Evo Bezel (in/mm)	4.15/106
Width-Eikon Evo Bezel (in/mm)	4.62/118

Dimensions

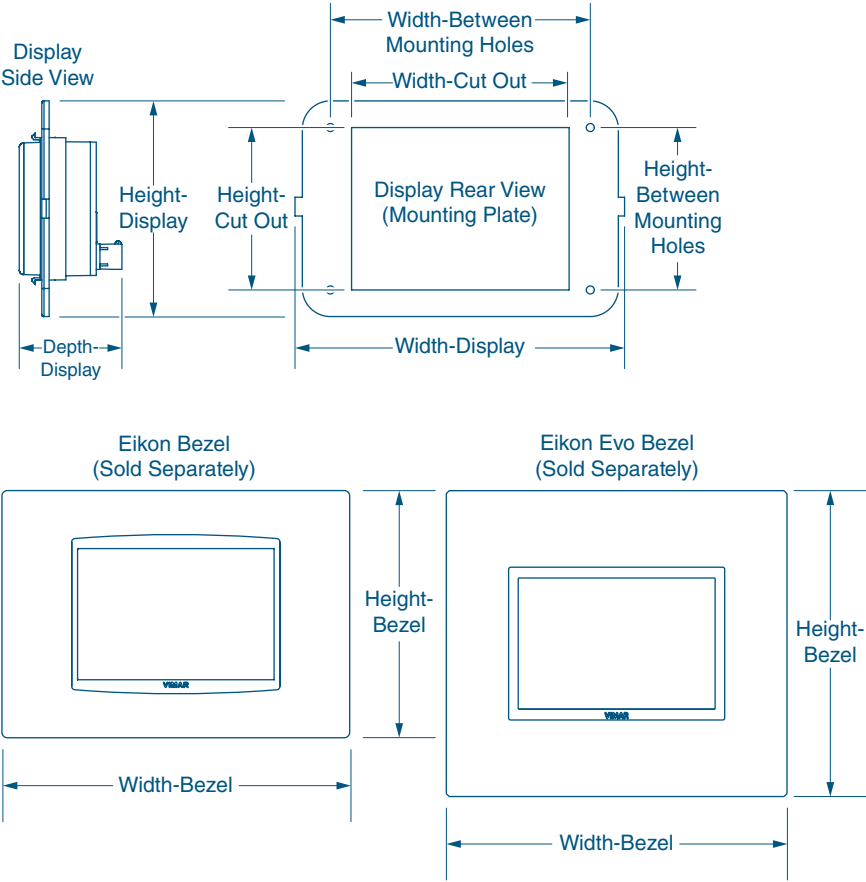

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3231 Rev. 20141017 Specifications and availability subject to change without notice.

Dealer



Elite™ Display

With Passport I/O Microprocessor Control System

Now
Supports
Vimar Eikon



Elite keypad/display shown with Vimar® Eikon bezel (sold separately)

The Elite™ display provides easy-to-use climate control in an attractive, modern package. It works with Marine Air's Passport I/O microprocessor-based system for the precise control and monitoring of marine air conditioning systems. Passport I/O operates at 115 or 230 volts, each operable at 50 or 60 cycles.

The Elite display features raised buttons for easy access and control. The Mode button is used to scroll through the four modes of operation, simplifying programming. Decorative snap-on Vimar® bezels (sold separately) are available in a variety of colors and materials to match your vessel's interior.

Passport I/O is flash programmable, which allows for future software upgrades without the need to replace the circuit board. A ground shield protects against static interference and RF noise, and the circuit board is conformally coated to provide high resistance to external damage or corrosion. A display cable with modular jacks connects the panel to the system controller. Non-volatile memory stores all user-selectable parameters indefinitely during operation and through any power-failure situations.

The Passport I/O circuit board utilizes state-of-the art SMT technology and has an optional integrated CAN-bus network adapter that provides ship-wide network monitoring of multiple DX systems and air handlers. The adapter adheres to CAN-bus Standard 2.0B and is fully ISO compliant. It is available in two high-level CAN-bus communication protocols to support connection to several popular helm and cabin touchscreen control systems.



Elite keypad/display shown with Vimar® Idea bezel in gold (sold separately).

Key Benefits

- Automatic humidity control reduces moisture when the boat is unattended
- Cool-only, heat-only, dehumidify, and automatic mode selection
- New optional electric-heat relay
- Optional CAN bus adapter puts cabin control on the ship-wide network
- Displays Fahrenheit and Celsius
- Automatic or manual fan-speed selection
- Cycle fan with compressor or continuous fan operation
- Cycle pump with compressor or continuous pump operation
- Compressor time delay staging for multiple unit applications
- Dimmable display
- Controls shaded pole and split capacitor fan motors
- Compressor fail-safe protection
- Programmable de-icing cycle
- Built-in air sensor
- Optional remote air sensor
- Available with popular Vimar bezels, including the Eikon (sold separately)

Specifications for Elite™ Display

Model	ELITE (VIMAR IDEA BEZEL)	ELITE (VIMAR EIKON BEZEL)
Set Point Temp. Range (°F/°C)	65 - 85/18.4 - 29.5	65 - 85/18.4 - 29.5
Display Temp. Range (°F/°C)	5 - 150/-15 - 65.6	5 - 150/-15 - 65.6
Air Sensor Temp. Range (°F/°C)	5 - 150/-15 - 65.6	5 - 150/-15 - 65.6
Sensor Accuracy (°F/°C)	2/77/-16.7/25	2/77/-16.7/25
Water Inlet Sensor Cable Length (AH-Elite) (ft/m)	7/3	7/3
Display Cable Length (ft/m - ft/m) ⁽¹⁾	10/3.1 - 75/22.9	10/3.1 - 75/22.9
Optional Alternate/Remote Air Cable Length (ft/m) ⁽¹⁾	7 - 60/2.2 - 18.3	7 - 60/2.2 - 18.3
Optional Outside Air Sensor Cable Length (ft/m) ⁽¹⁾	7 - 50/2.2 - 15.3	7 - 50/2.2 - 15.3
Optional Pump Sentry Cable Length (ft/m)	7 - 60/2.2 - 18.3	7 - 60/2.2 - 18.3
Water Inlet Sensor Cable Length (AH-Elite) (ft/m)	7 - 60/3 - 19	7 - 60/3 - 19
Height-Display (in/mm)	2.96/76	2.88/74
Width-Display (in/mm)	4.41/113	4.45/114
Depth-Display (in/mm)	1.08/28	1.05/27
Panel Cut-Out Height (in/mm)	2.19/56	1.88/48
Panel Cut-Out Width (in/mm)	3.31/85	2.75/70
Height-Bezel (in/mm)	2.96/76	3.31/85
Width-Bezel (in/mm)	4.41/113	4.69/120

¹ Maximum length is 75 ft. (23 m).

Electrical Specifications for Passport I/O Control System


Voltage	Cycle	Compressor Output-Control System ⁽¹⁾	R.V. Output-Control System ⁽³⁾	Fan Output	Heater Output	Pump Output ⁽²⁾
115 or 230	50 or 60Hz	40V	0.25V	6V	30/20V	1/4 HP (0.2kW) 1/2 HP (0.4kW)

¹ Maximum loads should not exceed 85% of listed output ratings.


² Does not apply to AH-Elite or AH-Passport (for chilled water systems).

³ Used as water valve output for AH-Elite and AH-Passport (for chilled water systems).


Dimensions

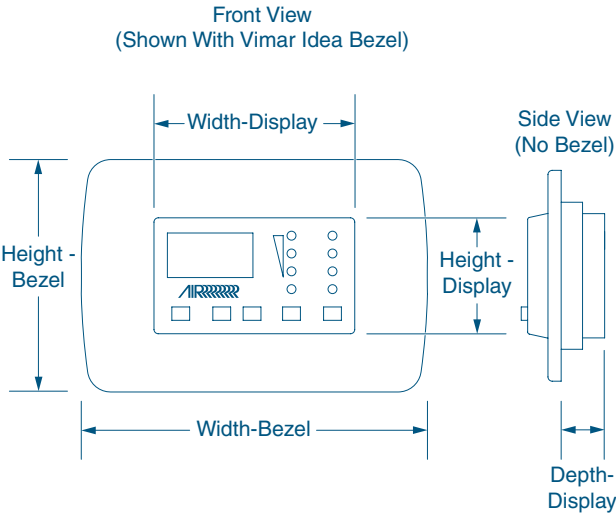


Installation

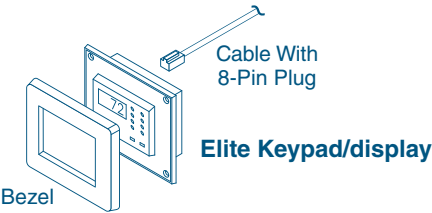


Self-Contained Systems

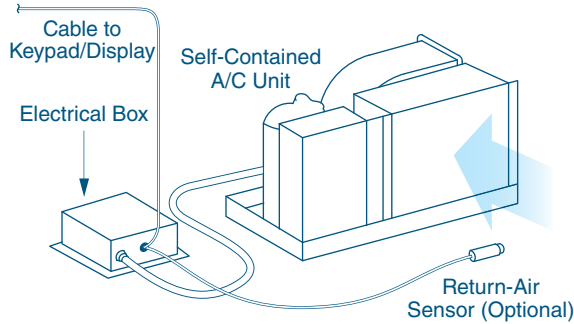

Split-Gas Systems

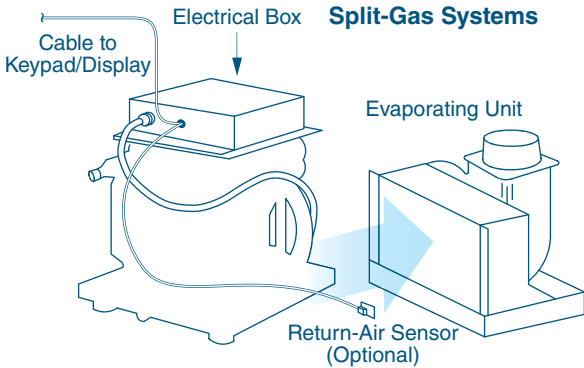

Chilled Water Systems

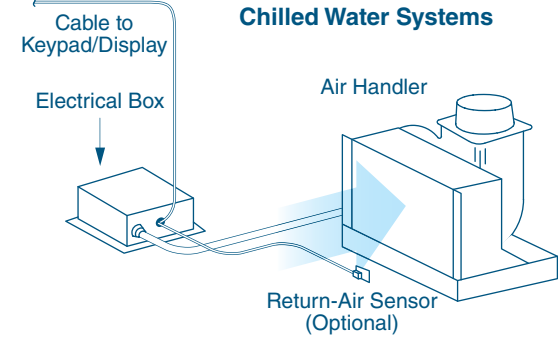

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494


INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



Passport I/O Control & Elite™ Display Retrofit Kit

Upgrade Your Old Marine Air Control

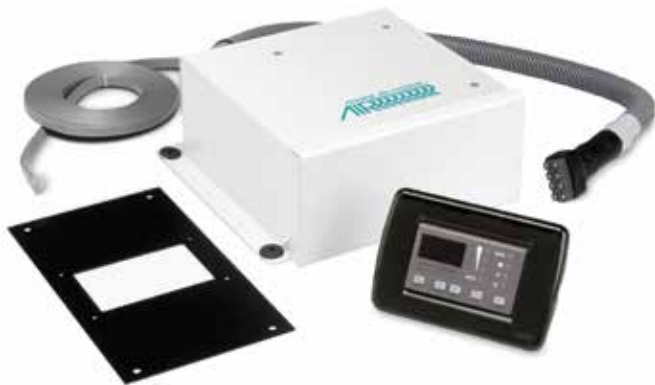

Left to right: Vertical mounting plate (available as horizontal), Passport I/O electrical box with wiring harness, and Elite keypad/display with Vimar® bezel

The Passport I/O microprocessor control system with Elite™ display provides precise, programmable control of cabin temperatures and humidity levels, and is now available in a retrofit kit for Marine Air direct expansion and chilled water applications. The "Elite Retrofit Kit" is used for direct expansion (DX) self-contained units and evaporators, while the "AH-Elite Retrofit Kit" is used for chilled water air handlers. All kits utilize the Passport I/O circuit board and either direct expansion or chilled water software. The control operates at 115 or 230VAC, 50 or 60Hz.

Elite Retrofit Kits have everything necessary to upgrade an older Marine Air control, including the MCP 3-knob, Passport II, ECU, and ECU-Maxx controls. Specify either self-contained (SC) or split central system (CS) when ordering. The AH-Elite Retrofit Kit will replace the older AH-Passport display.

Each kit contains the Elite display, a Vimar® Black Poly Rondo bezel, the Passport I/O circuit board mounted in an electrical box, alternate air sensor and display cables, wiring harness, operation manual, quick reference card and mounting plate. Specify either a horizontal or vertical mounting plate when replacing an ECU or a 3-knob mechanical control.

The entire assembly is grounded and protected against static interference and RF noise. The circuit board is conformally coated to provide high resistance to external damage or corrosion. Internal self-diagnostic programs provide complete electronic checks of all lights, sensors, keys and circuits. M.O.V.s (metal oxide varistors) provide component and board protection. Non-volatile memory stores all user-selectable parameters indefinitely during operation or any power failure situation.

Passport I/O meets or exceeds applicable ABYC, U.S. Coast Guard Regulations and CE Directives.

Key Benefits


- Complete kit allows the replacement of your old cabin control with the advanced, easy-to-use Elite keypad/display
- Includes electric box with Passport I/O microprocessor, Elite keypad/display, Vimar® bezel, horizontal and vertical mounting plates, and connecting cables
- Polarized plug for easy connection to existing self-contained unit
- Convenient phone-type modular jack plugs into keypad/display
- Mounting plates for replacing horizontal or vertical MCP 3-knob control
- Automatic humidity control reduces moisture when the boat is unattended
- Cool-only, heat-only, dehumidify, and automatic mode selection
- New optional electric-heat relay
- Optional CAN bus adapter puts cabin control on the ship-wide network
- Displays Fahrenheit and Celsius
- Automatic or manual fan-speed selection
- Cycle fan with compressor or continuous fan operation
- Cycle pump with compressor or continuous pump operation
- Dimmable display
- Controls shaded pole and split capacitor fan motors
- Compressor fail-safe protection

Specifications for Elite Retrofit Kits


Model ⁽¹⁾	Retro (SC/CS/AH) Elite (HRZ/VRT)
Elite Display Dimensions (H x W x D)	2.96 x 4.41 x 1.08 in. (75 x 112 x 27 mm)
Bezel Dimensions (H x W) ⁽²⁾	3.25 x 4.85 in. (83 x 123 mm)
Mounting Plate Dimensions	Refer to Dimensions Drawing
Display Cable Length (ft/m)	Self-Contained System: 15/4.6 Split System: 30/9.1 Chilled Water System: 15/4.6
Water Inlet Sensor Cable Length (ft/m)	7/2.1
Other Cables Available ⁽³⁾	Most Cables Available in 5 ft. (1.5 m) Increments
Display Cable Length (ft/m)	10-75/3.0-22.9
Alternate/Remote Cable Length (ft/m) ⁽⁴⁾	7-60/2.1-18.3
Outside Air Sensor Cable Length (ft/m)	7-50/2.1-15.2
Pump Sentry Cable Length (ft/m)	7-60/2.1-18.3
Water Inlet Sensor Cable Length (ft/m)	7-60/2.1-18.3

¹ Specify SC for self-contained, CS for central system, or AH for a chilled water air handler. Specify HRZ for horizontal or VRT for vertical when replacing MCP 3-knob or ECU controls only.
² Retrofit kits include a black poly Rondo-type bezel (#335441). Other Idea bezels from Vimar are available in Rondo or Classica styles and are sold separately. Dimensions may vary slightly depending on the style.
³ Maximum length for display, air sensor, and water inlet sensor cables is 75 ft. (23 m).
⁴ Air sensor cables longer than 7 ft. (2.1 m) require a remote air sensor card.


Dimensions

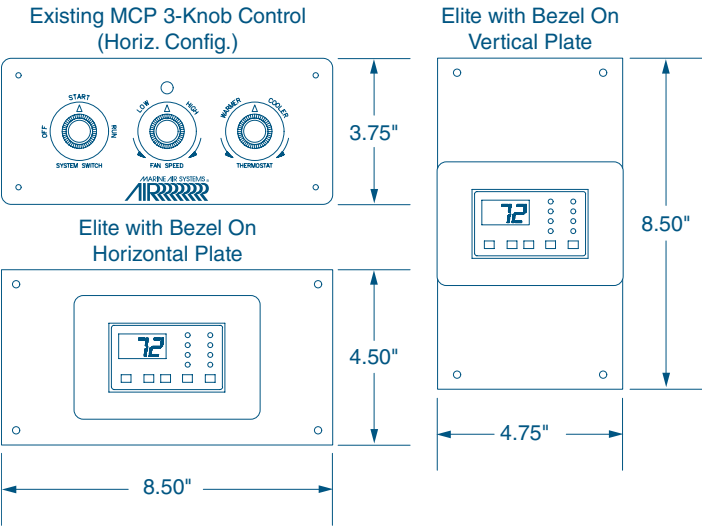


Installation

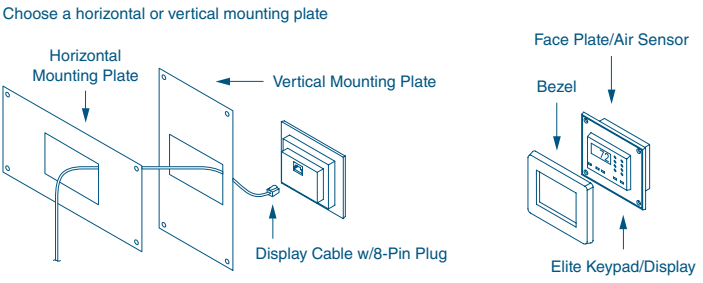

Split-Gas Systems

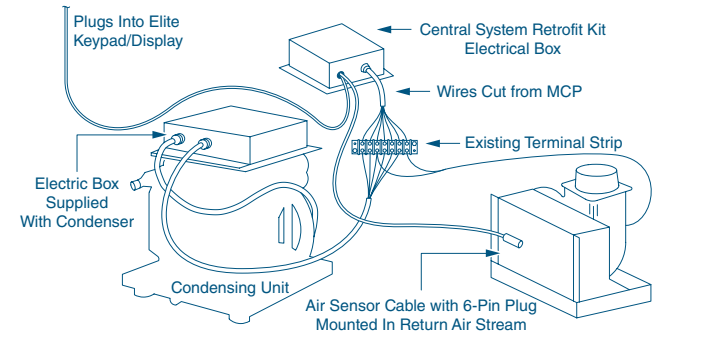

Self-Contained Systems

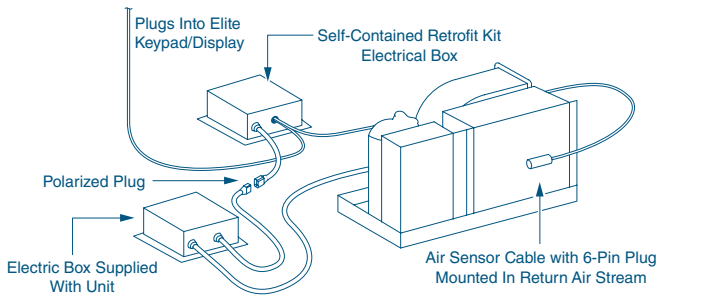

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2240 Rev. 20140926 Specifications and availability subject to change without notice.

Dealer

Compact Passport Display

With Passport I/O Microprocessor Control System



The Compact Passport display is an easy-to-use wall-mountable unit available in black or white. The display has an integrated bezel. The display works with Marine Air's Passport I/O microprocessor-based control system to provide precise control and monitoring of direct expansion and chilled water boat air conditioning systems. Passport I/O is dual voltage, operating at both 115 and 230 Volts, 50 or 60 Hz. In chilled water air handlers, the system is referred to as AH-Passport I/O.

The assembly has a ground shield to protect against static interference and RF noise. The circuit board is conformally coated to provide high resistance to external damage or corrosion.

A display cable with gold plated phone-type modular jacks connects the panel to the system controller. An optional air sensor cable is connected to the circuit board in the same manner. Non-volatile memory stores all user-selectable parameters indefinitely during operation or any power failure situations.

Internal self-diagnostic programs provide complete electronic checks of all lights, sensors, keys and circuits. Fused circuits and M.O.V.s (metal oxide varistors) provide component and board protection.

The Passport I/O control meets or exceeds applicable ABYC, U.S. Coast Guard Regulations and CE Directives.

Key Benefits


- Automatic humidity control reduces moisture when the boat is unattended
- Cool-only, heat-only, dehumidify, and automatic mode selection
- New optional electric-heat relay
- Automatic or manual fan-speed selection
- Cycle fan with compressor or continuous fan operation
- Calibration of fan-speed settings and temp display for precise control
- Controls shaded pole and split capacitor fan motors
- Compressor fail-safe protection
- Programmable de-icing cycle
- Built-in air sensor
- Optional remote air sensor
- Dimmable display
- Low voltage for optimum safety

Specifications for Compact Passport Display

Model	Passport Compact
Set Point Temp. Range (°F/°C)	65 - 85/18.4 - 29.5
Display Temp. Range (°F/°C)	5 - 150/-15 - 65.6
Air Sensor Temp. Range (°F/°C)	5 - 150/-15 - 65.6
Sensor Accuracy (°F/°C)	2/77/-16.7/25
Water Inlet Sensor Cable Length (AH-Elite) (ft/m)	7/3
Display Cable Length (ft/m - ft/m) ⁽¹⁾	10/3.1 - 75/22.9
Optional Alternate/Remote Air Cable Length (ft/m) ⁽¹⁾	7 - 60/2.2 - 18.3
Optional Outside Air Sensor Cable Length (ft/m) ⁽¹⁾	7 - 50/2.2 - 15.3
Optional Pump Sentry Cable Length (ft/m)	7 - 60/2.2 - 18.3
Water Inlet Sensor Cable Length (AH-Elite) (ft/m)	7 - 60/3 - 19
Height-Display (in/mm)	2.5/64
Width-Display (in/mm)	3.19/82
Depth-Display (in/mm)	0.94/24
Panel Cut-Out Height (in/mm)	1.875/48
Panel Cut-Out Width (in/mm)	2.5/64

¹ Maximum length is 75 ft. (23 m).
² Bezels sold separately; dimensions may vary depending on style.

Dimensions

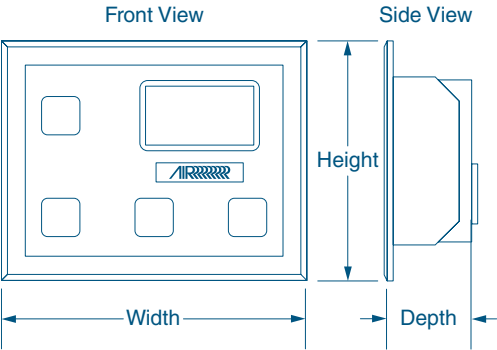





Electrical Specifications for Passport I/O Control System

Voltage	Cycle	Compressor Output-Control System ⁽¹⁾	R.V. Output-Control System ⁽³⁾	Fan Output	Heater Output	Pump Output ⁽²⁾
115 or 230	50 or 60Hz	40V	0.25V	6V	30/20V	1/4 HP (0.2kW) 1/2 HP (0.4kW)

¹ Maximum loads should not exceed 85% of listed output ratings.
² Does not apply to AH-Elite or AH-Passport (for chilled water systems).
³ Used as water valve output for AH-Elite and AH-Passport (for chilled water systems).

Installation

Passport Keypad/display

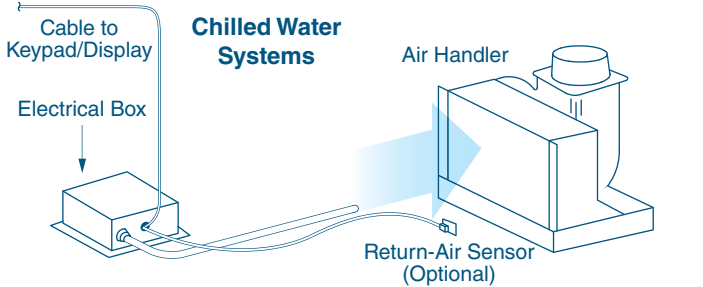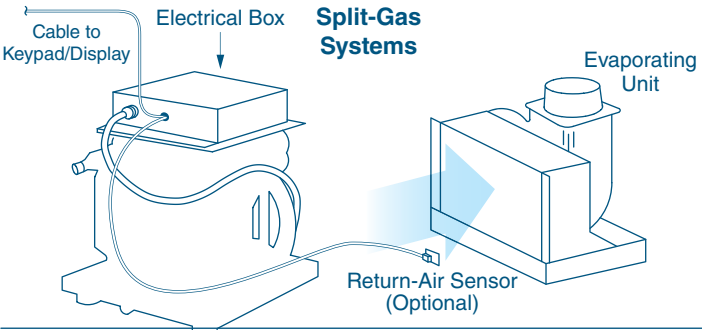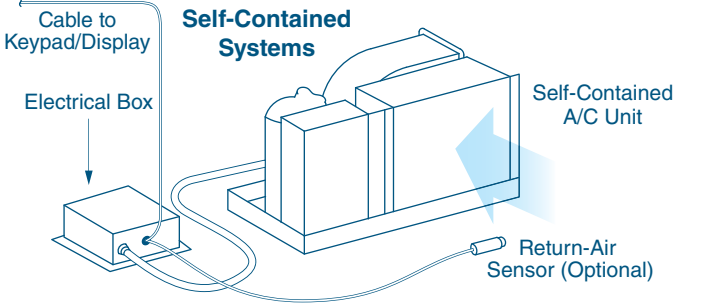

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



NEW

Smart Touch Chiller Control

Intuitive High-Resolution Display



Easy Chiller Management

Managing a multi-stage chiller system has never been easier. The Smart Touch Chiller Control is intuitive to use and provides clear indications of current status, operational trends, animated real-time monitoring of the refrigeration circuit, and more.

The high resolution display can be mounted in the chiller system's electrical box or at a convenient remote location, and is available in three screen sizes: 7 in. (178 mm), 10 in. (254 mm), or 13 in. (331 mm).

Innovative Features

- Increased analog inputs – Monitor important conditions such as water loop glycol level, and utilize dynamic superheat control for improved performance.
- Condenser protection – Monitor differential pressure to protect from catastrophic failures by adjusting the speed of the seawater pump to maintain constant pressure or adjust to proper pressure and receive an alert about a potential problem.
- Alarm messaging – Receive text or email message in real time if a fault occurs (network required).
- Load banking – Works with your generator to keep it running at a healthy and efficient 70-80% operational load by turning on additional stages as required. Eliminates the need for a separate load bank.
- Photographic confirmation – Future integration with room controls that will allow the user to monitor room A/C performance.
- Data logger – Download Alarm Faults and Historical Trend Data onto a USB for analysis.

The Smart Touch Chiller Control works with any Cruisair or Marine Air chiller and can be retrofitted to replace an existing Dometic Digital Control (DDC) or Tempered Water Logic Control (TWLC).



Quickly set chill water temperature setpoint and monitor water temperature.



Monitor the performance of the electronic expansion valve.



Review historical trend data, and much more.


Key Benefits

- High-resolution display
- Intuitive touch-screen operation
- Available in three screen sizes
- Networks to ship management controls via Modbus, CAN Bus, Ethernet, or BACnet
- Remote access through smart phone or computer via internet
- Increased analog inputs for detailed system monitoring
- Alarm messaging via text or email
- Load banking feature eliminates the need for a separate load bank
- Tracks operational trends of system for precise preventive maintenance
- For new chiller systems or replace Dometic Marine DDCs and TWLCs

Dimensions for Optional Remote Smart Touch Display

Model	13 in. Display	10 in. Display	7 in. Display
Height (in/mm)	10.5/267	9.13/232	5.79/147
Width (in/mm)	13.27/337	11.30/287	7.36/187
Depth (in/mm)	1.65/42	1.65/42	1.77/45
Cutout Height (in/mm)	10.1/256	8.70/221	5.35/136
Cutout Width (in/mm)	12.83/326	10.87/276	6.93/176

Dimensions

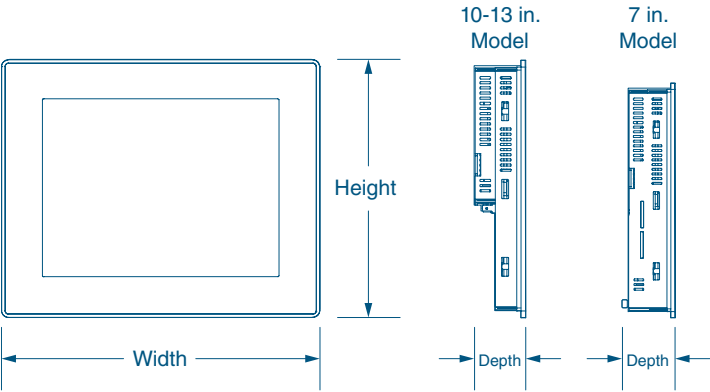

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3292 Rev. 20140117 Specifications and availability subject to change without notice.

Dealer



Programmable Logic Control

For Precise Staged Chiller Monitoring & Coordination



LCD keypad/display installed in PLC custom electrical box

The Programmable Logic Control (PLC) is an advanced microprocessor chiller control specifically designed for marine circulated water systems. The PLC system maximizes system performance, protects the chillers with advanced fault protection monitoring and shut-down routines, and has easy menu-driven operation supplying the user with important system information.

System redundancy and easy field repair were the priorities when the PLC was developed. Each chiller in a PLC system has a dedicated power/logic board, and the boards are networked together to form an integrated system (automatically controlling up to 6 chillers). This design means that a single board or network failure will not shut down the entire system.

Interaction with the system is through the PLC keypad/display. A simple six-button keypad is used to change operation mode and to navigate through the menus to view and change system parameters. A backlit LCD display supplies easy to read information about the system, including water temperatures, operation mode, which chillers are running, and other detailed information. Text on the keypad clearly indicates Cool or Heat modes, and faults. An alarm buzzer on the keypad can also signal a fault. Additional PLC keypads can be installed to allow remote system access.

Set up and operation of the PLC is fully automatic. Once configured with the number of chillers connected, it programs the temperature staging and unit rotation of the units to pre-programmed parameters. The PLC board has non-volatile memory so settings and recorded information are not lost even if power is interrupted. The large memory capacity allows the PLC to record run time of the compressors and pumps, and store the fault history of each unit.

The system monitors all the inputs and will display various faults based on the information received. Each fault has a specific routine that protects the unit while helping to prevent nuisance faults. Some will generate a sustained shutdown, which must be reset from the PLC keypad.

If a fault is sensed, the fault LED on the PLC keypad will light (and the buzzer will sound, if activated) and the specific fault will be displayed on the LCD screen. The fault signal output on the PLC boards will also be powered.

Another feature of the PLC is that it can be connected to an on-board PLC computer to allow full remote access of the system. The PLC supports networking to a ship's system via RS 485 (Modbus).

Key Benefits

- Provides central control for chillers with up to six stages
- Optimizes compressor operation
- Displays water temperatures, compressor run times, diagnostic faults, and more
- Keypad/display has six buttons and eight-line LCD
- Circuit breakers for compressors and pumps
- Records and logs faults and run times
- Optional current transducers to monitor compressor and pump amperage
- Optional seawater temperature sensors
- Optional refrigerant pressure transducers
- Optional loop water and seawater pressure transducers
- Control over optional electric immersion heat or fuel-fired boiler
- Optional remote unit shutdown for load shedding
- Optional fault signal output for remote alarm

Specifications for Multi-Stage Chiller
Electrical Box

No. of Chiller Stages ⁽¹⁾	2 to 3	4	5
Height (in/mm)	24.0/610	24.0/610	24.0/610
Width (in/mm)	22.0/560	30.0/760	35.0/890
Depth (in/mm)	7.75/197	7.75/197	7.75/197

¹ For six-stage electrical box dimensions, please contact a Dometic sales representative at 954-973-2477.

PLC Options


As each PLC multi-panel is custom built, there are many options to consider:

- Spare Pump Switch – Selector switches can be added for backup (spare) pumps.
- Multiple Power Inputs – Up to three power blocks can be installed to help divide the chiller and pump loads.
- Auxiliary Water Heater – Breakers and contactors to control an auxiliary water heater
- Fault Output Relay – A set of “dry” contacts can be installed to operate an alarm on the vessel’s monitoring system.
- Longer Wire Harness – Up to 30 ft. (9 m) is available; 10 ft. (3 m) is standard.
- Frame Mounted Panel – For mounting the PLC on a framed chilled-water system.


In addition to the options above, two PLC upgrade packages are available:

- Level 1 Upgrade Package – Adds current transducers for the compressors and pumps, seawater out temperature sensors in each chiller, a common seawater inlet temperature sensor.
- The Level 2 Upgrade Package – All Level 1 package features, plus high- and low-refrigerant pressure transducers for each chiller, condenser freeze protection, and electronic expansion valve (EEV).

Dimensions

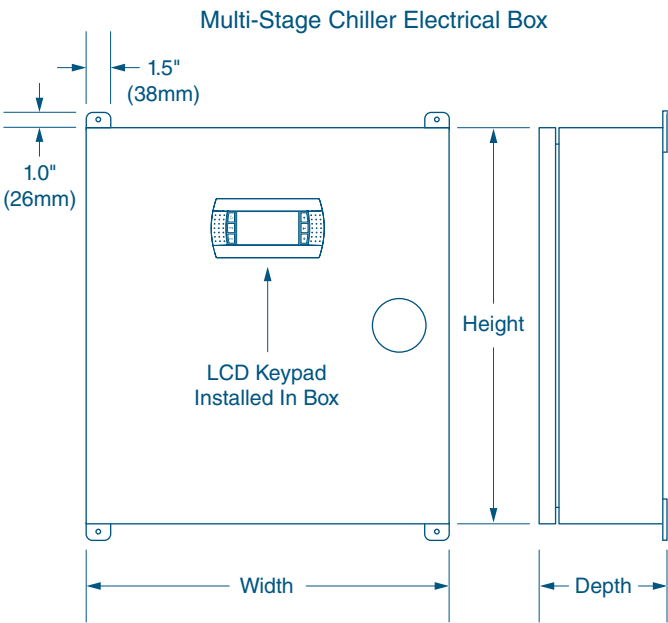

LCD Keypad (For Remote Installation)

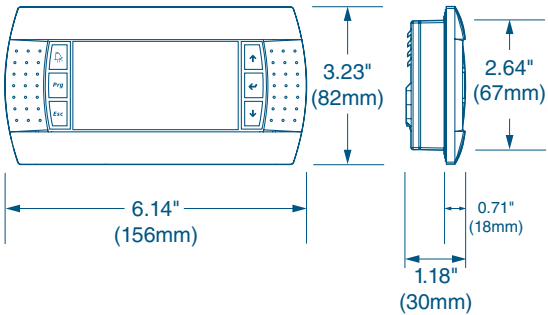

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



Chilled Water Master Controller

For Precise Staged Chiller Monitoring & Coordination



The Chilled Water Master Controller (CWMC) is a microprocessor-based controller designed for the precise monitoring and coordination of Digital Diagnostic Controllers (DDCs) for multiple chilled water systems on a boat. The control unit provides central control for up to six chillers via interfaces with the individual DDC on each chiller. It controls all of the heating and cooling functions for each chiller, as well as operation of the seawater and chilled water pumps. It optimizes compressor operation by automatically changing the lead compressor to evenly distribute run time.

The two-line lit LCD display provides a scrolling read-out of system status including inlet and outlet water temperature of each stage, mixed outlet water temperature of the system, compressor run times, and diagnostic faults including refrigerant high and low pressure, flow switch, low voltage, freeze warning, and high water temperature limit. It also interfaces with a PC via a serial port permitting remote control and monitoring. The PC software also permits the system to be programmed in several different languages. Note that a PC is optional—not required—and the software is available on request.

The entire assembly is grounded and protected against static interference and RF noise. The circuit board is conformally coated to provide high resistance to external damage or corrosion.

A display cable with phone-type modular jacks connects the display to the circuit board. The circuit board has two display jacks. One jack is used for the display local to the chiller the second jack allows a second display to be remotely installed on the bridge or elsewhere. Non-volatile memory stores all user-selectable parameters indefinitely during operation or any power failure situations.

Internal self-diagnostic programs provide complete electronic checks of all lights, sensors, keys, and circuits. The CWMC controller meets or exceeds applicable ABYC, U.S. Coast Guard Regulations and CE Directives.



The CWMC keypad/display features a two-line LCD and provides critical system information including diagnostic faults.

Key Benefits


- Provides central control for chillers with up to six stages
- Optimizes compressor operation
- Displays water temperatures, compressor run times, diagnostic faults, and more
- Interfaces with a PC via serial port for remote control and monitoring (PC sold separately)
- Circuit board is coated for high resistance to damage and corrosion
- Grounded and protected against static interference and RF noise
- Meets or exceeds applicable ABYC, US Coast Guard regulations, and CE directives

Specifications for Multi-Stage Chiller
Electrical Box


No. of Chiller Stages ⁽¹⁾	2 to 3	4	5
Height (in/mm)	24.0/610	24.0/610	24.0/610
Width (in/mm)	22.0/560	30.0/760	35.0/890
Depth (in/mm)	7.75/197	7.75/197	7.75/197

¹ For six-stage electrical box dimensions, please contact a Dometic sales representative at 954-973-2477.

Dimensions

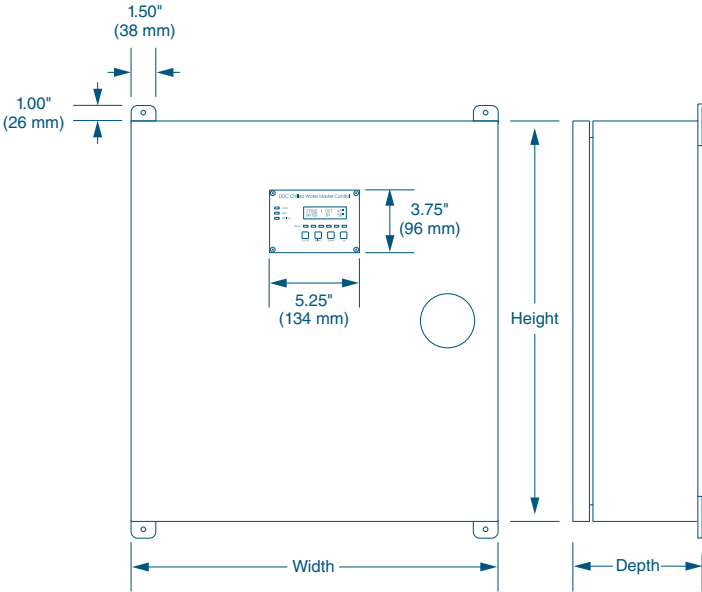

Installation

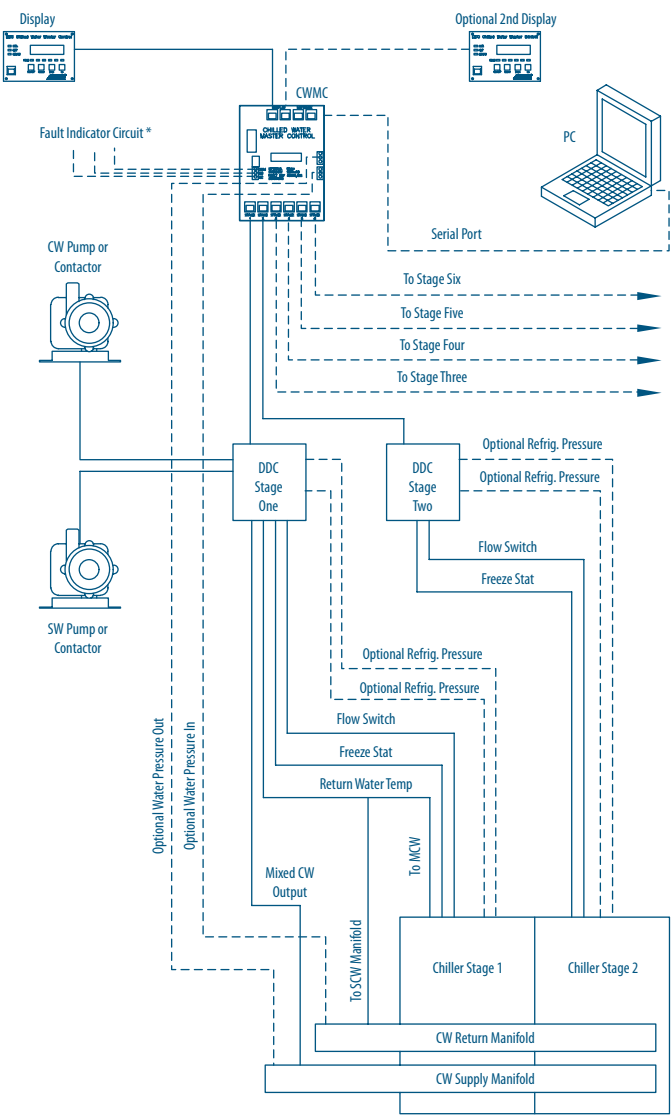

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel: 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2133 Rev. 20120824 Specifications and availability subject to change without notice.

Dealer



Smart Touch Integrated Intelligence Control

Dometic System Intelligence at Your Fingertips



Key Benefits

- Interactive management via smart phone
- Secure access from Dometic global technical support
- Plug-n-play networking software provides interactive solutions
- Network automatically expands as Dometic products are installed
- Easy-to-use interface
- Easy to configure
- Free app for your iPhone, smart phone, iPad, tablet or computer

Can you start your boat's air conditioning before you drive to the marina, or make sure your on-board fishbox ice machine is running the night before the big tournament? Enjoy the peace of mind that Dometic's Smart Touch Integrated Intelligence Control (STIIC) software provides.

STIIC is a plug-n-play networking solution embedded in Dometic products. This revolutionary, user-friendly software connects Dometic systems such as air conditioning, watermakers, ice makers, refrigeration systems, engine ventilation systems and more to the STIIC network and interactively communicates out of the box. Monitor all your Dometic systems from one convenient location via mobile phone, tablet or computer using a WiFi, Ethernet or RS485 connection.

Monitor and manage your Dometic systems from anywhere in the world. Two-way interactive intelligence lets you monitor your systems and troubleshoot problems via a mobile device whether you are on the boat using WiFi or anywhere on the globe using the Internet. Interactive intelligence lets you check a system's status, turn it on, turn it off, or diagnose a problem remotely.

System interaction is easy to understand, but if you do need help, STIIC allows a technician to perform remote diagnostics and talk you through a troubleshooting process without a costly or time-consuming on-site visit.

STIIC is easy to use, requires very little setup and is easily configured in the field. The STIIC network automatically expands as new Dometic products are installed on-board. Use of a product's STIIC interface is optional and can be bypassed at any time since each Dometic system retains its independent controls for hands-on operation on-board.

STIIC also simplifies integration to ship-wide network control systems. Instead of designing an interface for each Dometic product, third-party software developers only need one connection point to STIIC. From that connection point all Dometic products will be visible and controllable.



Remotely monitor, start or stop a Dometic Sea Xchange watermaker.




Quickly set chill water temperature setpoint and monitor water temperature.



A variety of Dometic products connect to the STIIC network, all accessible from the same screen.

STIIC: How It Works

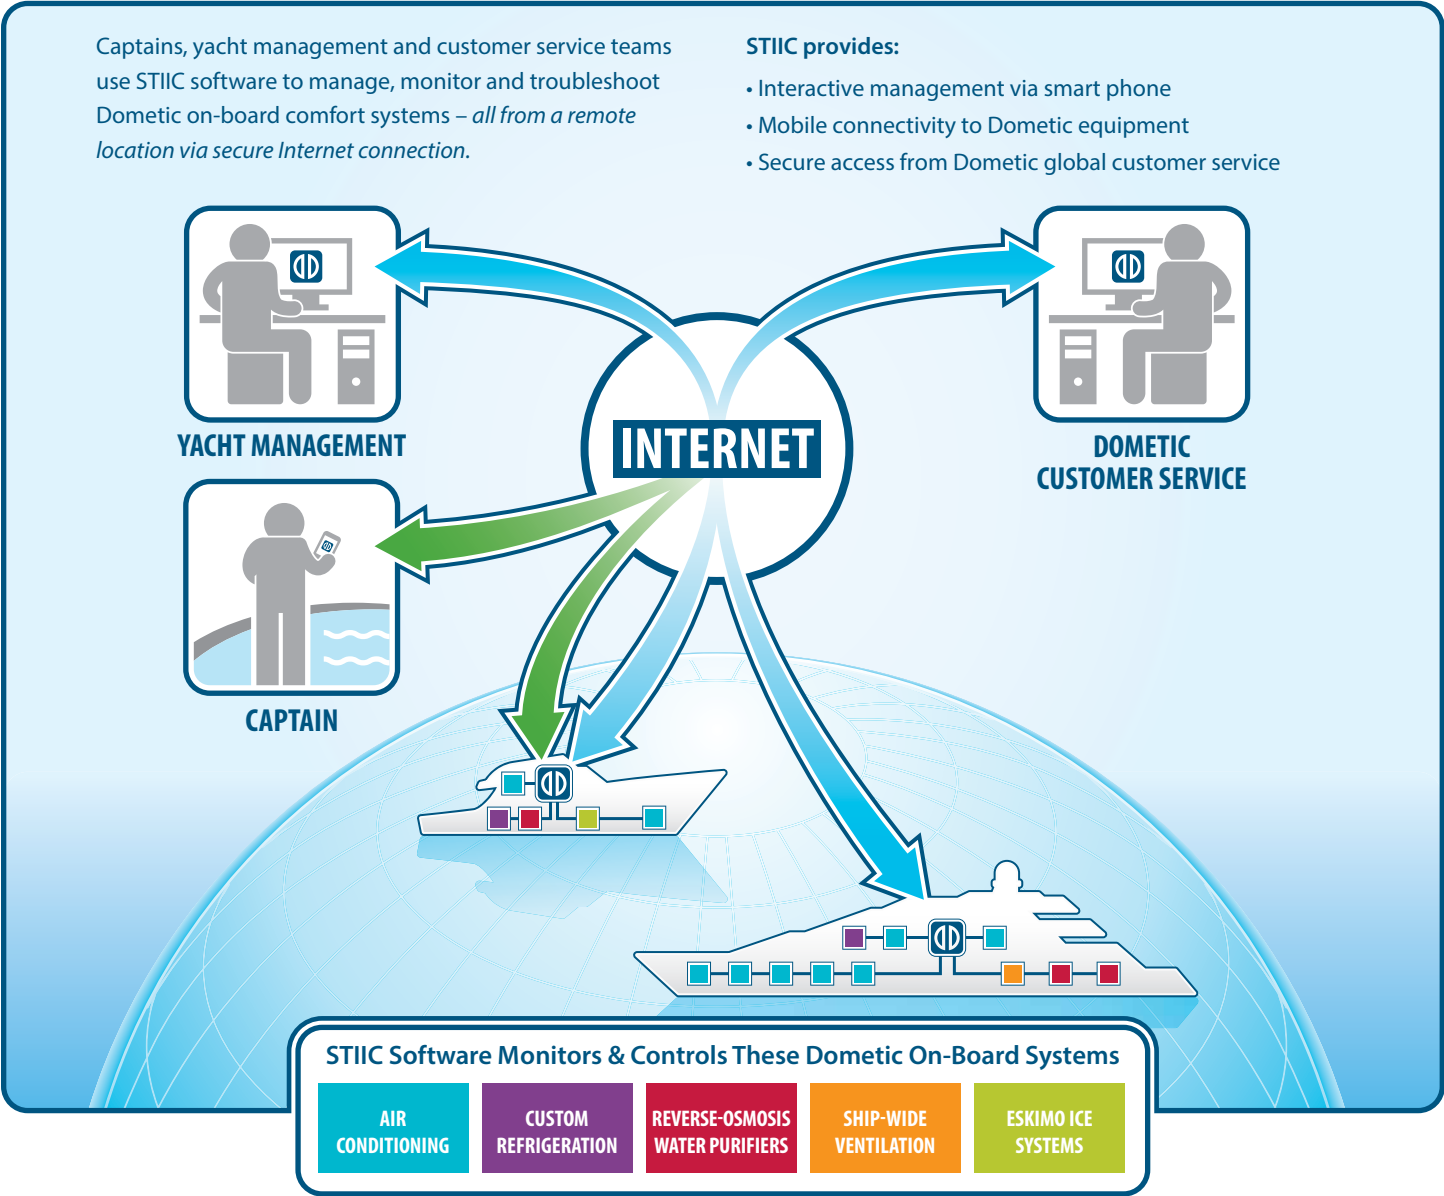

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3373 Rev. 20140919 Specifications and availability subject to change without notice.

Dealer

Breathe Easy™ In-Duct Air Purifiers


Stops Odors & Improves Air Quality



Reduce the odors of tobacco smoke, mildew, mustiness, chemical vapors and toilets, and inhale fresher, cleaner, healthier air on-board. The Breathe Easy™ In-Duct Air Purifier uses innovative Photocatalytic Nano-Mesh technology with ultraviolet (UV) light to improve your boat's air quality. The UV bulb inside uses a specific frequency of light that produces no harmful ozone.

The Breathe Easy nano-mesh is a three-dimensional foam structure coated with titanium-dioxide (TiO₂) and provides 2200% more contact surface area than simple screen structures found in competing air purifiers. This is a significant advantage, as photocatalytic air purification occurs only when airborne contaminants contact the photocatalytic surface.

In addition, the TiO₂ catalyst is restructured at the molecular level to have an increased number of contact surfaces. This formation puts 70% larger molecules on the contact surface and dramatically improves reactivity with contaminants.

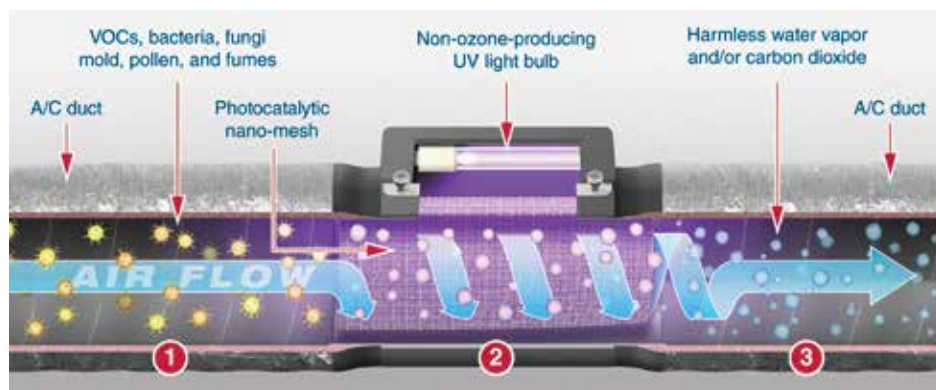

How Breathe Easy Works:

1. Biological contaminants like VOCs, mold spores, bacteria, and viruses pass through the air conditioning duct and into the air purifier system.
2. UV light energy activates the titanium-dioxide catalyst on the surface of the nano-mesh structure. The molecules of pollutants and odors that come in contact with the catalytic nano-mesh structure are reconfigured into non-toxic elements. Vortex action maximizes air contact with the catalytic surface.
3. Significantly cleaner, healthier air exits the photocatalytic air purifier.

Key Benefits

- Eliminates unpleasant odors
- Uses an intense ultraviolet (UV) light that produces no harmful ozone
- Enhances air quality
- Cleaner air may lessen allergy and asthma symptoms
- Silent operation
- Up to 98% reduction in diesel fumes, acetone, benzene, formaldehyde, and other VOCs
- Up to 99.9% reduction in bacteria, fungi, mold, and pollen
- Photocatalytic nano-mesh structure is safe and powerful
- Photocatalytic nano-mesh structure will not degrade under UV light
- UV bulb is easy to replace
- Sizes for common duct diameters
- Will not significantly decrease air flow velocity

Product Testimonial

"I live onboard when we travel and always had problems with congestion and sinus drainage, but have not had a problem with that since we put the Breathe Easy on the boat. I'm very pleased with the product."

— Gray Ingram, Sportfishing Tournament Champion, Owner of Big Oh

"The crew had consistent problems with sore throats and coughs. So we've gone to Dometic. We discovered the air...went from being almost heavy and saturated to being a lot lighter. It was easier to breathe...cleaner. It's fantastic."

— James Rose-Innes, First Mate, 95 ft. Motor Yacht, Ft. Lauderdale, FL

Specifications for Breathe Easy™ In-Duct Air Purifiers

Model	4 IN. DIAMETER	5 IN. DIAMETER	6 IN. DIAMETER	7 IN. DIAMETER	8 IN. DIAMETER
Air Conditioner Capacity (BTU/h)	6000	7000 - 8000	10000 - 12000	14000 - 16000	24000
Voltages @ 50/60Hz (V)	115/220/230	115/220/230	115/220/230	115/220/230	115/220/230
Milliamps @ 115VAC/60Hz (mA)	200	200	200	200	200
Milliamps @ 220VAC/50Hz (mA)	350	350	350	350	350
Milliamps @ 230VAC/60Hz (mA)	200	200	200	200	200
Milliamps @ 12VDC (mA)	200	200	200	200	200
UV Bulb Watts (kW)	12	12	12	20	20
Min. Duct Diameter (in/mm)	5.5/140	5.5/140	6.5/166	7.5/191	8.5/216
Height (in/mm)	6.5/166	6.5/166	7.5/191	8.5/216	9.5/242
Width (in/mm)	10.5/267	10.5/267	10.5/267	13.5/343	13.5/343
Depth (in/mm)	5.5/140	5.5/140	6.5/166	7.5/191	8.5/216

Breathe Easy Competitive Advantages

Photocatalytic Nano-Mesh Technology

- A three-dimensional photocatalytic nano-mesh structure coated with titanium-dioxide (TiO2) provides greater surface area for maximum destruction of airborne contaminants.
- The nano-mesh structure creates very little static pressure, so there is no significant reduction in air flow velocity. In addition, the nano-mesh structure does not have to be cleaned or replaced.



Dometic's Photocatalytic Nano-Mesh Structure



Competitor's Screen

UV Lamps

A single ultraviolet (UV) bulb with dual tubes provides greater intensity and service coverage to activate more of the catalyst for high-performance results.


Safe and Effective Catalyst

TiO2 is found in many common products, such as pigments, processed foods, toothpaste, and cosmetics. It is harmless to people, animals, and the environment.

Laboratory Test Results

Testing of the Breathe Easy In-Duct Air Purifier performed by Environmental Diagnostics Laboratory showed up to 98% reduction in volatile organic compounds (VOCs) and up to 99.9% reduction in bacteria, fungi, mold, and pollen grains.

Dimensions

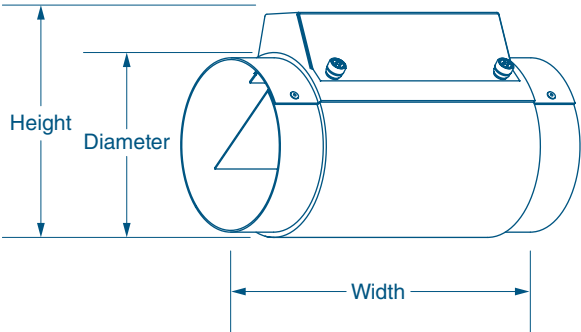

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



Breathe Easy™ Portable Air Purifier


Stops Odors & Improves Air Quality



Breathe Easy Portable Air Purifier and AC adapter with worldwide plugs and 12V power plug (inset)

Reduce the odors of tobacco smoke, mildew, mustiness, chemical vapors, and toilets, and inhale fresher, cleaner, healthier air virtually anywhere you go. Effective in areas up to 500 sq. ft. (46 sq. m), the Breathe Easy™ Portable Air Purifier uses innovative Photocatalytic Nano-Mesh technology with ultraviolet (UV) light to improve air quality. The UV bulb inside uses a specific frequency of light that produces no harmful ozone. The unit operates quietly and has two fan-speed settings. A worldwide AC adapter with plugs is included, as well as a 12V DC power plug.

The Breathe Easy™ nano-mesh is a three-dimensional foam structure coated with titanium-dioxide (TiO₂) and provides 2200% more contact surface area than simple screen structures found in competing air purifiers. This is a significant advantage, as photocatalytic air purification occurs only when airborne contaminants contact the photocatalytic surface. In addition, the TiO₂ catalyst is restructured at the molecular level to have an increased number of contact surfaces. This formation puts 70% larger molecules on the contact surface and dramatically improves reactivity with contaminants.

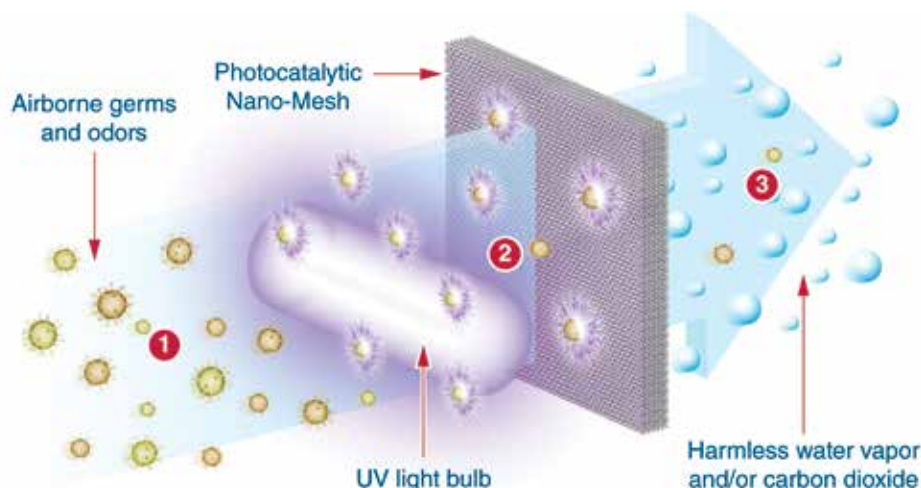

How Breathe Easy Works:

1. Volatile Organic Compounds (VOCs) and biological contaminants enter the air purifier system.
2. UV light energy activates the titanium-dioxide catalyst on the surface of the nano-mesh structure. The molecules of pollutants and odors that come in contact with the catalytic nano-mesh structure are reconfigured into non-toxic elements.
3. Significantly cleaner, healthier air exits the photocatalytic air purifier.

Key Benefits

- Eliminates unpleasant odors
- Uses an intense ultraviolet (UV) light that produces no harmful ozone
- Enhances air quality
- Cleaner air may lessen allergy and asthma symptoms
- Quiet operation with two fan speeds
- Up to 96% reduction in diesel fumes, acetone, benzene, formaldehyde, and other VOCs
- Up to 99% reduction in bacteria, fungi, mold, and pollen
- Photocatalytic nano-mesh structure is safe and powerful
- Photocatalytic nano-mesh structure will not degrade under UV light
- UV bulb is easy to replace
- Effective in areas up to 500 sq. ft. (46 sq. m)
- Worldwide AC power adapter with plugs and 12V DC power plug included

Product Testimonial

"While changing the fuel filter there was a minor diesel spill that permeated the boat. We discovered the Breathe Easy unit and it made all the difference in the world. No more smell and everybody could breathe easy!"


— Nancy Gates-Lee, Boat Owner, Boca Raton, FL

Specifications for Breathe Easy™ Portable Air Purifier

Model ⁽¹⁾	Portable Air Purifier
Part Number (P/N)	4210805
Max. Effective Area (sq ft)	500
Milliamps @ 115VAC/60Hz (mA)	300
Milliamps @ 220VAC/50Hz (mA)	200
Milliamps @ 230VAC/60Hz (mA)	275
Milliamps @ 12VDC (mA)	500
UV Bulb Watts (kW)	5
Height (in/mm)	1.75/45
Width (in/mm)	6.25/159
Depth (in/mm)	4.5/115

¹ Replacement UV bulbs available (P/N 4210804)

Dimensions

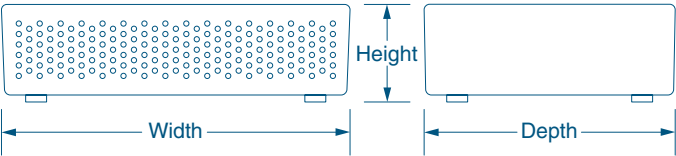

Breathe Easy Competitive Advantages

Photocatalytic Nano-Mesh Technology

- A three-dimensional Photocatalytic nano-mesh structure coated with titanium-dioxide (TiO₂) provides greater surface area for maximum destruction of airborne contaminants.
- The nano-mesh structure creates very little static pressure, so there is no significant reduction in air flow velocity. In addition, the nano-mesh structure does not have to be cleaned or replaced.



Dometic's Photocatalytic Nano-Mesh Structure



Competitor's Screen

UV Lamps

A single ultraviolet (UV) bulb with dual tubes provides greater intensity and service coverage to activate more of the catalyst for high-performance results.

Safe and Effective Catalyst

TiO₂ is found in many common products, such as pigments, processed foods, toothpaste, and cosmetics. It is harmless to people, animals, and the environment.

Laboratory Test Results

Testing of the Breathe Easy In-Duct Air Purifier performed by Environmental Diagnostics Laboratory showed up to 98% reduction in volatile organic compounds (VOCs) and up to 99.9% reduction in bacteria, fungi, mold, and pollen grains.

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2712 Rev. 20131213 Specifications and availability subject to change without notice.

Dealer



Breathe Easy™ Microparticle Air Filters

7X More Effective Than Ordinary A/C Filters

Rated Merv 7



Enjoy cleaner, healthier air quality on your boat with Breathe Easy™ microparticle, anti-allergenic air filters for your air conditioning system. Breathe Easy microparticle air filters are rated Merv 7, making them seven times more effective than ordinary air filters.

Breathe Easy microparticle air filters are efficient and disposable, and are available for most Dometic air conditioning systems. Installation takes only seconds using the existing brackets on either side of the evaporator face. Special pins are included to hold the air filter in place on units which do not have these brackets.

Because Breathe Easy microparticle air filters are highly efficient in removing impurities, they should be changed at frequent intervals to maintain air quality. Dometic recommends changing the filter once every two months when living aboard, once every four months when the air conditioner is used three weekends per month, and once every six months when the air conditioner is used only one or two times per month.

Complete installation and replacement instructions are provided in the air filter packaging.



Breathe Easy microparticle air filters are easy to remove...



...and install.

Key Benefits

- Rated Merv 7 - 7X more effective at capturing airborne microparticles than ordinary foam and mesh filters
- Capture fumes, odors, dust, lint, and pet dander
- Electrostatically-charged fibers attract and retain microparticles that pass through the filter
- Easy installation for all types and models of Marine Air air conditioning systems
- Custom sizes available

Technical Specifications for Breathe Easy™ Microparticle Filters


Filter P/N ⁽¹⁾	Fits Cruisair A/C Models	Fits Marine Air A/C Models	Fits Dometic A/C Models	Width x Height (in)	Width x Height (mm)
235000600	SXF5, SXF5-1, SHF5, SHF5-1, ZF5, ZF5-1	VCD5K/1, VCP5K, VCM5K, VCM5K/1, CLM5KC, CLM5KC/1	ECM5, ECD5	7-7/8 x 9	200 x 229
23500060	SXF7, SXF7-1, SHF7, SHF7-1, SXR7-1, SHR7-1, SXR10, SHR10, SXR12, SHR12	VCD7K/1, VCP7K, VCM7K, VCM7K/1, CMCD7K/1, CMCM7K, CMCM7K/1	ECM6.5, ECD6.5	9-3/8 x 10	238 x 254
23500060	SXR7, SHR7 (old style 7K), ZF3.5	CD3.5, SVC3.5, CLM3.5	N/A	8-1/8 x 8	206 x 203
23500060	SXF10-1, SHF10-1, ZF10-1	VCD10K/1, VCM10K/1, CLM-10KC/1, CMCD10K/1, CMCM10K/1	ECM9, ECD9	10-7/8 x 10	276 x 254
235000604	SXF10, SHF10, ZF10, ZF12	VCP10K, VCM10K, CLM10KC, CLM12KC, CMCP10K, CMCM10K	N/A	11-7/8 x 10	302 x 254
235000605	SXF12-1, SHF12-1, SXF16-1, SHF16-1, ZF12-1, SXR16, SHR16, ZF16-1, STX14, STX16, STQ14, STQ16, STH14, STH16	VCD12K/1, VCM12K/1, CLM-12KC/1, CMCD12K/1, CMCM12K/1, VCD16K/1, VCM16K/1, CLM16KC/1, CMCD16K/1, CMCM16K/1, VTD14, VTD16, VTM14, VTM16	ECM11, ECD11	10-7/8 x 12	276 x 305
235000606	SXF12, SHF12, SXF16, SHF16, SXF18, SHF18, ZF16	VCP12K, VCM12K, VCP16K, VCM16K, VCD18, CLM16KC, CMCP16K, CMCM16K	ECM15, ECD15	10-7/8 x 12	302 x 305
235000607	SXF24, SXF24-1, SHF24, SHF24-1 (special order)	VCD24K/1, VCP24K, VCM24K, VCM24K/1 (special order)	N/A	16-3/8 x 16	416 x 406
235000608	SX24, SH24 (special order)	N/A	N/A	15-1/8 x 17	384 x 432
235000638	STX6, STX8, STQ6, STQ8, STH6, STH8	VTD6, VTD8, VTM6, VTM8	N/A	8-7/8 x 10-1/4	226 x 261
235000639	STX10, STX12, STQ10, STQ12, STH10, STH12	VTD10, VTD12, VTM10, VTM12	N/A	10-7/8 x 11-1/2	276 x 293
235000700	N/A	N/A	ECD6	7-7/8 x 9	200 x 229
235000703	N/A	N/A	ECD10, ECD16	10-7/8 x 12	276 x 305

¹ Please pay close attention to AC models 10, 12, and 16, and whether or not they have the suffix “-1” or “/1” in the model number. Additionally, unit filters for all 5-16K models with the suffix “-1” and “/1” unit filters are interchangeable with “-2” and “/2” units.

Decide What Size You Need

Locate the data plate on the air conditioning unit to find its model number, then use the table above to match the model number to the correct filter P/N. If the model number is not listed above, measure the unit's evaporator face and find the filter P/N in the table with matching dimensions.

Dimensions

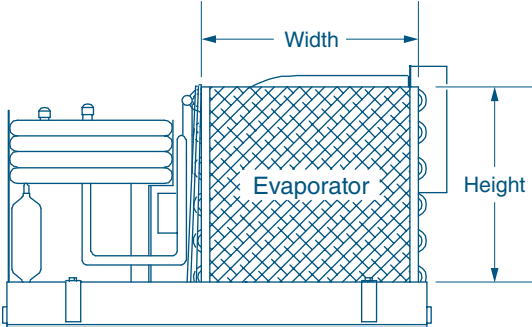

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2698 Rev. 20130621 Specifications and availability subject to change without notice.


Dealer



SmartStart™ II Soft Starter

Eliminate Boat Air Conditioning Start-Up Spikes

Reduce
Startup Amps
by 65%

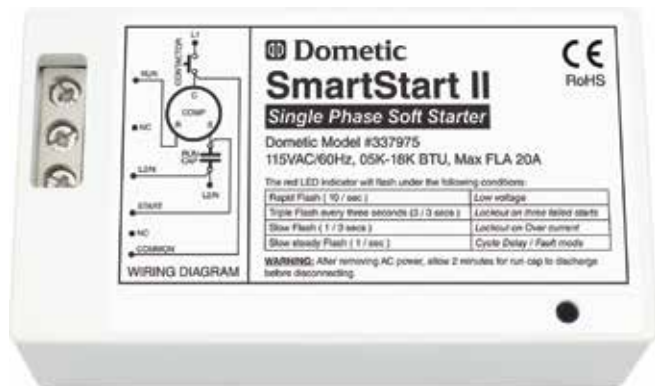

The SmartStart™ II is a unique device that smooths out startup power demand of the boat air conditioner's compressor, reducing amp requirements by up to 65%. The technology uses dynamic feedback control to reduce the inrush of current by starting the compressor motor slowly, thereby eliminating current surges that could affect the operation of an overstraining power source. No other soft starter in the industry provides better performance.


In some situations, this gentler method of handling the power surge can mean the difference between keeping the generator you have or investing thousands of dollars in a larger one. For boats without a generator, SmartStart II may allow the option of powering an air conditioning system from an inverter, and when running on dock power, it may resolve issues where the power source or connection may be weak.

Not only does the SmartStart II ease strain on the power source, it's also less stressful for the compressor itself. Additionally, it provides valuable protection by shutting down the compressor if the power source or the connection to the compressor is briefly interrupted (it will attempt a soft start after three minutes).

New to the SmartStart II is a red LED indicator that flashes codes for fault conditions that can cause SmartStart II to shut down the compressor in the event of low voltage, over current, intermittent power loss, incorrect wiring at installation, and other faults. SmartStart II also makes wiring easier with a new type of termination block.

All this power comes in a surprisingly small package. At only 5 x 3 x 2 in. (127 x 76 x 51 mm), the SmartStart II takes up little space and weighs only 15 oz. (0.43 kg.). It is wired directly into the air-conditioning system's electrical box.

SmartStart II reduces compressor startup power demand by up to 65%.

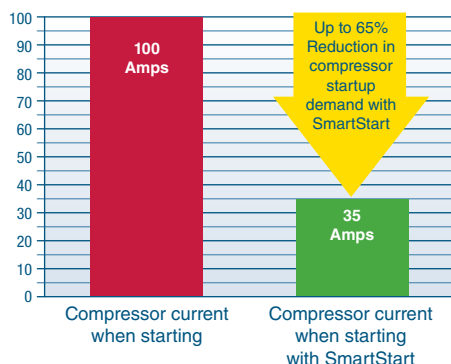

Key Benefits

- Reduces strain on the power source
- Reduces brown-out effects at compressor start-up
- May enable an inverter to power the air conditioner
- May eliminate the need to upgrade the generator
- Fault-code LED provides troubleshooting assistance
- Easier wiring with new termination block
- Inexpensive, small, and lightweight

Product Testimonial

"The generator's control circuit would trip and stop the generator due to the inrush of the Emiko's heat pump. The SmartStart reduced that inrush of current so the generator would continue to run.

We started with an inrush of 77 amps and finished with an inrush of only 20 amps. [The SmartStart] is a great solution to our problem."


— Mr. John Poole, Poole Refrigeration Service, Alameda, CA, M/V Emiko (37 ft. Nordic Tug)

Specifications for SmartStart™ II Soft Starter

Model ⁽¹⁾	337975	337976	337977
Min. Volts/Max. Volts/Cycle	115 V/50 Hz/60 Hz	208 V/240 V/50 Hz/60 Hz	208 V/240 V/50 Hz/60 Hz
Supported Comp. Capacity (BTU/h)	5000/18000	12000/30000	36000/60000
Max. FLA (A)	20	16	32

¹ Typical start surge reduction as compared to compressor locked rotor amperage (LRA) is 65%

Dimensions

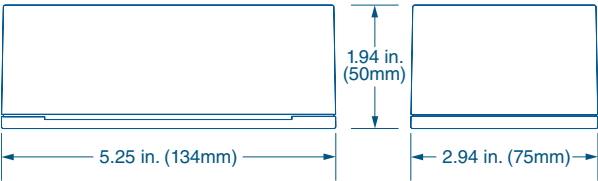


Optional SmartStart II Mounting Tray

Model #4220045 (pictured below)



Wiring Diagram

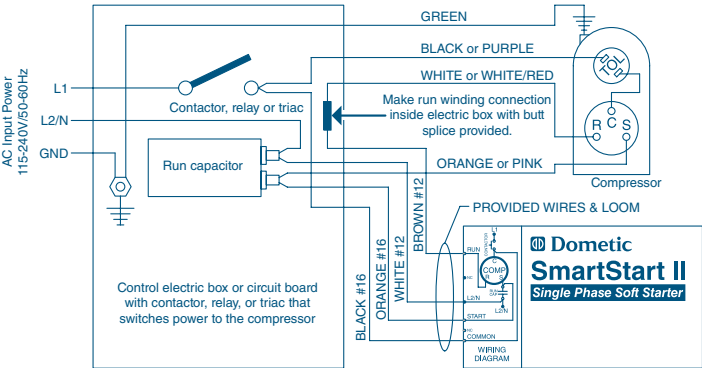

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3486 Rev. 20150403 Specifications and availability subject to change without notice.

Dealer



NEW

WhisperFan Controller

Silences Noisy AC-Driven Blower Motors



The WhisperFan Controller eliminates the noise generated by AC-driven blower motors at low fan speed settings. In addition, it provides overload protection to the blower motor and lets you precisely control the actual fan speed for each fan-speed setting (e.g. High, Medium, Low).

This electrical device uses pulse width modulation to make any AC-driven fan as quiet as a DC-driven fan. Simply install it in line between the electrical box and the blower. By pulsing the voltage hundreds of times faster than is possible with triacs, the smoother motor current results in quieter, extreme low-noise output across all fan speeds.

The WhisperFan Controller also provides more versatile fan-speed control. Want a more noticeable difference between your fan's medium speed and its high speed? The WhisperFan's two-button keypad allows you or an installer to specify the exact speed for all your fan speed settings. Further fine tuning can be done later from your cabin control's keypad (e.g. Cruisair Qht or Marine Air Systems Elite).

The WhisperFan works with all Cruisair and Marine Air cabin controls (Q-Logic, Passport, and SMXII) and with any AC blowers on either chilled water or direct expansion air conditioning systems.

The WhisperFan Controller is an easy and economical solution for an existing blower installation that may be too noisy. It's also great for anyone who wants to make precise adjustments to the fan-speed settings.

The WhisperFan Controller works with blowers up to 3 amps. WhisperFan can only support a single blower, so you must use one per fan.



The WhisperFan Control two-button keypad allows the boat owner or installer to adjust fan speed settings.


Key Benefits

- Eliminates blower motor noise associated with low fan speeds
- Makes AC-driven blowers as quiet as DC-driven blowers
- User-programmable fan speeds
- Provides overload protection to blower motor
- Easy and economical solution to noisy fans
- Works with all Cruisair and Marine Air cabin controls
- Compatible with blowers up to three amps
- Supports blowers that are 115VAC/60Hz and 208-240VAC/50 or 60Hz
- Support for 115VAC/60Hz blower motors will be available soon
- CE approved


Specifications for WhisperFan Controller

Model	WhisperFan Control-115V	WhisperFan Control-230V
Height (in/mm)	3.19/82	3.19/82
Width (in/mm)	5.5/140	5.5/140
Depth (in/mm)	6.19/158	6.19/158

How the WhisperFan Control Works

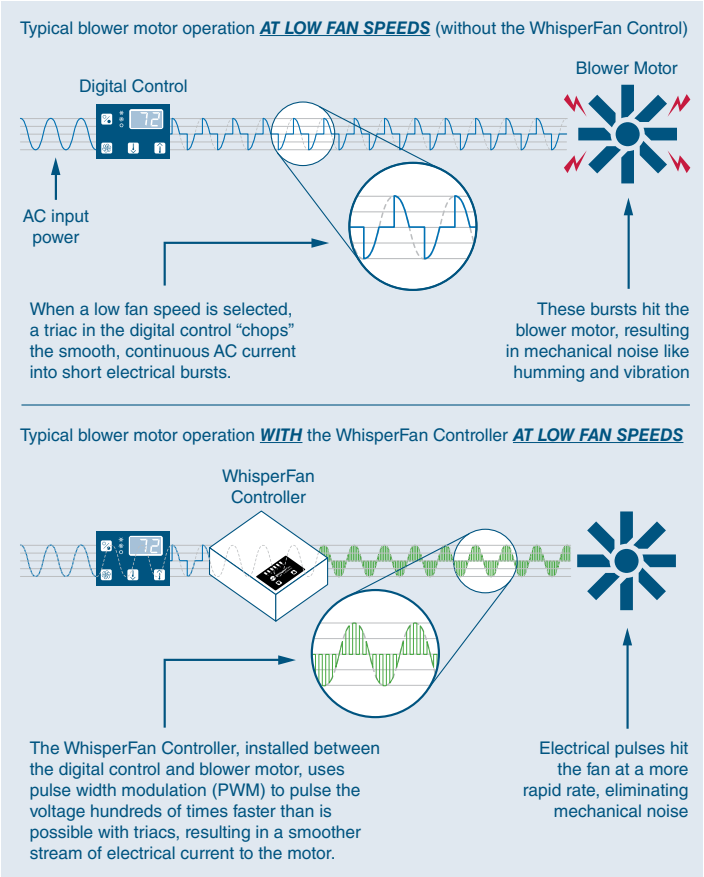

Dimensions

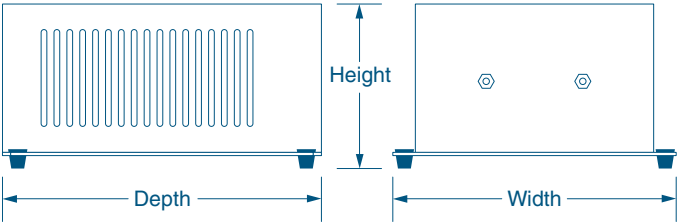

Dealer

Marine Centrifugal Seawater Pumps

Ultra-Durable Centrifugal Seawater Pumps



Clockwise from left: Air-cooled AC-5CP-MD and liquid-cooled LC-5CP-MD, LC-3CP-MD, and LC-2CP-MD

Dometic's marine centrifugal seawater pumps are an excellent choice for providing seawater circulation for marine air conditioning systems. The proven magnetic drive eliminates the troublesome mechanical shaft seal.

There is no seal wear, power-robbing friction, or leakage through the seal. The impeller and drive magnets are strong, permanent ceramic types, which prevent slippage, ensuring that full motor power is converted into pumping power.

Centrifugal pumps require a flooded inlet and should be mounted below the waterline. "LC" models have liquid-cooled motors and can be run in open air or submerged. "AC" models have air-cooled, open drip-proof motors and must be in a dry environment.

Replacement parts are available through Dometic.



Liquid-cooled models (clockwise from top): LC-5CP-MD, LC-3CP-MD, and LC-2CP-MD



Air-cooled model AC-5CP-MD

Key Benefits


- Magnetic-drive impeller means no seal to wear, leak, or repair
- Efficient motor with low power consumption
- Exclusive marine-grade base
- 115V and 230V models
- Liquid-cooled (submersible) and air-cooled motors available
- All components in contact with water are plastic, ceramic, or stainless steel
- 6 ft. (1.8 m) power cord is standard
- 1-year warranty on parts

Specifications for Marine Centrifugal Seawater Pumps

Model	LC-2CP-MD		LC-3CP-MD		LC-5CP-MD		AC-5C-MD	
Voltage (V)	115	230	115	230	115	230	115	230
Cycle (Hz) ⁽¹⁾	50/60		50/60		50/60		50/60	
Phase (Ph)	1		1		1		1	
Amps (A)	1	0.53	2	1	2.2	1.1	2.1	1
Max. Flow (gpm)	5		8.5		14.5		17	
Max. Head (ft/m)	13/3.1		19/5.8		27/8.3		27/8.3	
Ignition Protection	yes		yes		yes		no	
Motor HP (hp)	1/35		1/20		1/8		1/8	
Motor Type ⁽²⁾	TE/SUB		TE/SUB		TE/SUB		OD	
Inlet Connection (in)	3/4		3/4		1		1	
Outlet Connection (in)	1/4		1/2		1/2		1/2	
Net Weight (lbs/kg)	5/2.3		9/4.1		15.5/7.1		10/4.6	
Wet End Assembly	A-507P		A-508P		A-506LC		A-506	

¹ Standard (50/60Hz) pumps may be operated at 50Hz and reduced voltages but with a 17% reduction in flow and as much as a 30% drop in head; the LC-3CP-MD is 60Hz only and may not be operated at 50Hz.
² TE/SUB motors are totally enclosed liquid-cooled types and can be operated in the open air or submerged; OD motors are open, drip-proof and air-cooled types which must be kept dry.

Performance Curve

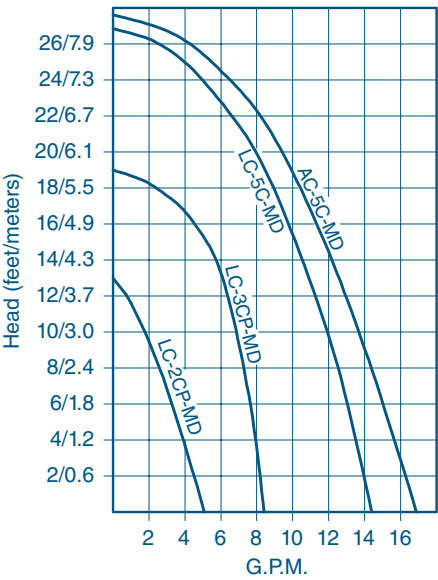

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2263 Rev. 20141219 Specifications and availability subject to change without notice.

Dealer



Seawater & Circulating Water Pumps

Reliable and Heavy-Duty Centrifugal Pumps



Left to right: PH3000BX-SP and CPOD120BX pumps shown

Marine Air specifies reliable, heavy-duty centrifugal pumps to provide a steady flow of cooling water through the air conditioning system.

The glass-reinforced polypropylene head pumps have magnetic drive impellers, and are available with submersible or air-cooled motors. Larger pumps have bronze heads with mechanical seals, and air-cooled, drip-proof motors. A wide range of pumps and motors are available for use in different power environments.

Centrifugal pumps must be mounted below the water line. Self-priming pumps are also available for above-water-line applications. A scoop type through-hull and a seawater strainer are recommended for proper operation.

When more than one air conditioning unit is served by a single pump, a separate pump relay is used. To complete the installation, Marine Air can also supply water manifolds, hose, and fittings.

Key Benefits

- High-capacity centrifugal pumps
- Quiet operation
- Low maintenance
- Single-phase motors have built-in thermal overload and ignition protection
- Three-phase ignition-protected motors
- Seawater-grade construction with glass-filled polypropylene or bronze pump heads
- Water-cooled (submersible) or air-cooled motors
- Vibration-isolation mounts reduce noise and vibration.
- High-head pressure models available
- Self-priming pumps available
- Meet or exceed applicable ABYC and US Coast Guard regulations, CE directives, and general Air Conditioning and Refrigeration (ARI) standards

Specifications for Seawater & Circulating Water Pumps

Model ⁽¹⁾	Voltage (V)	Cycle ⁽²⁾	Phase (Ph)	GPM/Feet of Head (gpm) ⁽³⁾	Ignition Protection	Motor HP (hp)	Capacity (BTU/h) ⁽⁴⁾	Inlet Connection	Outlet Connection	Height (in/mm)	Width (in/mm)	Depth (in/mm)
P800-12VDC	12	N/A	N/A	2/7	no	1/50	6000	3/8 in/10 mm	3/8 in/10 mm	3.75/96	2.81/72	5.13/131
PML150-12VDC	12	N/A	N/A	2/7	no	1/50	6000	3/8 in/10 mm	3/8 in/10 mm	3/77	2.75/70	4.5/115
PML150-24VDC	24	N/A	N/A	2/7	no	1/50	6000	3/8 in/10 mm	3/8 in/10 mm	3/77	2.75/70	4.5/115
PML250	115	60 Hz	1	3/7	yes	1/35	12000	3/4 in/20 mm	1/4 in/7 mm	4.7/120	5.6/143	6.2/158
PML250C	230	50 Hz/60 Hz	1	3/7	yes	1/35	12000	3/4 in	1/4 in	4.7/120	5.6/143	6.2/158
P900-12VDC	12	N/A	N/A	3/6.5	no	1/25	12000	1/2 in/13 mm	1/2 in/13 mm	4.5/115	3.5/89	9/229
P900-24VDC	24	N/A	N/A	3/6.5	no	1/25	12000	1/2 in/13 mm	1/2 in/13 mm	4.5/115	3.5/89	9/229
PML500	115	60 Hz	1	6/14	yes	1/50	24000	3/4 in/20 mm	1/2 in/13 mm	5.6/143	5.6/143	7.4/188
PML500C	230	50 Hz/60 Hz	1	6/14	yes	1/50	24000	3/4 in/20 mm	1/2 in/13 mm	5.6/143	5.6/143	7.4/188
PML500CK	220	50 Hz	1	6/9.5	yes	1/50	20000	3/4 in	1/2 in	5.6/143	5.6/143	7.4/188
PMA500	115	60 Hz	1	7.5/14	yes	1/2	30000	3/8 in/10 mm	3/8 in/10 mm	5/127	4/102	9/229
PMA500C	230	50 Hz/60 Hz	1	7.5/14	yes	1/2	30000	3/8 in/10 mm	3/8 in/10 mm	5/127	4/102	9/229
PMA500CK	220	50 Hz	1	5/11	yes	1/2	20000	3/8 in/10 mm	3/8 in/10 mm	5/127	4/102	9/229
PMA1000	115	60 Hz	1	12/14	yes	1/6	48000	3/8 in/10 mm	3/8 in/10 mm	6.25/159	4.5/115	9.1/232
PMA1000C	230	50 Hz/60 Hz	1	12/14	yes	1/6	48000	3/8 in	3/8 in	6.5/159	4.5/115	9.1/232
P100	115	60 Hz	1	15/16	yes	1/3	60000	3/8 in/10 mm	3/8 in/10 mm	8.5/216	8.5/216	13.9/354
P100Z	230	50 Hz/60 Hz	1	15/16	yes	1/3	60000	3/8 in/10 mm	3/8 in/10 mm	8.5/216	8.5/216	13.9/354
P120	115	60 Hz	1	21/25	yes	1/3	84000	3/8 in/10 mm	3/8 in/10 mm	8.5/216	8.5/216	13.9/354
P120Z	230	50 Hz/60 Hz	1	21/25	yes	1/3	84000	3/8 in/10 mm	3/8 in/10 mm	8.5/216	8.5/216	13.9/354
P700	115	60 Hz	1	32/21	yes	1/3	128000	3/8 in/10 mm	3/8 in/10 mm	8.5/216	8.5/216	13.9/354
P700Z	230	50 Hz/60 Hz	1	32/21	yes	1/3	128000	3/8 in/10 mm	3/8 in/10 mm	8.5/216	8.5/216	13.9/354
P710-380V/3PH	380	50 Hz	3	15/15	yes	1/2	60000	3/8 in/10 mm	3/8 in/10 mm	8/204	7.5/191	15.4/392
P700Z-3PH	230	50 Hz/60 Hz	3	32/32	yes	1/2	128000	3/8 in/10 mm	3/8 in/10 mm	8/204	7.5/191	15.4/392
P700-460V/3PH	460	50 Hz/60 Hz	3	32/32	yes	1/2	128000	3/8 in/10 mm	3/8 in/10 mm	8/204	7.5/191	15.4/392
P700Z50-3PH	220	50 Hz	3	32/21	yes	1/2	128000	3/8 in/10 mm	3/8 in/10 mm	8/204	7.5/191	15.4/392
P700-380V/3PH	380	50 Hz	3	32/21	yes	1/2	128000	3/8 in/10 mm	3/8 in/10 mm	8/204	7.5/191	15.4/392
P710	115	50 Hz/60 Hz	1	43/32	no	1/2	172000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P710Z	230	50 Hz/60 Hz	1	43/32	no	1/2	172000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P710Z-3PH	230	60 Hz	3	43/32	yes	1/2	172000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P710-460V/3PH	460	60 Hz	3	43/32	yes	1/2	172000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P710Z50-3PH	220	50 Hz	3	43/30	yes	3/4	172000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P710-380V/3PH	380	50 Hz	3	43/30	yes	3/4	172000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P711	115	50 Hz/60 Hz	1	54/42	no	1	216000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P711Z	230	50 Hz/60 Hz	1	54/42	no	1	216000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P711Z-3PH	230	60 Hz	3	54/42	yes	1	216000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P711-460V/3PH	460	60 Hz	3	54/42	yes	1	216000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P711Z50-3PH	220	50 Hz	3	54/44	yes	1	216000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P711-380V/3PH	380	50 Hz	3	54/44	yes	1	216000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P711Z-1.5HP	230	60 Hz	1	60/44	no	1 1/2	240000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392
P711Z50-1.5HP	220	50 Hz	1	60/44	no	1 1/2	240000	3/8 in/10 mm	3/8 in/10 mm	9.4/239	7.5/191	15.4/392

¹ For information about pumps larger than P711, please call the applications department at 954-973-2477.

² 50/60Hz pumps may be operated at 50Hz and reduced voltages but with a 1% reduction in flow and as much as a 30% drop in head; 60Hz only pumps may not be operated at 50Hz.

³ Head calculation required for system is dependent on number and size of unit(s), length of hose, use of 90° elbows and the height of the unit(s) above the pump. For more information, please refer to the Marine Air Systems pump sizing guide or call the app.

⁴ Determined using an average of 3 GPM per ton (12,000 BTU/hr) of air conditioning at given GPM and head, and are rated for direct expansion (DX) systems only.

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2129 Rev. 20140926

Specifications and availability subject to change without notice.



Dealer

PHD12 Pilot-House Defroster

Individual Ducts for Each Pane of Glass



Marine Air's PHD12 pilot-house defroster is designed to remove any moisture or condensation that may form on the inside of a windshield. It can be mounted horizontally or vertically under the coaming area of the pilot house or overhead.

PHD12 units operate by using electric heat that takes cabin air and raises the temperature through the use of finned heating elements mounted in the defroster chamber.

In order to accommodate the wide range of styles and number of glass areas in yachts, the PHD12 incorporates individual ducts dedicated to each pane so that all surface areas are treated. Heated air is driven through the ducts via a high-velocity blower.

Key Benefits


- Custom configuration for up to six duct ring outlets
- May be mounted horizontally or vertically
- Fan-with-heat or fan-only modes
- Lightweight marine-grade aluminum construction
- Tapered duct housing permits easy mounting and installation of ducting
- Slimline style fits easily in overhead applications or under pilot-house coaming area
- Two-part epoxy polyurethane paint resists chipping and corrosion
- Replaceable filter assembly
- Available with high-velocity blowers
- Meets or exceeds applicable ABYC and US Coast Guard regulations, CE directives, and general Air Conditioning and Refrigeration (ARI) standards

PHD12 Pilot-House Defroster Specifications

Model	PHD12HV	PHD12HVZ
Air Flow (cfm/m3h)	325/552	325/552
Voltage @ 50/60Hz 1-Ph (V)	115	230
Full Load Amps (FLA) Heat (A)	14.2	7.1
Full Load Amps (FLA) Blower (A)	1.14	0.61
Electric Heat (kW)	1.5	
Heater Amps (A)	13.0	6.5
Max. Circuit Breaker (A)	15	10
Min. Circuit Ampacity (A)	15	8
External Static Pressure (inH2O/Pa)	0.2/49	
Supply Duct Size Diameter (in/mm)	Number and diameter of duct rings is based on customer's specifications	
Supply Air Grille Area (sq. in/sq. cm) ⁽¹⁾	88/568	
Return Air Grille Area (sq. in/sq. cm)	130/839	
Net Weight (lbs/kg)	30/13.6	30/13.6
Gross Weight (in/mm)	48.5/22	48.5/22

¹ Maximum recommended free area of supply air grille(s). Cross-sectional area of the supply air ducts must be at least 58 sq. in. (374 sq. cm). Larger ducts may be needed when the total duct length exceeds 20 ft. (6 m), has more than three 90° bends, or has a transition box.

Dimensions

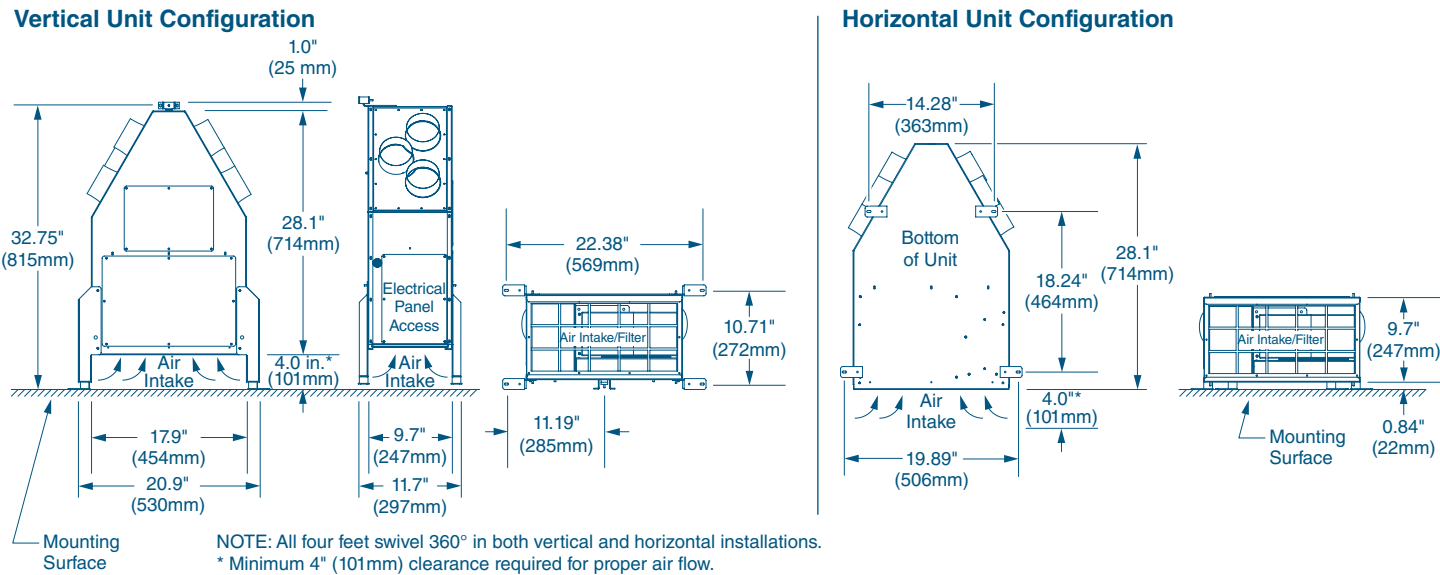

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3068 Rev. 20150213 Specifications and availability subject to change without notice.

Dealer



Variable Frequency Drives (Standard)

Smooths Out Chilled Water Compressor Startup Power Demand



A Variable Frequency Drive (VFD) completely eliminates the large starting inrush current of the compressor by ramping up voltage and frequency in a controlled time period. This allows running on limited dockside power, and also protects the generator from overload.

In addition to eliminating inrush, the VFD will also run a 60Hz rated compressor at 60Hz even when input power is 50Hz, which allows full BTU capacity performance (230V only). The drive also protects the compressor by monitoring input voltage and output current, and will shut down if a problem is detected. On 208/230V systems, the VFD can “convert” single-phase input power to 3-phase output; however, the VFD current capacity must be derated (see table on second page).

The VFD unit produces a modified sine wave output for smooth acceleration and running, with precise frequency resolution. It is designed to operate in extreme environments, such as an engine room. However, the enclosure is ventilated, and must be kept dry. Any direct water contact can damage the unit.

Built-in noise filters are standard and the VFD is CE approved. The Schneider Electric Altivar 312 VFDs incorporate a class A EMC filter into their design. This helps prevent high frequency noise from affecting the AC power supply to which the drives are connected. If you have an application or a power system that requires even lower noise emission, then we recommend you purchase the class B EMC filters specifically designed to fit with the entire family of Altivar 312 VFDs. To reduce the harmonic distortion caused by the VFD, we recommend you purchase a line reactor sized appropriately for the particular VFD.

An LED display allows the user to monitor operation and faults. The VFD is pre-programmed from the factory and no further setup is required. Power cables are available through special order.

How to choose the right size Variable Frequency Drive:

- Chiller compressor must be 3 phase and each compressor requires a dedicated VFD.
- Multiply the chiller's reverse cycle amps by 1.10 (10% safety factor).
- Choose the VFD from the Comp Voltage and Max AMP Rating columns (in the table on the following page) depending on compressor voltage and the phase of the input power supply, respectively.

Key Benefits


- Eliminates compressor start-up in-rush current
- 208/230V three-phase output with one- or three-phase input
- Full 60Hz capacity even at 50Hz input (230V only)
- Low electronic noise
- CE approved
- 380/460V three-phase models available

Specifications for Variable Frequency Drives (Standard)

Model ⁽¹⁾	VFD SQD17.5A 230V	VFD SQD27.5A 230V	VFD SQD33A 230V	VFD SQD54A 230V	VFD SQD66A 230V	VFD SQD9.5A 460V	VFD SQD14.3A 460V	VFD SQD17A 460V	VFD SQD27.7A 460V	VFD SQD33A 460V
Reference Number	4251104	4251105	4251106	4251110	4251111	4251108	4251112	4251202	4251109	4251201
Compressor Voltage (V) ⁽²⁾	208/230	208/230	208/230	208/230	208/230	380/460	380/460	380/460	380/460	380/460
Max. Amps @ 3-PH. Input (A)	17.5	27.5	33	54	66	9.5	14.3	17	27.7	33
Max. Amps @ 1-PH. Input (A)	10.1	15.9	19.1	31.2	38.1	N/A	N/A	N/A	N/A	N/A
Height (in/mm)	7.2/183	9.1/232	9.1/232	13/331	13/331	7.2/183	9.1/232	9.1/232	13/331	13/331
Width (in/mm)	5.5/140	7.1/181	7.1/181	9.7/247	9.7/247	5.5/140	7.1/181	7.1/181	9.7/247	9.7/247
Depth (in/mm)	5.9/150	6.7/171	6.7/171	7.5/191	7.5/191	5.9/150	6.7/171	6.7/171	7.5/191	7.5/191

¹ For programmed VFDs, please call your sales representative with the reference number and programming information (output voltage, input phase, and output frequency).
² 208-230V models will perform at 60Hz output even with 50Hz input, allowing 60Hz compressors to perform at full capacity in 50Hz systems. High-voltage 380-480V models can be used at 380-420V 50Hz or 440-480V 60Hz, and output frequency should match the input.

Dimensions

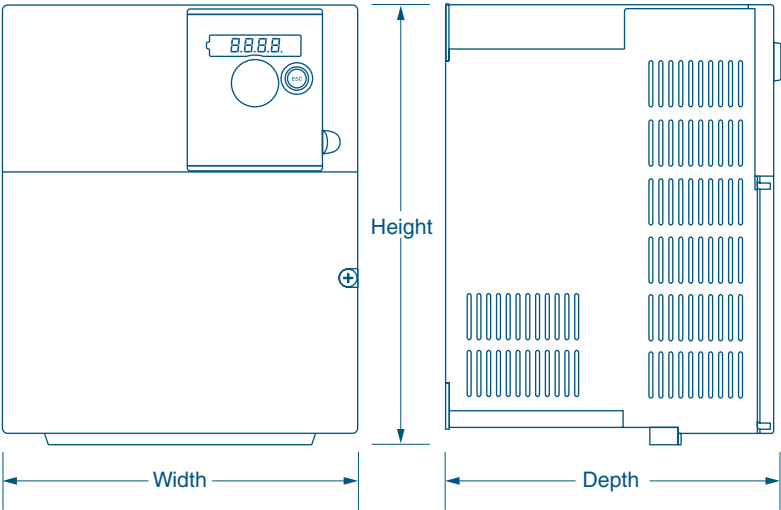

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2413 Rev. 20130920 Specifications and availability subject to change without notice.

Dealer



Pump Packages for Chilled Water Systems

Convenient Solutions for Simpler Chiller Installations



Pump packages reduce the installation time of chilled water systems by combining several necessary components in one convenient package. The packages include a chilled-water pump, expansion tank, pump drain pan, dual-scale (psi/kPa) pressure gauge, and fill assembly. The fill assembly includes a hose connection, ball valve, and pressure-reducing valve.

The cushion of air in the expansion tank allows the water to expand and contract with temperature fluctuations. This relieves pressure that might otherwise result in leaks.

The latest design includes a bladder-style expansion tank. Without the bladder, air in the expansion tank would gradually dissolve into the water and be bled off. Eventually, the protective cushion of air would be gone.

The pressure gauge is connected to an inlet pipe on the pump for the most accurate reading of system return water pressure.

Key Benefits

- Convenient packaging of multiple essential components simplifies installation
- Expansion tank protects against thermal expansion
- Bladder-style expansion tank protects against loss of air cushion
- Dual-scale pressure gauge is convenient for US and international customers
- Pressure gauge connected to inlet pipe gives most accurate reading


Specifications for Pump Packages for Chilled Water Systems

Model ⁽¹⁾	PMA1000			P700		P120	
Voltage (V)	115	230	240	115	230	115	230
Cycle (Hz)/Phase (Ph)	60/1			60/1		60/1	
Total Air Handler Capacity (BTU/h)	16000 - 23000			49000 - 120000		24000 - 48000	
Inlet Connection (in)	1/2 /MPT			1 /FPT		1 /FPT	
Outlet Connection (in)	1 /FPT			1 1/4 /FPT		1 1/4 /FPT	
Height (in/mm) ⁽²⁾	9.2/234			9.5/242		9.2/234	9.5/242
Width (in/mm)	12.9/328			17.1/435		12.9/328	17.1/435
Depth-Drain Pan (in/mm)	18/458			18/458		18/458	
Max. Depth (in/mm)	18/458			18/458		18/458	
Net Weight (lbs/kg)	33/15			49/22.3	49.25/22.4	48/21.8	
Gross Weight (lbs/kg)	47/21.4			62/28.2	69.5/31.6	62/28.2	


¹ Pump packages do NOT include a backflow preventer. If the chilled water fill assembly is fed by a potable water supply, then a reduced pressure zone (RPZ) backflow preventer should be installed between the fill assembly and the supply to prevent contamination of the potable water.
² All dimensions ± 0.125 in. (3 mm).

Dimensions

PMA1000

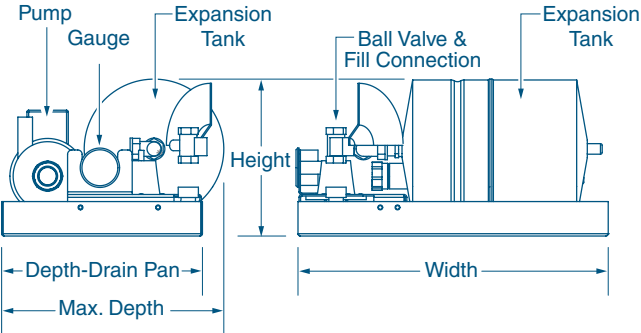

P120/P700

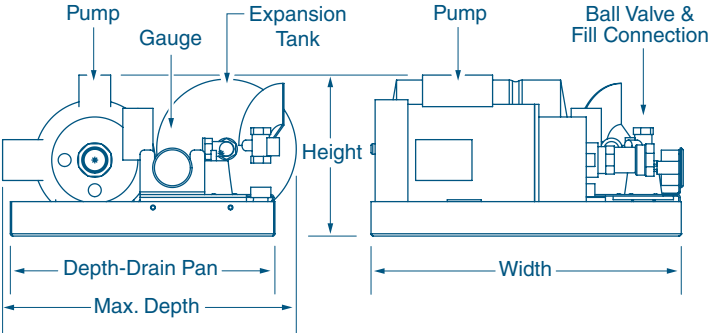

Safety Notice:

Pump packages do NOT include backflow preventers. If the chilled water fill assembly is supplied by a potable water supply, then a reduced pressure zone (RPZ) backflow preventer should be installed between the fill assembly and the potable water supply to prevent contamination of the water.

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2541 Rev. 20120824 Specifications and availability subject to change without notice.

Dealer



Air Distribution Components

Grilles, Duct, & Transition Boxes to Complete the A/C System



Supply and return air grilles are available in several wood types, painted aluminum and plastic, and come in a wide range of sizes and configurations

Marine Air and Cruisair offer supply and return air grilles in a wide assortment of dimensions, styles, and materials to complement any yacht's interior. Custom sizes, materials, and colors are available.

The louvres of supply air grilles are secured by nylon bushings for easy and dependable positioning. Return air grilles have fixed louvres. Wood return air grilles have a lint screen which can be removed for cleaning.

Round plastic supply air grilles are offered in several colors and are available with and without shut-off dampers.

Marine Air and Cruisair also offer additional air distribution components, such as duct and transition boxes, to complete the boat air conditioning system. There are two types of duct available: round/wire with woven fabric and round/wire and mylar fabric shell with 1.0 in. (25 mm) thick insulation. A full range of diameters and lengths are available, and all duct attaches easily to duct rings, grilles, and transition boxes.

Transition boxes come in two styles: Fully-insulated aluminum construction and vacuum-formed ABS plastic. Aluminum boxes come in standard and custom sizes and are ideal for applications where space is limited. ABS boxes are off the shell and feature insulated mounting pads and a unique stepped-ring design for flexibility.



Flexible duct is available in a wide range of diameters and lengths.



Vacuum-formed ABS transition boxes have insulated mounting pads and a stepped duct ring design.



Aluminum transition boxes are available in standard and custom sizes and configurations.

Key Benefits

- Supply and return air grilles available in aluminum, plastic, and wood construction in a wide range of sizes and configurations
- Grilles are available in custom finishes, colors, and sizes
- Wood return air grilles have pop-out louvres and easy-to-clean filters
- Wood return air grilles have pop-out louvres and easy-to-clean filters
- Wood supply air grilles have double-deflection, moveable louvres available in anodized bronze or aluminum finish
- Aluminum return air grilles have durable fixed-vane louvres and are available with or without filters
- Aluminum supply air grilles have adjustable louvres to direct air flow
- Durable polyurethane paint finishes available with aluminum grilles
- Transition boxes available in aluminum or vacuum-formed ABS plastic construction and do not restrict airflow
- Aluminum t-boxes are full insulated and ideal for applications where space is limited; standard and custom sizes
- ABS t-boxes have insulated mounting pads and a unique stepped ring design for flexibility

Grille Sizing by Air Handler BTU/hr Capacity

Capacity (BTU/hr)	Return Air Grille Size (sq. in./sq. cm)	Supply Air Grille Size (sq. in./sq. cm)	Duct Ring Diameter (in./mm)
4000	64/413	32/206.5	4/102
6000	70/451.6	35/225.8	4/102
9000	98/632.3	49/316	6/152
10000	100/645.2	60/387	6/152
12000	130/838.8	70/451.6	6/152
18000	200/1290.4	100/645.2	7/178
24000	240/1548.5	140/903.3	9/229
36000	360/2322.7	196/1264.6	10/254

Return and Supply Air Grilles

Wood Grilles

- Cut-out dimensions are equal to the grille's nominal height and width.
- Outside frame dimensions are 0.9375 in. (± 0.0625) (24 mm (± 2 mm)) larger than nominal grille size.
- Grille depth, as measured from back of frame: Primary supply air grilles (VH models) are 1.375 in. (35 mm), secondary closeable supply air grilles (VML models) are 1.875 in. (48 mm), and return air grilles (RA models) are 0.875 in. (22 mm).
- Frame (flange) dimensions are 0.563 (14 mm) on all sides.

Aluminum Grilles

- Cut-out dimensions for supply air grilles (TH and TV models) and return air grilles without filter (TRA) are 0.375 in. (10 mm) smaller than nominal grille size. Cut-out dimensions for return air grilles with filter (TRAF models) are 0.125 in. (3 mm) smaller.
- Outside frame dimensions for all aluminum grilles are 0.875 in. (22 mm) larger than nominal grille size.
- Grille depth, as measured from back of frame: Supply air grilles are 0.875 in. (22 mm) and return air grilles are 1.0 in. (25 mm).
- Frame (flange) dimensions are 0.625 in. (16 mm) on all sides.

Plastic Grilles (Circular)

- Cut-out dimensions are 2.0 in. (51 mm) for 2SA models (2 in. duct), 3.0 in. (76 mm) for 3SA models (3 in. duct), and 4.0 in. (102 mm) for 4SA models (4 in. duct).
- Grille depth, as measured from back of frame: 2SA models are 1.31 in. (33 mm), 3SA models are 2.16 in. (55 mm), and 4SA models are 2.38 in. (60 mm).
- Frame (flange) diameter is 2.75 in. (70 mm) for 2SA models, 3.875 in. (98 mm) for 3SA models, and 5.50 in. (140 mm) for 4SA models. A special adapter is available to use with the 4SA for 3.0 in. (76 mm) duct.

Transitions

Vacuum-Formed Transitions

- Opening dimensions are 0.375 in. (10 mm) larger than the transition size.
- Flange-to-flange dimensions are 1.5 in. (38 mm) larger than the transition size.
- Depth, as measured from back of flange: 4.0 in. (102 mm) for 4x models, 4.5 (114 mm) or 5.75 in. (146 mm) for 5x and 6x models with round or obround duct rings, respectively.
- Flange dimensions are 0.5625 (143 mm) on all sides.

Square Vacuum-Formed Transitions

- Available in 5.25 in. (134 mm) and 6.25 in. (159 mm) square.
- Opening dimensions are 0.5 in. (13 mm) larger than the transition size.
- Flange-to-flange dimensions are 1.75 in. (44 mm) larger than the transition size.
- Depth is 0.125 in. (3 mm) more than the transition size.
- Flange dimensions are 0.625 in. (16 mm) on all sides.

Vacuum-Formed Transition Boxes

- Height, with mounting flange, for 10,000, 12,000, and 16,000 t-boxes is 7.875 in. (200 mm); 7,000 t-box is 6.875 in. (175 mm).
- The 10,000, 12,000, and 16,000 t-boxes accommodate 6 in. (153 mm), 5 in. (127 mm), and 4 in. (102 mm) duct rings on one side and 5 in., 4 in. and 3 in. (76 mm) duct rings on the other side.
- The 7,000 t-box accommodates 5 in. (127 mm) and 4 in. (102 mm) duct rings on one side and 4 in. and 3 in. (76 mm) duct rings on the other side.

Aluminum Transitions

- Opening dimensions are 0.25 in. (7 mm) larger than the transition size.
- Flange-to-flange dimensions are 1.75 in. (44 mm) larger than the transition size.
- Depth of aluminum transitions is 0.25 in. (7 mm) more than the diameter of the largest round ring, as measured from the back of the flange.
- Flange dimensions are 0.75 in. (19 mm) on all sides.

Obround (OB) Ring Dimensions

- 3 in. ABS (76 mm) OB = 3.875 x 1.625 in. (95 x 42 mm), 2 in. (51 mm) depth
- 4 in. ABS (102 mm) OB = 5.125 x 2.25 in. (130 x 58 mm), 2 in. (51 mm) depth
- 5 in. ABS (127 mm) OB = 6.5 x 2.625 in. (165 x 67 mm), 2 in. (51 mm) depth
- 6 in. ABS (153 mm) OB = 7.438 x 3.375 in. (189 x 86 mm), 2 in. (51 mm) depth
- 7 in. ABS (178 mm) OB = 9.0 x 3.625 in. (223 x 92 mm), 2 in. (51 mm) depth
- 8 in. aluminum (204 mm) OB = 9.25 x 5.0 in. (235 x 127 mm), 2 in. (51 mm) depth

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



Dometic EnviroComfort Retrofit Kits (R-410A)

Climate Control At the Touch Of a Button



Enjoy ideal temperatures on your boat year-round with EnviroComfort (ECD) self-contained air conditioning kits, now available with R-410A refrigerant, an environmentally safe gas.

ECD R-410A kits are available in 6,000, 10,000, and 16,000 BTUs of cooling and heating so you can size the system to suit your boat for ultimate comfort in a range of climates.

All units have high-velocity blowers with internal motors for a more compact installation footprint. The blower can be rotated to a horizontal or vertical position for greater installation flexibility. Units are built on an easy-to-plumb stainless-steel drain pan, and the pre-installed return-air filter is removable for cleaning.

ECD units are operated by a compact digital control/display (included) that features a bright green LED and large buttons. For added installation convenience, the plastic electrical box can be mounted remotely.

ECD kits are ideal for replacing an existing air conditioning system or for a new air conditioning installation. The Retrofit Kit includes the ECD self-contained air conditioning unit and digital control with bezel and is intended to replace an older self-contained air conditioner of comparable capacity. The ECD6K will replace a 5,000 to 7,000 BTU/hr unit; the ECD10K will replace an 8,000 to 11,000 BTU/hr unit; and the ECD16K will replace a 12,000 to 16,000 BTU/hr unit.

The Installation Kit includes all air distribution and plumbing components that, when combined with the Retrofit Kit, comprises an entirely new air conditioning system installation that is suited for treating one interior space. If air conditioning a second interior space is desired, add the Dual Duct Kit which includes a "Y" duct ring connector, 12.5 ft. (3.8 m) of flexible insulated duct, and a circular supply air grille.



The ECD Installation Kit includes all air distribution and plumbing components that, when combined with the ECD Retrofit Kit, comprise a complete air conditioning system installation.



The optional Dual Duct Kit will air condition an additional interior space.

Key Benefits

- High velocity, rotatable blower for horizontal or vertical installation
- Environmentally safe R-410A refrigerant
- Compact Dometic digital display/control
- Plastic remote electrical box for convenience in mounting
- Stainless-steel drain pan
- Pre-installed return-air filter, easily removable and cleanable
- Small, compact, space-saving design
- Retrofit Kit includes digital control and replaces an existing self-contained air conditioning unit
- Optional Dual Duct Kit for air conditioning an additional interior space
- Available in 6,000, 10,000, and 16,000 BTU/hr capacities

Specifications for Dometic EnviroComfort Retrofit Kits (R-410A)


Model	ECD6K-410A	ECD10K-410A	ECD16K-410A	
Part Number (P/N)	207500306	207500310	207500316	207500017
Capacity (BTU/h)	6000	10000	16000	
Voltage (V)	115	115	115	230
Cycle (Hz)/Phase (Ph)	60/1	60/1	60/1	
Full Load Amps (FLA) Cool (A)	4.6	7	10.5	5.1
Full Load Amps (FLA) Heat (A)	5.9	9.1	13.7	6.6
Locked Rotor Amps (LRA) (A)	36	42	62	34
Max. Circuit Breaker (A)	15	25	40	20
Min. Circuit Ampacity (A)	12	16	25	12
Refrigerant Type	410A	410A	410A	
Height (in/mm) ⁽¹⁾	11.25/286	13.25/337	13.5/343	
Width (in/mm) ⁽¹⁾	16/407	20/508	20/508	
Depth (in/mm) ⁽²⁾	9/229	9.63/245	11.25/286	
Min. Supply Duct Size (in/mm) ⁽¹⁾	4/102	6/153	6/153	
Seawater Inlet Connection (in/mm)	3/8 /16	3/8 /16	3/8 /16	
Net Weight (lbs/kg) ⁽¹⁾	38/17.3	57/25.9	64/29.1	67/30.4
Height-Electrical Box (in/mm)	8.75/223	8.75/223	8.75/223	
Width-Electrical Box (in/mm)	6.5/166	6.5/166	6.5/166	
Depth-Electrical Box (in/mm)	2.77/71	2.77/71	2.77/71	

¹ All dimensions ± 0.30 in. (8 mm).


Part Numbers for ECD Kits

Kit Type	6,000 BTU/hr	10,000 BTU/hr	16,000 BTU/hr
Retrofit Kit	207500306	207500310	207500316
Installation Kit	218000106	218000110	218000116
Dual Duct Kit	226600094	226600092	226600092

Dimensions

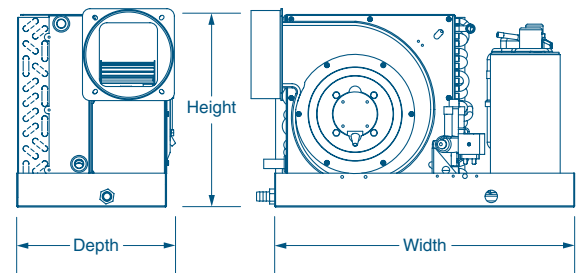

Installation

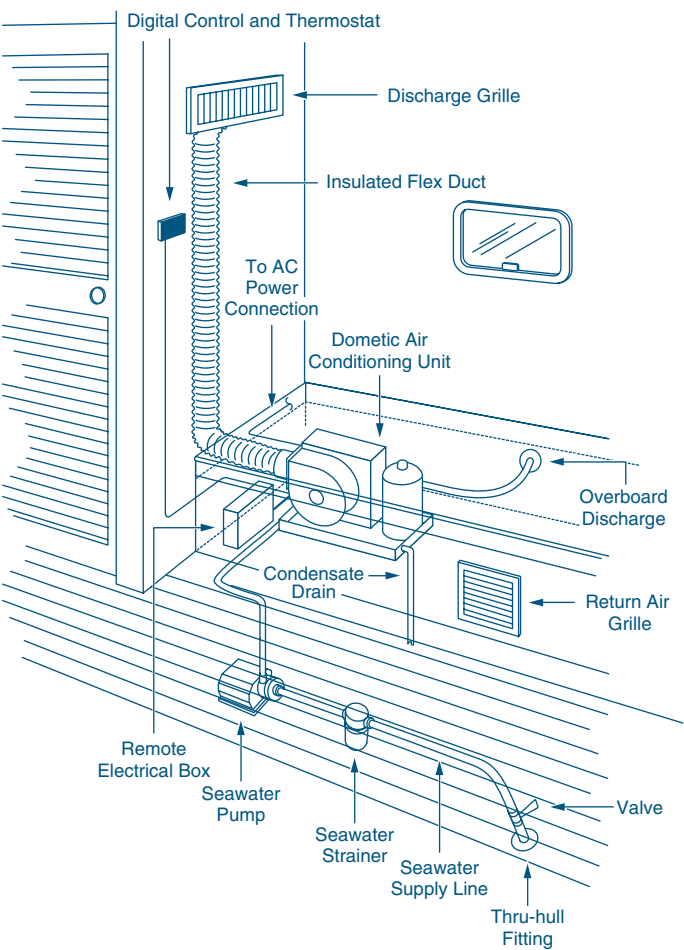

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



DuraSea Rooftop Air-Cooled Air Conditioner

Drop-In Cooling Unit That Requires No Plumbing or Ducting



DuraSea Rooftop air conditioners are built to endure harsh marine environments. Ideal for patrol boats, house boats, and other vessels, they are designed to be installed on a flat deck or rooftop and cool the area directly below. They are air cooled and require no plumbing or ducting.

The air-distribution box (ADB), sold separately, attaches to the underside of the unit. Accessible from the interior cabin, the ADB contains the thermostat, fan controls, return-air vent and two supply-air vents that blow in opposite directions for increased cooling capability. The three-speed blower works in cooling and ventilation-only modes.

Both the condenser and evaporator coils are coated using the ElectroFin® E-coat process which provides superior resistance to salt-air corrosion and UV damage when compared to spray coating. E-coat employs electrically charged molecules to coat the components for complete and uniform coverage with no material bridging between the fins. The E-coat material was salt-spray tested for 5,000 hours, not 1,000 like competing units. In addition, the condenser and evaporator fans are also corrosion resistant and will not rust. Unlike the competition, we use oversize coils for improved performance and dehumidification.

Rugged and strong, the DuraSea Rooftop weighs only 103 lbs. (46.7 kg). The heavy-duty reinforcement plate ties the evaporator and condenser together to minimize vibration and movement. A vibration-isolating L-bracket on the compressor and fan motor is incorporated for additional stabilization. Rubber clamps and bushings further control noise and vibration. The powder-coated base pan is 15% thicker than other models.



Key Benefits


- Air-cooled unit designed for rooftop or deckmount installation
- No plumbing or ducting required
- Provides 15,000 BTU/hr. of cooling (60Hz model only)
- Rugged and strong, yet lightweight
- High efficiency, low power consumption
- ElectroFin® E-coat process for superior resistance to corrosion and UV damage
- Vibration-free operation
- Compressor stabilization to endure extreme motion
- Three-speed high-performance fan for cooling and ventilation
- Sealed motor and bearings
- Stainless-steel fan-motor shaft
- Oversize coils for better performance and dehumidification
- Environmentally safe R-410A refrigerant
- Air distribution box (sold separately) includes mechanical control and interior panel
- Optional electric heat

Technical Specifications for DuraSea Rooftop Air Conditioner

Model	DuraSea Rooftop	
Capacity (BTU/hr)	15000	12000
Voltage/Cycle	115V/60Hz	240V/50Hz
Run Amps	15.3	7.0
Locked Rotor Amps (LRA)	66.0	28.0
Refrigerant Type	R-410A	R-410A
Height (in/mm)	13.1/334	13.1/334
Width (in/mm)	29.8/759	29.8/759
Depth (in/mm)	34.8/886	34.8/886
Net Weight (lbs/kg)	103/46.7	102/46.3

¹ All dimensions ± 0.30 in. (8 mm).
² All weights ± 10%

Dimensions

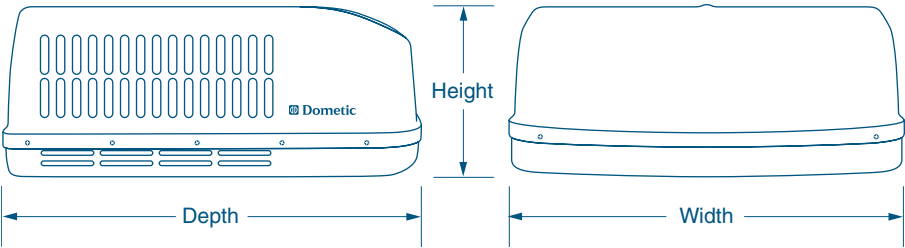

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3010 Rev. 20150109 Specifications and availability subject to change without notice.

Dealer



Exceeds
6,000 Hr. Salt-
Spray Test

DuraSea Series Air-Cooled Condensers

The Only Marinized Air-Cooled Condenser



Dometic DuraSea air conditioning condensing units are designed for maximum durability in the harshest of nautical applications. These rugged units offer long service life, exceptional performance, energy conservation, and reliability.

The DuraSea's cabinet is constructed of stainless-steel 304, which resists heavy salt-spray and also provides UV protection. Designed for deck or rooftop mounting, the optional risers elevate the unit above the mounting surface to provide excellent water drainage and protect the coil from debris and salt water. To further fortify the unit from severe marine conditions, corrosion-resistant stainless-steel fasteners are used, and all other external components have a protective coating. The control box and compressor are strategically located within the cabinet for easy service access and for extra protection against corrosion.

All DuraSea units employ scroll compressors, the latest in high-efficiency, reliable compressor technology. They reduce noise and vibration, and have a higher tolerance of liquid refrigerant and system contaminants. Scroll compressors also feature low start torque to minimize the starting-current spike that occurs with old-technology compressors. Units are available in 410A refrigerant or 417A refrigerant for retrofit of existing systems.

The new 7.5- and 10-ton sizes offer a compact footprint in an "industrial" styled equipment design that includes forklift slots and lifting eyes.



DCA60 shown with service panel removed and optional risers which protect the unit from debris.

Key Benefits

- Designed for workboats, platform, and military vessels
- Built to withstand the harsh elements of the commercial marine environment
- Operates with most evaporators
- Hermetically-sealed scroll compressor with internal overload protection
- Permanently lubricated fan motor with Ingress Protection of IP 54 or better
- High-efficiency copper tube and aluminum fin coil with dipped E-coating that exceeds 6,000-hour salt spray test
- Copper tube/copper fin coil upgrade available for the ultimate in corrosion protection
- Brass base valves with sweat connections and service ports
- Vertical fan mount design
- High- and low-pressure controls
- Heavy-duty contactor with lug connections
- Optional risers elevate the unit above the mounting surface to protect the coil from salt water and debris (3-ton to 6-ton models only)
- Optional stainless-steel 316 cabinet construction for maximum corrosion resistance

Special Options


- Nema 4 electric box
- Fan cycling control
- Three-phase monitor
- Crankcase heater

Specifications for DuraSea Series Air-Cooled Condensers

Model	DCA36D	DCA36E	DCA48D	DCA48E	DCA60D	DCA60E	DCA72D	DCA72E	DCA90D	DCA90E	DCA120D	DCA120E
Nominal Capacity (BTU/h)	36000	36000	48000	48000	60000	60000	72000	72000	90000	90000	120000	120000
Voltage (V)	230	460	230	460	230	460	230	460	230	460	230	460
Cycle (Hz)/Phase (Ph)	60/3	60/3	60/3	50/3	60/3	60/3	60/3	60/3	60/3	60/3	60/3	60/3
Run Load Amps (FLA) (A)	10.9	5	12.7	6.6	14.8	7.4	17.9	8.9	25.5	13.4	31.3	15.3
Locked Rotor Amps (LRA) (A)	95	45	120	60	123	70	160	87	235	110	267	142
Full Load Amps (FLA)	3.6	2	3.6	2	3.6	2	3.6	2	3.6	2	8.5	4.9
Blower (A)												
Max. Circuit Breaker (A) ⁽¹⁾	35	20	60	20	60	35	55	40	70	30	75	30
Min. Circuit Ampacity (A) ⁽²⁾	25	15	36	15	37	21	40	26	50	25	55	26
Min. Volts (V)/Max. Volts (V)	197/253	414/506	197/253	414/506	197/253	414/506	197/253	414/506	197/253	414/506	197/253	414/506
Refrigerant type	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
Air Flow (cfm)	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	10000	10000
Height (in/mm)	38.5/978	38.5/978	38.5/978	38.5/978	38.5/978	38.5/978	38.5/978	38.5/978	42/1067	42/1067	42/1067	42/1067
Width (in/mm)	33/839	33/839	33/839	33/839	33/839	33/839	33/839	33/839	33/839	33/839	33/839	33/839
Depth (in/mm)	33/839	33/839	33/839	33/839	33/839	33/839	33/839	33/839	48/1220	48/1220	48/1220	48/1220
Refrigerant Line Connection- Suction (in/mm) ⁽³⁾	1/2 /13	1/2 /13	1/2 /13	1/2 /13	1/2 /13	1/2 /13	1/2 /13	1/2 /13	7/8 /23	7/8 /23	7/8 /23	7/8 /23
Discharge (in/mm) ⁽³⁾	7/8 /23	7/8 /23	7/8 /23	7/8 /23	7/8 /23	7/8 /23	7/8 /23	7/8 /23	1 1/8 /29	1 1/8 /29	1 1/8 /29	1 1/8 /29
Refrigerant Line Connection- Suction (in/mm) ⁽³⁾	7/8 /23	7/8 /23	7/8 /23	7/8 /23	7/8 /23	7/8 /23	7/8 /23	7/8 /23	1 1/8 /29	1 1/8 /29	1 1/8 /29	1 1/8 /29
Sound Level (dB) ⁽⁴⁾	84	84	84	84	84	84	84	84	84	84	87	87
Net Weight (lbs) ⁽⁵⁾	290	290	310	310	365	365	375	375	475	475	525	525

¹ Must use time-delay fuses or HACR type circuit breakers of the same size as listed
² Wire size should be determined in accordance with applicable electrical codes; extensive wire runs require larger size wires
³ Up to 50 ft. (15.2 m) in equivalent line length.
⁴ As measured 3 ft. (0.9 m) away from the condensing unit
⁵ Weight for aluminum fin condenser coil with coating

DuraSea 3- to 6-Ton Dimensions

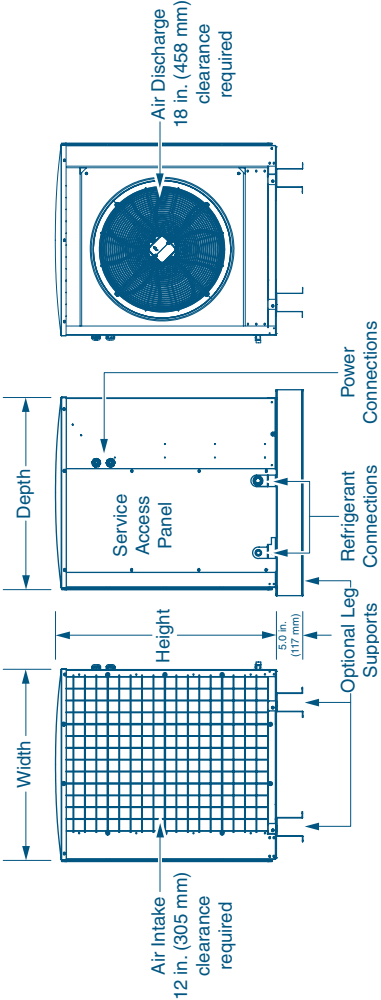

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494


INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2544 Rev. 20130222

Specifications and availability subject to change without notice.



DuraSea 7.5- to 10-Ton Dimensions

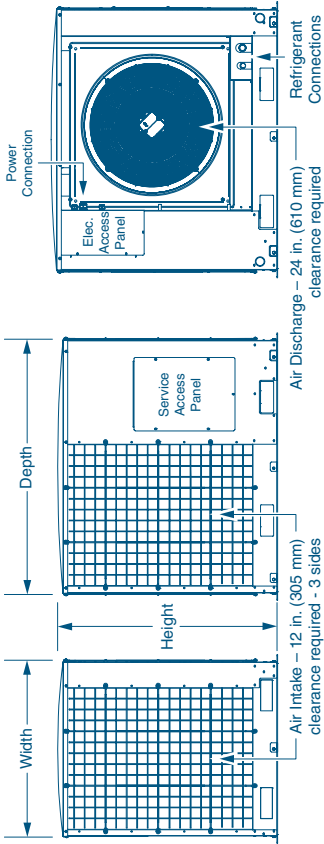

DuraSea Model Number Nomenclature

D C A 0 3 6 A 4 6 6 3 C 0 A A

DuraSea Condensing Unit
A = None
B = Nema 4x electric box and heatshrink electric connections

Refrigerant Type
A = R410A
B = R417A

Nominal Tonnage
036 = 3 Tons
048 = 4 Tons
060 = 5 Tons
072 = 6 Tons
090 = 7.5 Tons
120 = 10 Tons

Control Type
A = None (use with 24VAC thermostat)
Q = Q Control

Voltage
2361 = 230V/60Hz/1-Ph
2251 = 220V/50Hz/1-Ph
2363 = 208-230V/60Hz/3-Ph
4663 = 460V/60Hz/3-Ph
3853 = 380V/50Hz/3-Ph

Design Revision
A = Initial Rev
0 = Not used

Not Used
0 = Not used

Coil Options
A = Al Fin/Copper Tube
B = E-Coat Al/Al
C = Copper Fin/Tube

Options
A = None
B = Nema 4x electric box and heatshrink electric connections
C = Low ambient fan cycling control
D = Phase monitor
E = Valve Fan Side (VFS) standard on 7.5/10-ton models
F = Variable frequency drive
G = Crankcase heater
H = Suction accumulator
I = Reserved for future use
J = Reserved for future use
K = Combination of options B, C, D, G, and H

Dealer

Radome Environmental Control Units

Keeps Sensitive Domed Electronics Cool



Safe navigation relies on your ship's radar and communications equipment, and as with all electronics, overheating leads to equipment failure. The Radome Environmental Control Unit (ECU) is specifically designed to provide air conditioning within the dome enclosure, ensuring optimum temperatures for the critical equipment inside.

As you would expect from the world leader in marine air conditioning technology, this air-cooled unit is built for at-sea conditions. Although small and lightweight to provide ease of installation and maintenance, the Radome ECU is designed to exceed the cooling requirements of pleasure boat, commercial vessel, and military ship applications. Rugged construction with corrosion-resistant materials allows the unit to be operated in the most extreme conditions at sea.

The Radome ECU's highly efficient yet powerful rotary compressor provides quieter operation, increased reliability, and reduced amperage. Its raised-lance fin and the rifled tubing design of the evaporator and condenser coils provide maximum capacity. Three configurations are offered: interior dome self-contained, remoted ducted self-contained, and split-gas.

The Radome ECU is not limited to marine applications. It can also control the temperature and humidity levels of on-land locations such as electronics enclosures, telecommunications shelters, vaults, buildings, trailers, vans, and cleanrooms.

The Radome ECU is available in three configurations:



Split-gas configuration



Remote ducted self-contained (ideal for low pedestal applications)



Interior dome self-contained (exhaust kit is available for low pedestal applications to correct condenser air short cycling)

Key Benefits


- Three configurations available
- Compact, lightweight, and easy to install
- Air-cooled - no plumbing required
- Durable corrosion-resistant coating
- Environmentally safe R-417A refrigerant
- R-22 units can be retrofitted to R-417A to comply with global environmental regulations
- Reliable, solid-state digital control maintains ideal temperature
- Control circuitry monitors and protects the unit
- High-efficiency rotary compressor is quiet and reliable
- Raised lance fin and rifled tubing for maximum capacity
- Optional electric heat
- Charged, tested, and leak checked at the factory
- Charge Guard protection provides sealed access ports, ensuring environmental protection and chiller module integrity
- Meets or exceeds applicable ABYC and US Coast Guard regulations, CE directives, and general Air Conditioning and Refrigeration (ARI) standards

Specifications for Radome Environmental Control Units

Model ⁽¹⁾	HSA16K		
Capacity (BTU/h)	16000		
Voltage (V) ⁽²⁾	115	230	220
Cycle (Hz)/Phase (Ph)	60/1		50/1
Full Load Amps (FLA) Cool (A)	14.54	7.2	6.9
Full Load Amps (FLA) Heat (A)	9.84	TBD	
Full Load Amps (FLA) Blower (A)	2.95	1.8	
Locked Rotor Amps (LRA) (A)	54	29	32
Optional Electric Heat (kW)	1		
Max. Circuit Breaker (A)	40	20	
Min. Circuit Ampacity (A)	25	14	13
Refrigerant Type	417A		
Max. Height (in/mm)	14.5/369		
Width (in/mm)	18/458		
Max. Depth (in/mm) ⁽³⁾	30/762		
Net Weight (lbs/kg) ⁽³⁾	99/45	99.35/45.1	96/43.6
Gross Weight (lbs/kg)	215/97.6	106.25/48.2	115/52.2

¹ Specifications in this table are for the interior self-contained configuration. For information about different configurations please contact a Dometic Marine sales representative at 954-973-2477.
² 230V/60Hz unit can be operated at 200-220V/50Hz
³ All dimensions ± 0.30 in. (8 mm).
⁴ All weights ± 10%

Dimensions

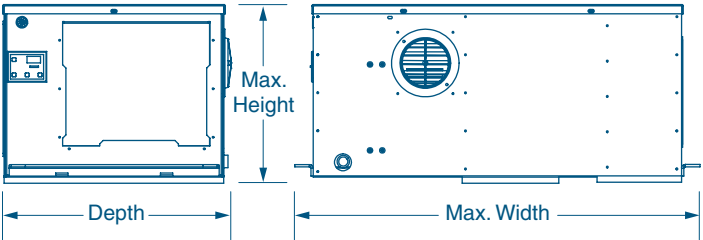

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2132 Rev. 20130927 Specifications and availability subject to change without notice.

Dealer



Eskimo Cup

Make Your Last Sip Colder Than Your First



The Eskimo Cup accommodates a variety of beverages, including a 12-oz beer, 16.9-oz water and 16-oz soda.

The Dometic Eskimo Cup is a refrigerated cup holder that can be installed in any convenient location to keep drinks refrigerator-cold (results may vary based on environmental conditions).

The Eskimo Cup makes your last sip even colder than your first. It allows boaters to keep a can, bottle or any appropriately sized beverage container chilled on even the hottest days—something that a typical cup holder or can koozie can't begin to accomplish. Simply store your drink in the Eskimo Cup between sips.

Designed as a marine-tough open-top cylinder that replaces nearly any existing standard 4-inch (102 mm) cup holder, it is large enough to fit a 20-ounce (591 ml) water or soda bottle, and also accommodates a standard-size beer or soda can. A specially angled bottom insert keeps bottles or cans in constant physical contact with the sidewall cooling element.

The Eskimo Cup is designed to accommodate mounting into surfaces of various thicknesses. A polished marine-quality 316 stainless steel trim ring finishes the surface installation and is accented with two blue LED interior lights. The aluminum interior has a corrosion-resistant, non-stick surface for easy cleaning and a built-in drain eliminates condensation, rain, and water splashes.

Beneath the installation surface, the aluminum interior is chilled by a DC-powered premium thermoelectric Peltier element and insulated for maximum effectiveness. The electronics are completely sealed and protected against water spray. The below-surface installation area requires ventilation for heat dissipation, so the area should not be fully enclosed.

Powered by the house battery, control of all the Eskimo Cups can be managed under a single switch or set up by zone. Each unit includes a low-voltage cut off to avoid a dead battery, a high-heat cut off, and an in-line fuse.

Key Benefits

- Keep drinks refrigerator-cold
- Maintains or reduces temperature of cold drinks
- Replaces most standard cup holders
- Holds bottles or cans
- Polished marine-quality 316 stainless-steel trim ring
- Two blue LED interior lights
- Mounts into surfaces of various thicknesses
- DC-powered premium thermoelectric Peltier cooling element
- Marine-tough
- Built-in drain
- Low-voltage cut off, high-heat cut off, and in-line fuse

Product Testimonial

"The Dometic Eskimo Cup is a game changer. I have a tumbler that I fill with ice and water. It fits snugly into the Eskimo Cup and it stayed cold all day long, and even had ice in it at the end of the day. Later I put a Corona bottle in there, and same thing, it stayed cold. I have one on my boat now but I'm definitely going to install another one."

— Greg Lentine, owner, 24-foot Yellowfin Bay Boat



The Eskimo Cup features two blue LED interior lights.



The Eskimo Cup's electronics are completely sealed and protected from salt spray.







Aluminum interior of the Eskimo Cup has corrosion-resistant, non-stick surface with built-in drain.

Specifications for Dometic Eskimo Cup

Part Number	Amps	Power	Height (in/mm)	Width (in/mm)	Depth (in/mm)	Interior Diameter (in/mm)	Cutout Diameter (in/mm)	Power Cord Length (in/mm)	Weight (lbs/kg)
250140101	3.1	12V DC	6.23/159	5.36/137	6.85/174	2.95/75	4.0/102	16/407	2.11/0.96

Dimensions

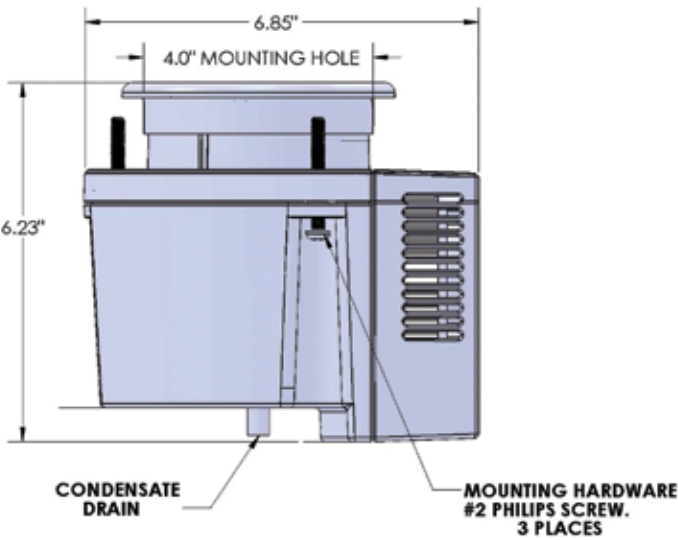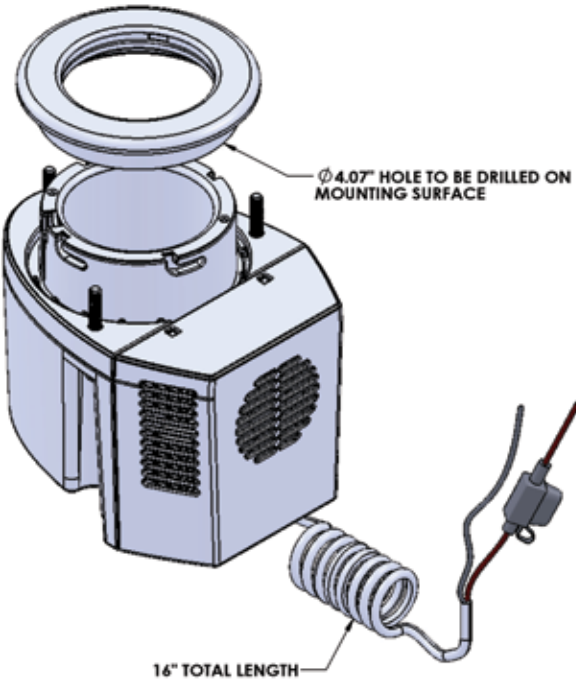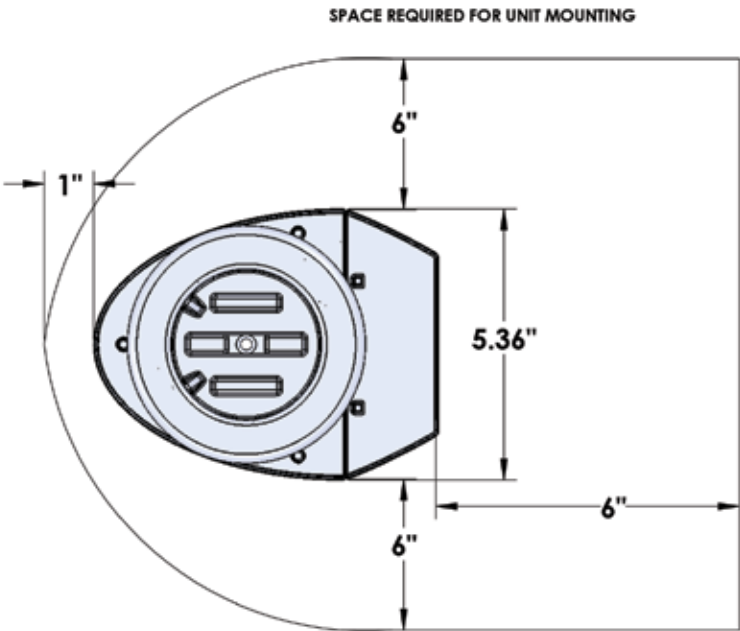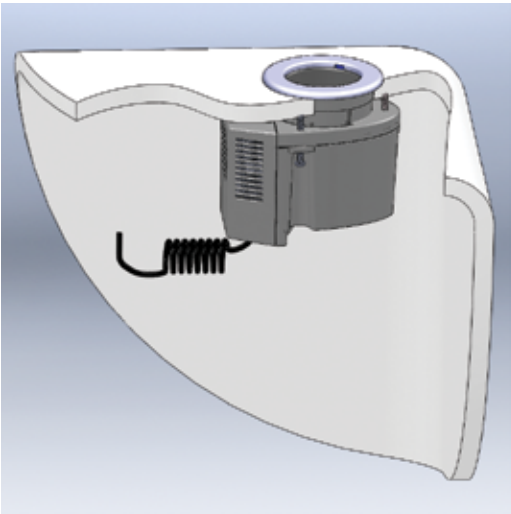

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3374 Rev. 20150410 Specifications and availability subject to change without notice.

Dealer

NEW

Eskimo Ice EI540D Fishbox Ice System

Produces Up to 540 Pounds (245 kg) of Fishbox Ice Per Day



The Eskimo Ice EI540D system produces up to 540 lbs. (245 kg) of fishbox ice per day, roughly the same output as its larger predecessor. The EI540D ice-making machine comes in a self-contained, cube-shaped package with a 16.25 x 16.25 in. (413 x 413 mm) footprint, making it ideal for boats with limited installation space but no less demand for reliable and efficient fishbox ice production.

EI540D units are easy to install. Ice is generated minutes after starting the system, and can be conveyed up to 35 ft. (10.6 m) through an ice-delivery hose to nearly any desired location on board.

The system is operated by the Smart Logic control. The control is integrated into the electrical box which can be mounted remotely for installation flexibility. Smart Logic features a full menu of sensors and status lights monitor gas pressure, auger motor, compressor, water level, ice level, and ice clogs, and will shut off the system if problems are detected.

EI540D units feature ventilated cover panels, which can be easily removed for convenient service access from any side.

The EI540D system installation kit includes one electrical box with Smart Logic keypad/display, water filter, and 35 ft. (10.6 m) of 3/4 in. (20 mm) ID ice delivery hose and insulation. This smaller diameter hose is easier to install and less likely to kink. Units are available in 115V/60Hz, 230V/60Hz, and 220V/50Hz electrical configurations. The EI540D will support an additional remotely-mountable Smart Logic keypad/display, which can be purchased separately.



The easy-to-use Smart Logic digital control monitors all system functions.



Ventilated cover panels can be removed for service access from any side.

Key Benefits

- Produces up to 540 lbs. (245 kg) of fishbox ice per day
- Thermal expansion valve increases performance for all conditions
- Compact footprint - 16.25 x 16.25 in. (413 x 413 mm)
- Available in 50Hz and 60Hz models
- Up to two remotely-mounted Smart Logic digital controls/display panels
- Photo-electric ice-level sensor
- Fresh-water filter included in kit
- Pre-charged system
- Sensors monitor all system functions
- Monitor system and restart from any Smart Logic digital control location
- Improved fresh-water float switch
- Ventilated cover panels can be removed for maintenance access from any side
- CAN-bus compatible
- Smaller 3/4 in. (20 mm) ID ice delivery hose is easier to install, less likely to kink

Product Testimonial

"It can fill a five-gallon bucket in under an hour. It doesn't get any better. Sushi quality fish all the time."

— Capt. Glenn Morgan, Carpe Momentum

"We recently installed an Eskimo Ice machine on the Big Oh and it provides us with professionally crushed ice to keep our bait and our fish fresh while we're fishing tournaments all over the world. I would not have a boat without an Eskimo Ice maker."


— Capt. Ronnie Fields, In The Bite Magazine's 2010 Captain of the Year

Specifications for Eskimo Ice EI540D Fishbox Ice System


Model	EI540D-115V	EI540D-220V	EI540D-230V
Ice Capacity Per Day (lbs/kg) ⁽¹⁾	540/244.1	540/244.1	540/244.1
Ice Capacity Per Hour (lbs/kg) ⁽¹⁾	22/9.1	22/9.1	22/9.1
Voltage (V)	115	220	230
Cycle (Hz)/Phase (Ph)	60/1	50/1	60/1
Full Load Amps (FLA) Cool (A)	10.7	5.4	5.3
Locked Rotor Amps (LRA) (A)	58.8	26.3	31
Max. Circuit Breaker (A)	30	15	15
Min. Circuit Ampacity (A)	18	10	10
Refrigerant Type	404A	404A	404A
Water Consumption Per Day/24 Hours (gpd/lpd)	64.7/244.1	64.7/244.1	64.7/244.1
Height (in/mm) ⁽²⁾	16.25/413	16.25/413	16.25/413
Width (in/mm) ⁽²⁾	16.25/413	16.25/413	16.25/413
Depth (in/mm) ⁽²⁾	16.25/413	16.25/413	16.25/413
Seawater Inlet Connection (in)	5/8	5/8	5/8
Net Weight (lbs/kg) ⁽³⁾	107/48.6	107/48.6	107/48.6
Gross Weight (lbs/kg) ⁽³⁾	128/58.1	128/58.1	128/58.1

¹ Actual capacity depends upon conditions
² All dimensions ± 0.30 in. (8 mm).
³ All weights ± 10%

Dimensions

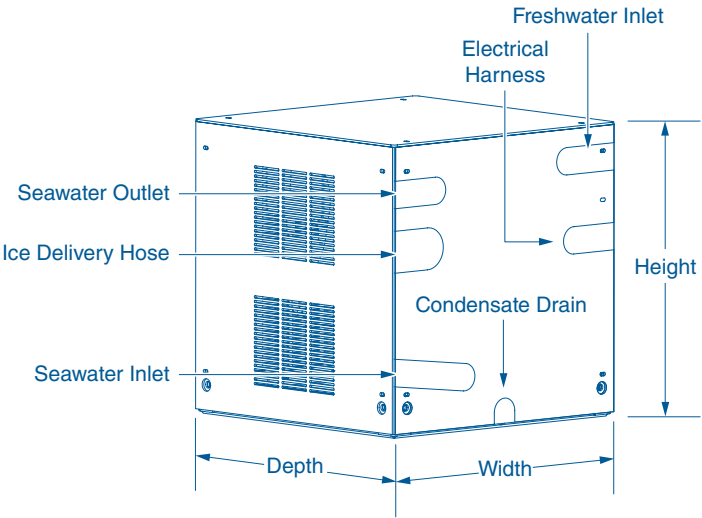

Installation

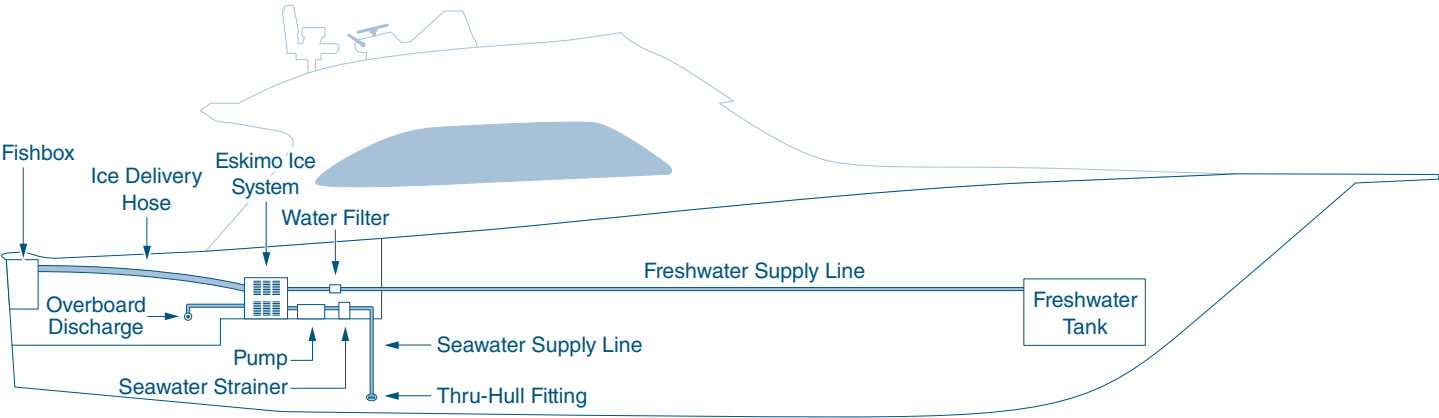

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3076 Rev. 20141010 Specifications and availability subject to change without notice.

Dealer



NEW

Eskimo Ice EI1000D Fishbox Ice System

Produces Up to 1,000 Pounds (454 kg) of Fishbox Ice Per Day



The Eskimo Ice EI1000D system produces up to 1000 lbs. (454 kg) of fishbox ice per day. That's nearly 42 lbs. (19 kg) of ice per hour! The EI1000D ice-making machine comes in a self-contained, compact package with a 21.25 x 21.25 in. (540 x 540 mm) footprint and a height of only 23.25 in. (591 mm), making it ideal for boats with limited installation space but a big demand for reliable and efficient fishbox ice production.

EI1000D units are easy to install. Ice is generated minutes after starting the system, and can be conveyed 50 to 70 ft. (15 to 21 m) depending on conditions and angle of run through an ice-delivery hose to nearly any desired location on board.

The system is operated by the Smart Logic control. The control is integrated into the electrical box which can be mounted remotely for installation flexibility. Smart Logic features a full menu of sensors and status lights monitor pressure faults, auger motor, compressor, water level, ice level, and ice clogs, and will shut off the system if problems are detected.

EI1000D units feature ventilated cover panels, which can be easily removed for convenient service access from any side. The unit has a sealed gear box and a totally enclosed fan-cooled (TEFC) motor.

The EI1000D installation kit includes one electrical box with Smart Logic keypad/display, water filter, and 50 ft. (21 m) of 3/4 in. (20 mm) ID ice delivery hose and insulation. This smaller diameter hose is easier to install and less likely to kink.

Units are available in a 230V/60Hz electrical configuration now, with a 220V/50Hz model coming soon. The EI1000D supports an additional remotely-mountable Smart Logic keypad/display, which can be purchased separately.



The easy-to-use Smart Logic digital control monitors all system functions.



Ventilated cover panels can be removed for service access from any side.



Special cylindrical ice shape maximizes ice density for greater cooling.

Key Benefits

- Produces up to 1,000 lbs. (454 kg) of fishbox ice per day
- Conveys ice 50 ft. (15 m) through insulated delivery hose
- Thermal expansion valve increases performance for all conditions
- Compact footprint - 21.25 x 21.25 in. (540 x 540 mm)
- Available in 230V 60Hz; 220V 50Hz model coming soon
- Up to two remotely-mounted Smart Logic digital controls/display panels
- Photo-electric ice-level sensor
- Fresh-water filter included in kit
- Pre-charged system
- Sensors monitor all system functions
- Monitor system and restart from any Smart Logic digital control location
- Improved fresh-water float switch
- Ventilated cover panels can be removed for maintenance access from any side
- CAN-bus compatible
- Sealed gear box and TEFC motor
- Smaller 3/4 in. (20 mm) ID ice delivery hose is easier to install, less likely to kink

Product Testimonial

"Fishermen prefer the larger bits of ice. They last longer and in fact it's a lot closer to what commercial fishermen use."

— Tom Troyko, Voda Marine Service

"Plenty of ice to ice down your fish and your drink box. Eskimo Ice is the only way to go."


— Kevin Stafford, captain, 60-ft. Buddy Davis

Specifications for Eskimo Ice EI1000D
Fishbox Ice System


Model	EI1000D-230V	EI1000D-220V
Ice Capacity Per Day (lbs/kg) ⁽¹⁾	1000/454	1000/454
Ice Capacity Per Hour (lbs/kg) ⁽¹⁾	42/19.1	42/19.1
Voltage (V) ⁽²⁾	230	220
Cycle (Hz)/Phase (Ph)	60/1	50/1
Full Load Amps (FLA) Cool (A)	10.7	10.3
Locked Rotor Amps (LRA) (A)	58.8	49.7
Max. Circuit Breaker (A)	30	30
Min. Circuit Ampacity (A)	18	18
Refrigerant Type	404A	404A
Water Consumption Per Day/24 Hours (gpd/lpd)	120/454.3	120/454.3
Height (in/mm) ⁽³⁾	23.25/591	23.25/591
Width (in/mm) ⁽³⁾	21.25/540	21.25/540
Depth (in/mm) ⁽³⁾	21.25/540	21.25/540
Net Weight (lbs/kg) ⁽⁴⁾	211/95.8	211/95.8
Gross Weight (lbs/kg) ⁽⁴⁾	230/104.4	230/104.4

¹ Actual capacity depends upon conditions
² 220V/50Hz model coming soon
³ All dimensions ± 0.30 in. (8 mm).
⁴ All weights ± 10%

Dimensions

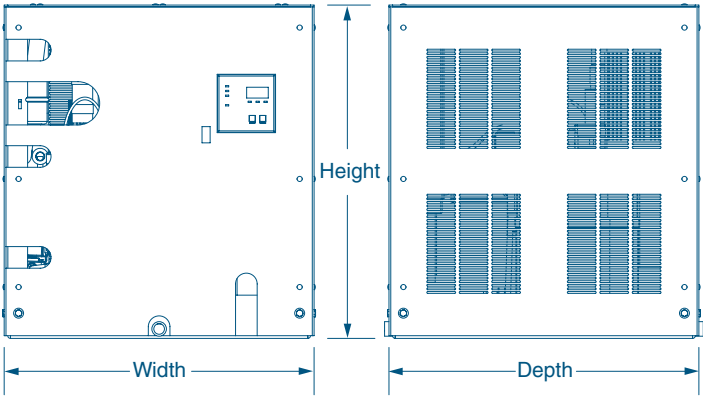

Installation

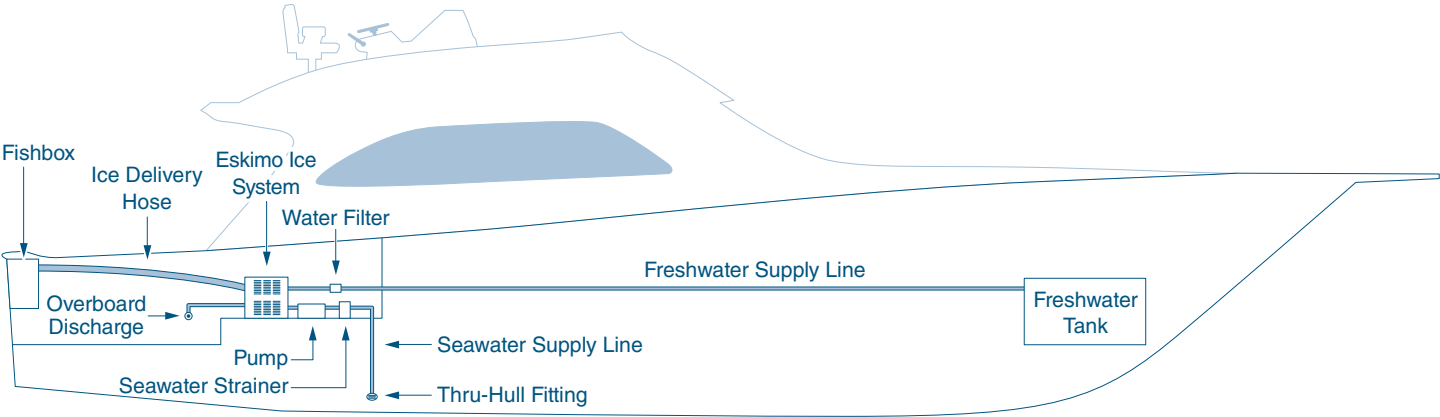

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



NEW

HZB Series Portable Ice Makers

Make Up to 33 Lbs. of Ice Every 24 Hours



The HZB-12SA, which makes 23 lbs. of ice per day, and the larger capacity HZB-15S, which makes 33 lbs. of ice per day

Dometic's HZB series of portable ice makers makes it possible to have ice where and when you need it.

Efficient HZB ice makers can produce up to 33 lbs. (15 kg) of ice every 24 hours. After turning on the unit, simply add fresh water, select the cube size, and the ice maker does the rest. Ice is ready about 14 minutes after turning on the unit.

HZB units can make different sized ice cubes. Cube size selection is made on the LED control panel, which also features low water and ice full indicators.

The removable basket holds up to 2.5 lbs. (1.1 kg) of ice. The basket is slotted on the bottom to allow water from the melting ice to flow back into the water reservoir for more ice production.

The energy saving clear window in the lid allows ice level checking without raising the lid and losing cold. HZB ice makers include an ice scoop, self-storing drain fitting, and is available in stainless-steel or black finish (HZB-12 only).



Select from three cube sizes on the HZB-15S LED control panel, which also indicates low water and ice full.



Select small or large cube size on the HZB-12S LED control panel, which also indicates empty water and full ice.



The removable ice basket is slotted to allow for water from melted ice to be recycled into more ice. Ice scoop is included.

Key Benefits



- HZB-15S makes up to 33 lbs. of ice every 24 hours
- HZB-12 makes up to 23 lbs. of ice every 24 hours
- Removable basket holds 2.5 lbs. (HZB-15S) or 1.8 lbs. (HZB-12) of ice
- Select different sized cubes
- Ice is ready in about 14 minutes
- Ice full and water empty control panel indicators
- Slotted ice basket allows water from melting ice to be recycled into more ice
- Automatic shutoff when water is low
- Automatic shutoff when ice basket is full
- HZB-12 is available with black finish (HZB-12A) or stainless-steel and black finish (HZB-12SA)
- Ice scoop included
- Window in lid allows ice level checking without opening the lid and losing cold
- Convenient recessed carry handles (HZB-15S only)
- 1-year warranty

Specifications for HZB Series Portable Ice Makers

Model	HZB-12 ⁽¹⁾	HZB-15S
Voltage/Cycle	120VAC/60Hz	120VAC/60Hz
Amps	1.2	3.5
Ice Production Per 24 Hours (lbs/kg)	23/10.4	33/15
Ice Basket Capacity (lbs/kg)	1.8/0.8	2.5/1.1
Water Fill Capacity (gal/l)	0.58/2.2	1.0/3.78
Height (in/mm)	12.9/328	17.0/432
Width (in/mm)	9.5/242	15.0/381
Depth (in/mm)	14.1/358	17.0/432
Net Weight (lbs/kg)	21/9.5	32/14.5
Gross Weight (lbs/kg)	25/11.3	44/19.1

¹ Use 'HZB-12A' for black finish or 'HZB-12SA' for black/silver finish.

Dimensions

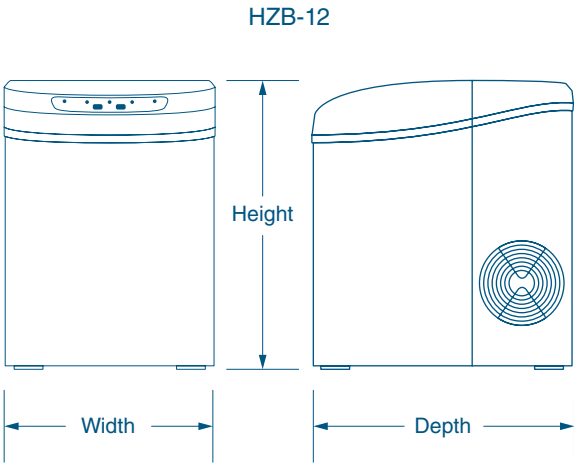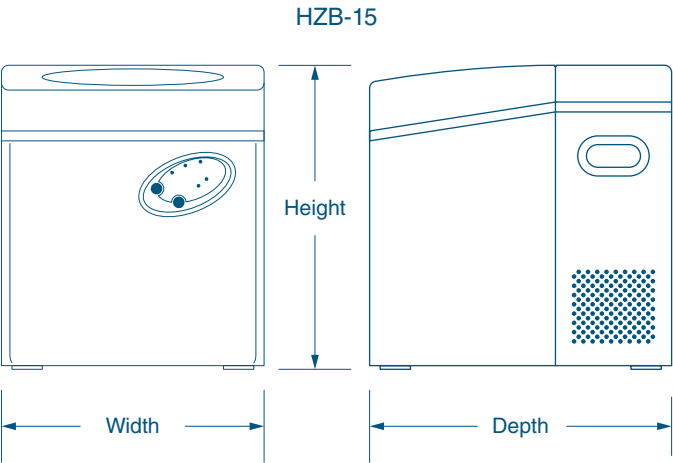

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3209 Rev. 20140815 Specifications and availability subject to change without notice.

Dealer



NEW

Dometic Spot Zero ZTC Water Purifier Systems

Featuring Color Touchscreen & Remote Control via the Internet



Dometic Spot Zero ZTC 2000Z model shown

The Dometic Spot Zero system removes 95-99% of total dissolved solids (TDS) from any dockside or on-board water supply. The result is soft, pure water for a spot-free wash down without the need to hand dry.

Fill your freshwater tanks with Spot Zero water for bathing, drinking, and crystal-clear ice.

Operation is easy and reliable. Providing true one-touch operation via the built-in 7 in. color touchscreen display, proprietary PLC software monitors and regulates all system functions automatically.

Spot Zero ZTC units also provide access via smart phone, tablet, or computer anywhere in the world using Dometic's STIIC software. No other water purifier system provides this two-way interactive intelligence.

Key Benefits

- Eliminates water spots
- Removes 95-99% of total dissolved solids
- Purifies dockside water
- Removes viruses, cysts, and bacteria
- No need to chamois-dry surfaces
- Stop wasting time drying by hand
- Extends wax and paint life
- Provides pure water for bathing and drinking
- Interactive management on smart phone, tablet, or computer via the Internet
- Free app for remote monitoring with STIIC software
- Integrated 7 in. (178 mm) color touchscreen display (NEMA 4X).
- Very low power consumption
- Very low noise and vibration
- Framed unit can be disassembled for modular installation

Special Options

- Remote 7 in. (178 mm) color touchscreen display (NEMA 4X)



Mechanical overrides for double pass and concentrate



Interactive management with integrated 7 in. (178 mm) color touchscreen




Vibration-isolation mounts reduce noise and vibration

Dometic
SPOT ZERO


Specifications for Dometic Spot Zero ZTC Water Purifiers

Model	ZTC2000Z	ZTC3000Z
Capacity Per Hour (gal/l)	85/321.8	125/473.2
Capacity Per 24 Hours (gal/l)	2,000/7,571	3,000/11,356
Amperage	7.5A @ 115V 4.0A @ 230V	7.5A @ 115V 4.0A @ 230V
Net Weight (lbs/kg)	113/51.3	133/60.3
Shipping Weight (lbs/kg)	178/80.7	198/89.8
Shipping Dimensions (H X W X D)	30 X 41.5 X 48.5 in. (762 X 1,055 X 1,232 mm)	

Dimensions

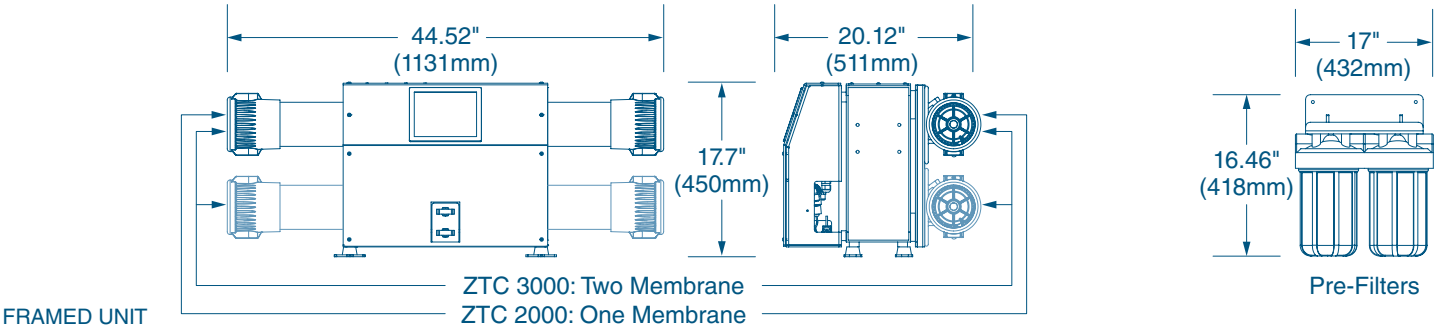

MODULAR COMPONENTS

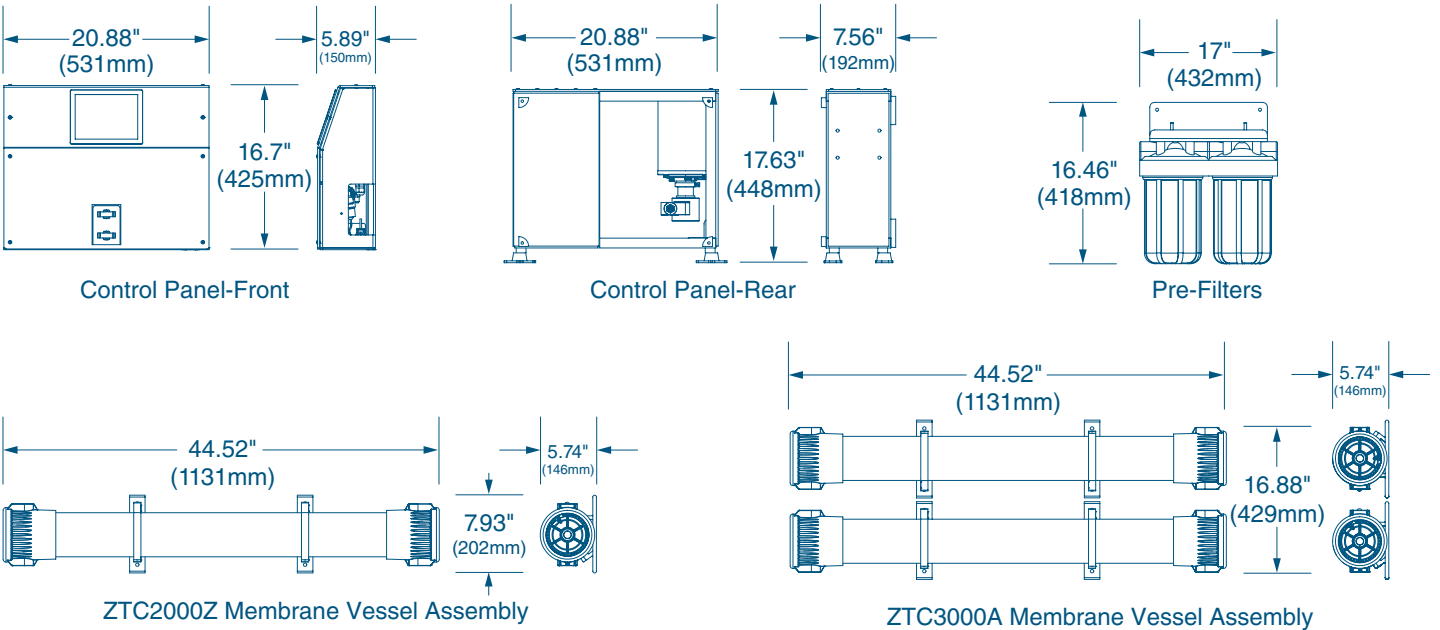

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3458 Rev. 20150306 Specifications and availability subject to change without notice.

Dealer



NEW

Dometic Spot Zero Water Purifier Systems

Spot-Free Washing



Dometic Spot Zero SZ3000 modular components: Control panel with flow meters and pressure gauges, pre-filters, and membrane vessel assembly

Imagine a gleaming boat and a spot-free wash down with no need to go back and wipe or chamois-dry the vessel's finished surfaces.

The Dometic Spot Zero removes 95-99% of total dissolved solids (TDS) from any dock or on-board water supply. The result is soft, pure water that lets water-sprayed surfaces dry clean without leaving spots that have to be wiped away. Air-drying after a Spot Zero rinse helps preserve the boat's paint and wax finishes since "wiping away" dissolved solids can grind them into finished surfaces, creating minute scratches.

Fill your holding tanks with Dometic Spot Zero water to be used for bathing, cooking, drinking, and making crystal-clear ice on-board. Enjoy spot-free glassware, dishes, and shower surfaces, and eliminate mineral build-up in ice machines for less maintenance.

Dometic Spot Zero uses a multi-step reverse-osmosis process: Filters remove sediment, granulated activated carbon removes chlorine, chloramines and heavy metals, and a semi-permeable membrane allows the passage of water but not ions or larger molecules. In addition to eliminating 95-99% of TDS, Dometic Spot Zero also removes viruses, cysts, bacteria, and radioactive contaminants from any dock water anywhere in the world.

Spot Zero Double Pass models are available that purify water from both a dockside freshwater source and the output from your onboard seawater reverse osmosis system. Contact Dometic Marine for more details.



Removes 95-99% of total dissolved solids from any dock water supply.



Dometic Spot Zero installed on-board.



Dometic Spot Zero installed on-board.

Key Benefits

- Eliminates water spots
- Removes 95-99% of total dissolved solids
- Purifies dockside water
- Removes viruses, cysts, and bacteria
- No need to chamois-dry surfaces
- Stop wasting time drying by hand
- Extends wax and paint life
- Provides pure water for bathing and drinking
- Compact design
- Very low power consumption
- Very low noise and vibration
- Available in capacities of 125 GPH (473 LPH) and 85 GPH (322 LPH)

Product Testimonial

"Less soap is used in the washing machines because the water is so soft. Same in the showers — they don't have to clean so much. The ice in the ice makers is fantastic and the water tastes amazing. Outside with the guys rinsing down, Spot Zero is great. It saves the paint because they don't have to buff off any hard water. On the windows the water beads off. It's definitely a must. It saves so many headaches. I've found it's fantastic."

— Mike Baird, Chief Engineer, 164 ft. Christensen


Dometic
SPOT ZERO

Specifications for Dometic Spot Zero System

Model	Control Panel	Pre-Filter Assembly	SZ2000 Membrane Assembly	SZ3000 Membrane Assembly
Capacity Per Hour (gal/l)	N/A	N/A	85/321.8	125/473.2
Capacity Per 24 Hours (gal/l)	N/A	N/A	2,000/7,571	3,000/11,356
Amperage	10A @ 115V 5A @ 230V	N/A	N/A	N/A
Net Weight (lbs/kg)	50/22.7	42/19.0	20/9.07	40/18.14
Shipping Weight (lbs/kg)	SZ2000: 205/93.0 SZ3000: 237/107.5			
Shipping Dimensions (H X W X D)	30 X 41.5 X 48.5 in. (762 X 1,055 X 1,232 mm)			

¹ Weight shown is for one membrane vessel assembly used in the SZ2000 model. Please double weight to 42 lbs. (19.1 kg) for SZ3000 model which uses two membrane vessel assemblies.

Dimensions

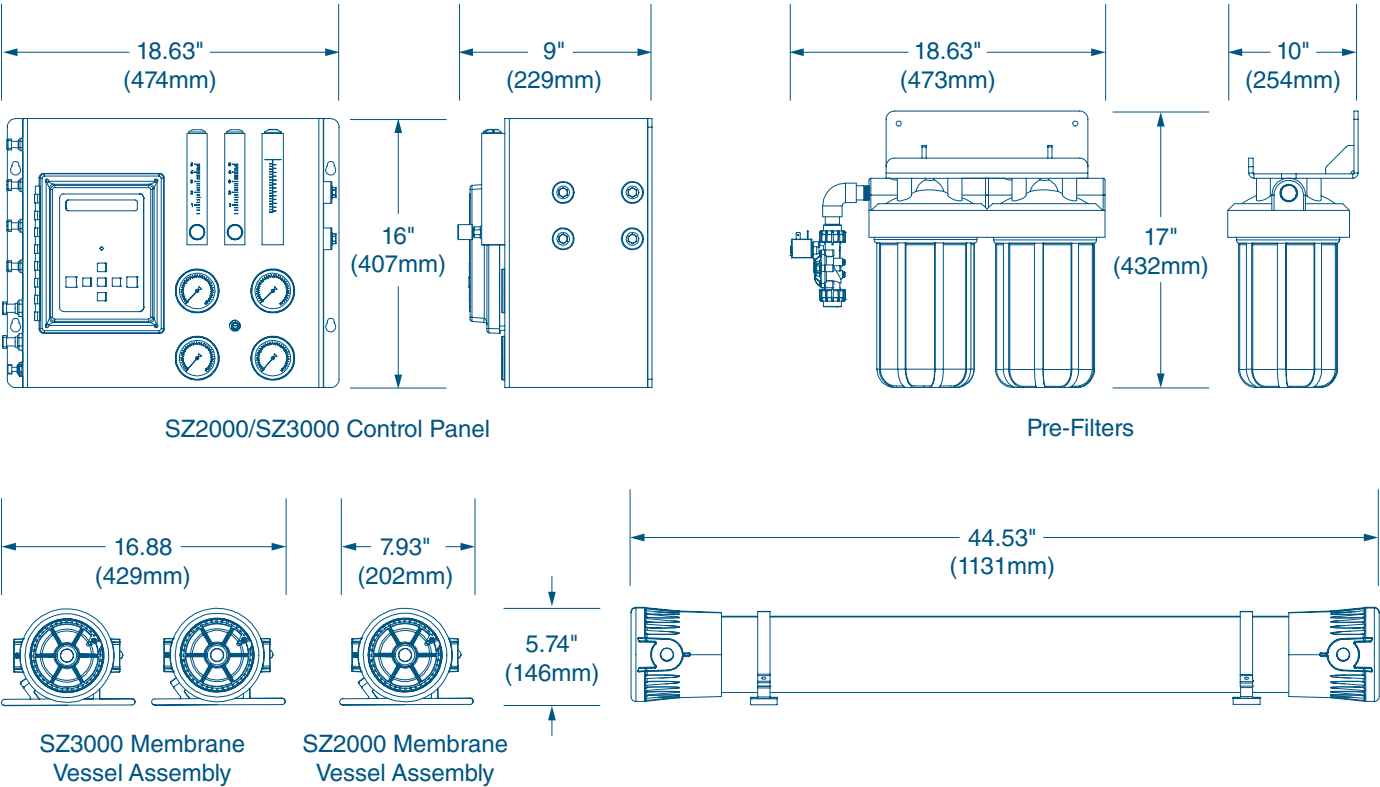

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



NEW

Dometic Spot Zero Double Pass System

Purifies Dock Water & Water Produced by Watermakers



Spot Zero control panel and pre-filters assembly deck-mount configuration shown

Get the benefit of Spot Zero water from both of your freshwater sources—your onboard watermaker system and the potable water provided dockside. The Spot Zero Double Pass system processes feed water from either source automatically.

The Spot Zero rejects about 98% of total dissolved solids (TDS) in any potable water supply, creating soft, pure water that lets water-sprayed surfaces dry clean without leaving spots that have to be wiped away. Air-drying after a Spot Zero rinse helps preserve the boat's paint and wax finishes since "wiping away" dissolved solids can grind them into finished surfaces, creating minute scratches.

Dometic Spot Zero water can also be used for bathing, cooking, drinking, and making crystal-clear ice onboard. Enjoy spot-free glassware, dishes, and shower surfaces, and eliminate mineral build-up in ice machines for less maintenance. It removes viruses, cysts, bacteria and radioactive contaminants.

The Dometic Spot Zero Double Pass system connects to any brand of watermaker, including the extensive range of Dometic Sea Xchange watermakers.

The Spot Zero Double Pass freshwater reverse-osmosis system has a compact, modular design and is fully equipped and customizable. It is available in two capacities to produce either 2,000 GPD (7,571 LPD) or 3,000 GPD (11,356 LPD).

Key Benefits


- Purifies water from dockside source
- Purifies water from onboard desalination system
- Eliminates water spots
- Removes 95-99% of total dissolved solids
- Removes viruses, cysts, and bacteria
- No need to chamois-dry surfaces
- Stop wasting time drying by hand
- Extends wax and paint life
- Provides pure water for bathing and drinking
- Compact design
- Very low power consumption
- Very low noise and vibration
- Wall- or deck-mount configurations
- Available in capacities of 125 GPH (473 LPH) and 85 GPH (322 LPH)

 **Dometic**
SPOT ZERO

Specifications for Dometic Spot Zero Double-Pass System

Model	Wall-Mount Assembly	Deck-Mount Assembly	SZ2000 Membrane Assembly	SZ3000 Membrane Assembly
Capacity Per Hour (gal/l)	N/A	N/A	85/321.8	125/473.2
Capacity Per 24 Hours (gal/l)	N/A	N/A	2,000/7,571	3,000/11,356
Amperage	10A @ 115V 5A @ 230V	10A @ 115V 5A @ 230V	N/A	N/A
Net Weight (lbs/kg)	130/60	130/60	20/9.07	40/18.14
Shipping Weight (lbs/kg)	SZ2000: 175/79.4 SZ3000: 185/83.9			
Shipping Dimensions (H X W X D)	30 X 41.5 X 48.5 in. (762 X 1,055 X 1,232 mm)			

Dimensions

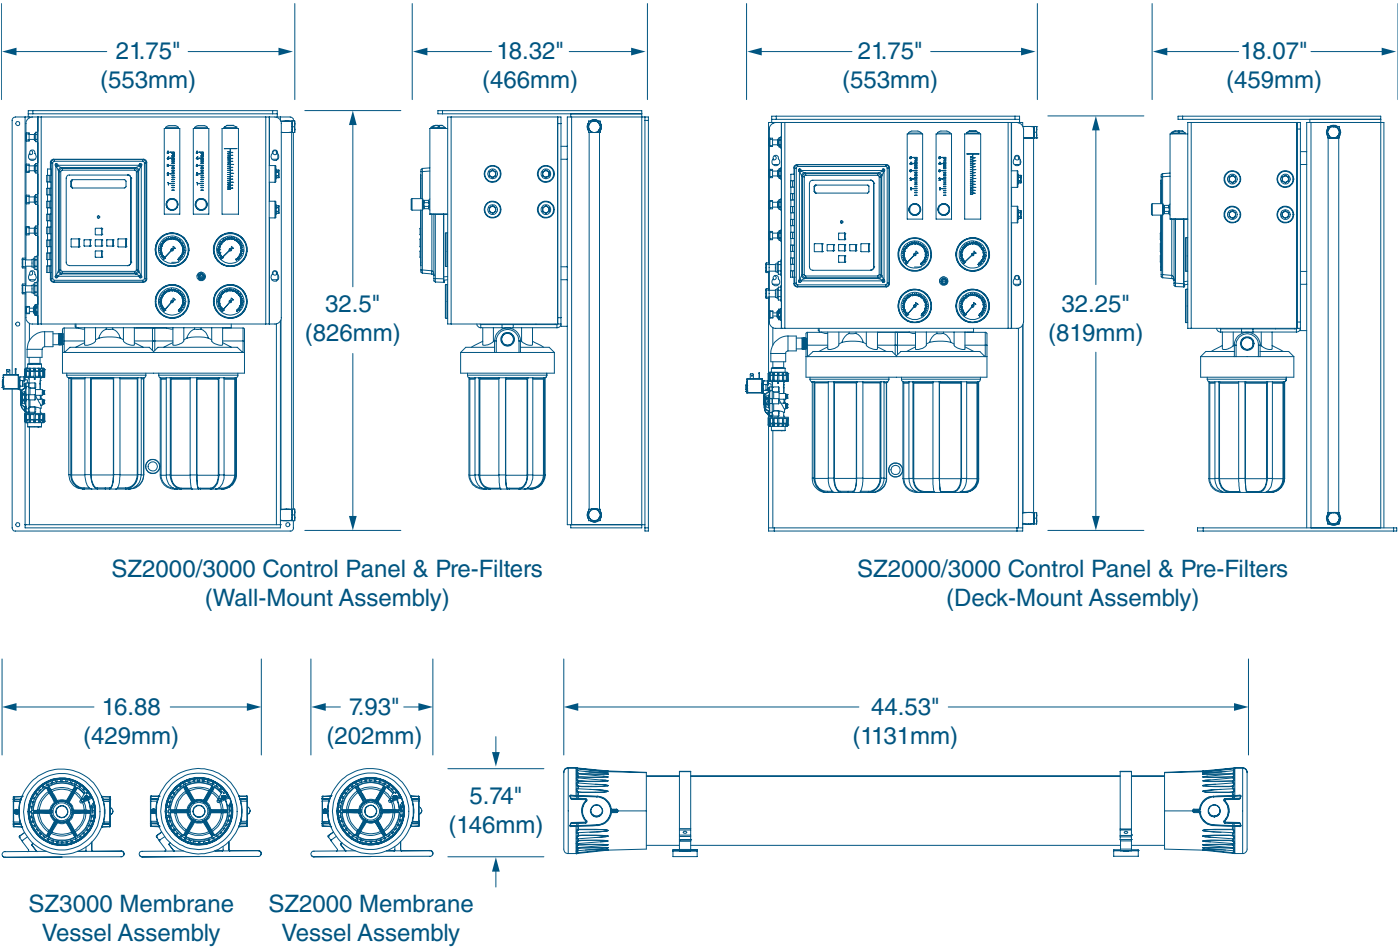

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3387 Rev. 20150410 Specifications and availability subject to change without notice.

Dealer



NEW

Dometic Sea Xchange XTC Watermakers

The Only Automatic Watermaker With Mechanical Redundancy



Dometic Sea Xchange XTC1800 model shown

The Dometic Sea Xchange XTC watermaker lets you enjoy the freedom of fully automatic operation with the backup reliability of mechanical override for full redundancy and peace of mind.

Operation is easy and dependable. The built-in 7 in. (178 mm) color touchscreen display with a marine-ready enclosure meets the National Electrical Manufacturers Association (NEMA) 4X rating, which ensures resistance to corrosion, water, windblown dust, and external ice formation. Its color graphics are easy to read and understand. An optional remote LCD touchscreen is also available.

Providing true one-touch operation, unique programmable logic control (PLC) software monitors and regulates all system functions without operator intervention. You can relax onboard knowing your water production is optimized and ongoing.

Another unique, innovative advantage—the XTC Series provides remote access via smartphone, tablet, or computer from anywhere in the world using Dometic's embedded Smart Touch Integrated Intelligence Control (STIIC) software. No other watermaker system provides this two-way interactive intelligence. It lets you monitor your system and troubleshoot problems via the Internet and a free app. You can check your system's status, change settings, turn it on, turn it off, or diagnose a problem remotely.

Built for marine reliability, the XTC Series has a 316 stainless-steel high-pressure pump and boost pump motor shaft. An optional 316 stainless-steel commercial pre-filter housing is available. The totally enclosed, fan cooled (TEFC) motor has thermal protection.

Additional features include automatic freshwater flush and seawater membranes that are commercially available. The system is fully upgradable from 600 GPD (2,271 LPD) to 2,200 GPD (8,328 LPD).



Integrated 7 in. (178 mm) color touchscreen display (NEMA 4X).



Mechanical override in case of computerized automation failure.



Optional 316SS commercial pre-filter

Key Benefits

- The only fully automatic watermaker with mechanical redundancy
- The only watermaker with remote monitoring via Internet and smartphone
- Free app for remote monitoring with STIIC software
- Fully automatic operation
- Mechanical override
- Fully redundant system
- 7 in. (178 mm) color touchscreen display (NEMA 4X)
- Unique PLC software monitors and regulates all system functions
- Fully automatic high-pressure regulating valve with integrated mechanical backup
- 2-in-1 modular or compact frame design
- 316 stainless-steel high-pressure pump
- 316 stainless-steel booster pump and high-pressure pump motor shafts
- Commercially available seawater membranes
- Fully upgradable from 600 GPD (2,271 LPD) to 2,200 GPD (8,328 LPD)
- TEFC motor with thermal motor protection
- Modbus networking available standard

Special Options

- Remote 7 in. (178 mm) color touchscreen display (NEMA 4X)
- 316 stainless-steel commercial pre-filter housing
- CAN Bus networking available when purchased with an adapter




Specifications for Dometic Sea Xchange XTC Watermakers

Model	XTC600	XTC1200	XTC1800	XTC2200	Booster Pump	HP Pump
Capacity Per Hour (gal/l)	25/94.6	50/189.3	75/283.9	92/348.3	N/A	N/A
Capacity Per 24 Hours (gal/l)	600/2,271	1,200/4,542	1,800/6,814	2,200/8,328	N/A	N/A
Amperage	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	3.6A @ 230V/60Hz 4.4A @ 220V/50Hz	10.4A @ 230V/60Hz 11.0A @ 220V/50Hz
Membrane Quantity	1	2	3	4	N/A	N/A
Net Weight (lbs/kg)	145/65.8	155/70.3	165/74.8	175/79.4	Included In Net Weight	Included In Net Weight
Shipping Weight (lbs/kg)	210/95.3	220/99.8	230/104.3	240/108.9	Included In Shipping Weight	Included In Shipping Weight
Shipping Dimensions (H X W X D)	31 X 41.5 X 48.5 in. (762 X 1,055 X 1,232 mm)					

¹ With optional commercial pre-filter, height of all XTC framed units is 21 in. (534 mm).

Dimensions

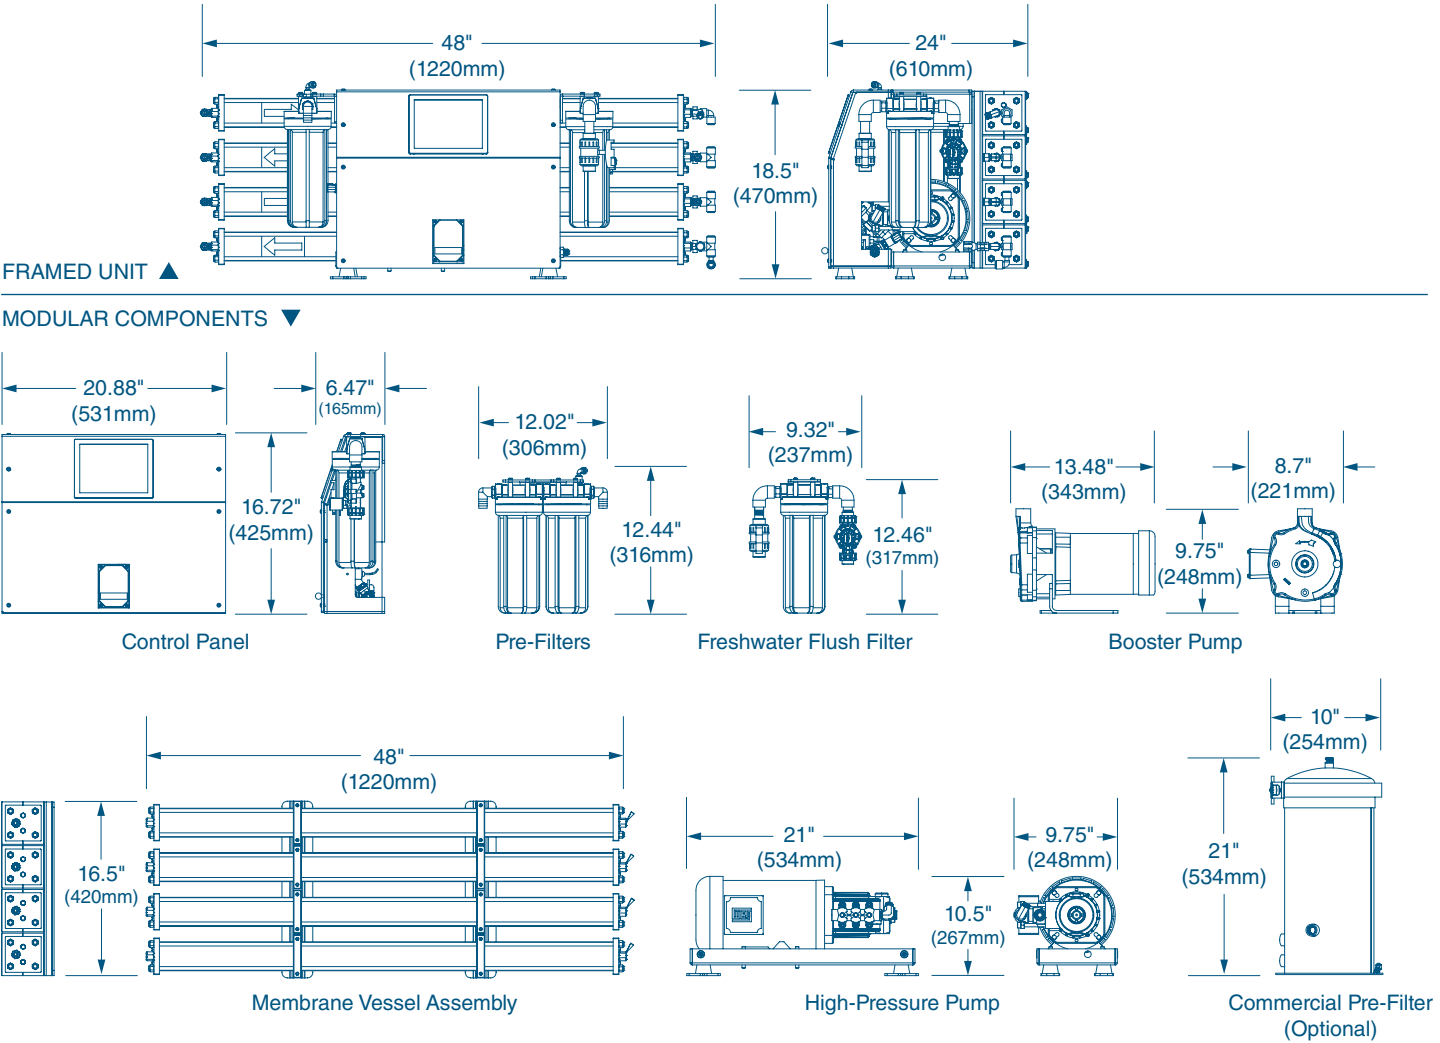

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



NEW

Dometic Sea Xchange SX Watermakers

Continuous High Performance Meets High Output Demands



Dometic Sea Xchange SX600 reverse-osmosis watermaker system

For boats that require larger volumes of reliable water production, the Dometic Sea Xchange SX watermaker series provides up to 2,200 GPD (8,328 LPD) using reverse-osmosis technology to turn seawater into potable water.

The powerful but compactly designed Sea Xchange SX fits anywhere. The 2-in-1 modular or compact frame lets you make the best use of any available installation space.

Built for marine reliability, durability and rust resistance, the SX Series has a 316 stainless-steel high-pressure pump, 316 stainless-steel flow and pressure components, and 316 stainless-steel boost pump motor shaft. The high-pressure pump and the boost pump are the most durable and efficient pumps available. The totally enclosed, fan cooled (TEFC) motor has thermal protection.

Other features include an automatic freshwater flush, easy-to-use backlit computer controller display and an optional remote control. The high-rejection seawater membranes are commercially available and the system is fully upgradable from 600 GPD (2,271 LPD) to 2,200 GPD (8,328 LPD). Sea Xchange SX watermakers are made in the USA.

Key Benefits

- 2-in-1 modular or compact frame design
- Durable and reliable
- 316 stainless-steel flow and pressure components
- 316 stainless-steel booster pump and high-pressure pump motor shafts
- 316 stainless-steel high-pressure pump
- TEFC motor with thermal motor protection
- Computer controller with backlit display
- Optional remote control
- Tank switch input allows for automatic shut off
- Automatic freshwater flush
- High-rejection seawater membranes
- Commercially available seawater membranes
- Fully upgradable from 600 GPD (2,271 LPD) to 2,200 GPD (8,328 LPD)

Special Options

- Remote control
- 316 stainless-steel commercial pre-filter housing




Modular SX 600 GPD shown



Specifications for Dometic Sea Xchange SX Watermakers

Model	SX600	SX1200	SX1800	SX2200	Booster Pump	HP Pump
Capacity Per Hour (gal/l)	25/94.6	50/189.3	75/283.9	92/348.3	N/A	N/A
Capacity Per 24 Hours (gal/l)	600/2,271	1,200/4,542	1,800/6,814	2,200/8,328	N/A	N/A
Amperage	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	3.6A @ 230V/60Hz 4.4A @ 220V/50Hz	10.4A @ 230V/60Hz 11.0A @ 220V/50Hz
Membrane Quantity	1	2	3	4	N/A	N/A
Net Weight (lbs/kg)	145/66	155/71	165/75	175/80	Included In Net Weight	Included In Net Weight
Shipping Weight (lbs/kg)	225/102.0	245/111.1	265/120.2	285/129.3	Included In Shipping Weight	Included In Shipping Weight
Shipping Dimensions (H X W X D)	31 X 41.5 X 48.5 in. (762 X 1,055 X 1,232 mm)					

Dimensions

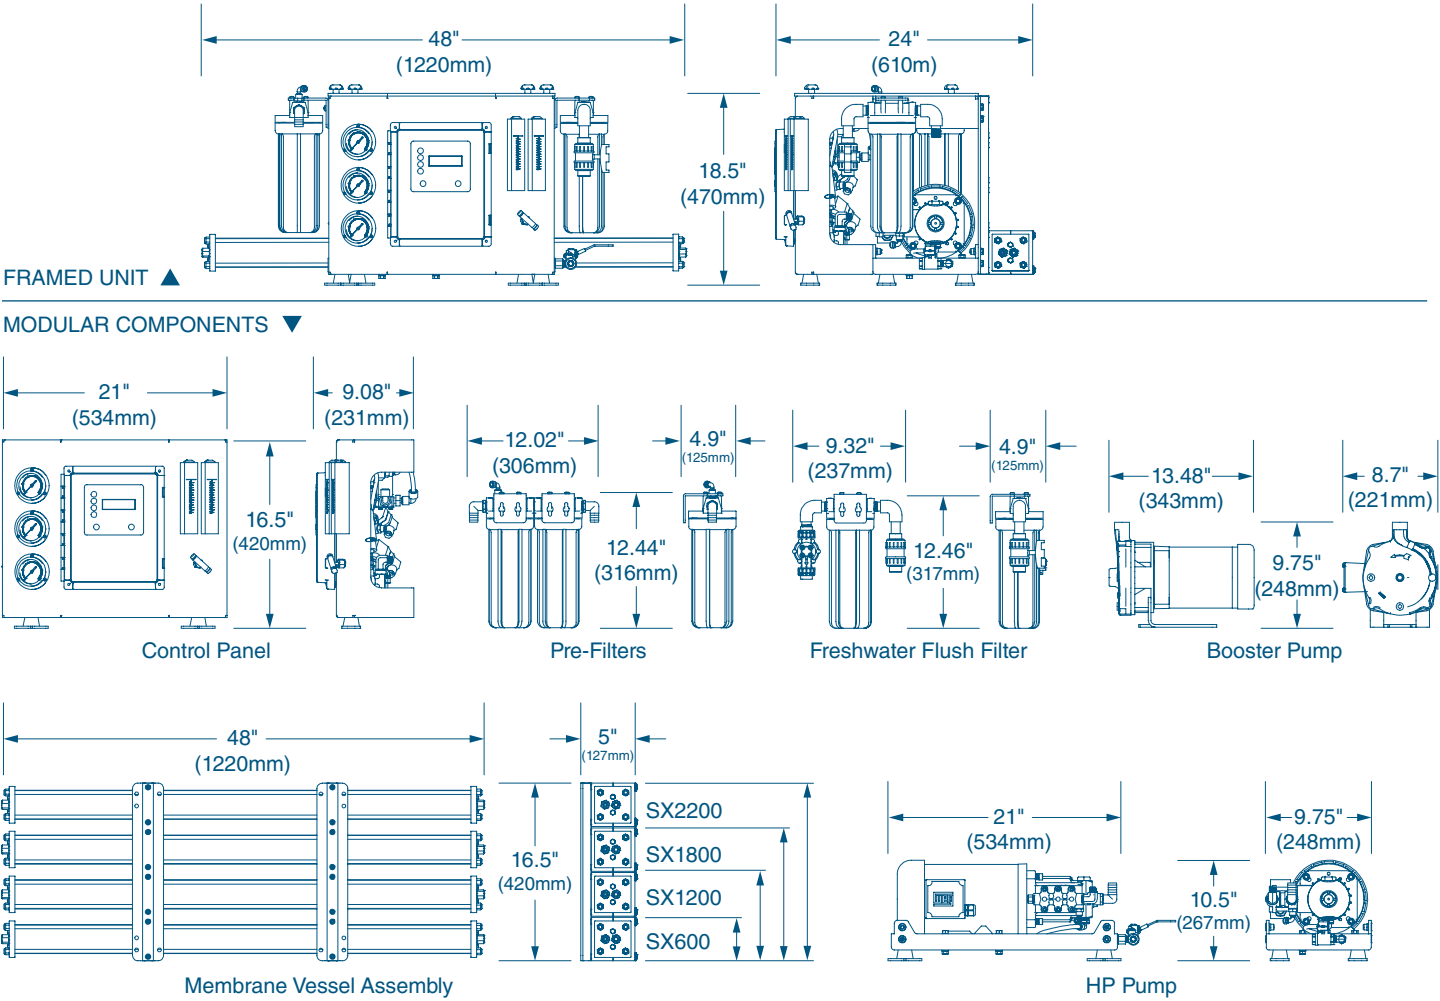

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3294 Rev. 20150306 Specifications and availability subject to change without notice.

Dealer



NEW

Dometic Sea Xchange SE Watermakers

The Most Reliable & Compact System for Recreational Boaters



Dometic Sea Xchange SE600Z model shown

Travel for extended periods without having to dock for freshwater refills. Make your own water anywhere.

The Dometic Sea Xchange SE watermaker provides recreational boaters with the luxury of creating your own water while cruising on the ocean. The extremely compact SE Series produces 350 GPD (1,325 LPD) to 1,200 GPD (4,542 LPD) using reverse-osmosis technology to turn seawater into potable water.

The Dometic Sea Xchange SE fits anywhere. The 2-in-1 modular or compact frame lets you make the best use of any available installation space.

Built for marine reliability, durability and rust resistance, the SE Series has a 316 stainless-steel high-pressure pump, 316 stainless-steel high-pressure regulating valve, and 316 stainless-steel boost pump motor shaft. The high-pressure pump and the boost pump are the most durable and efficient pumps available. The totally enclosed, fan cooled (TEFC) motor has thermal protection.

Other features include a backlit computer controller display and seawater membranes that are commercially available. Options include freshwater flush filter assembly and a remote control.

Key Benefits

- 2-in-1 modular or compact frame design
- Durable and reliable
- 316 stainless-steel high-pressure regulating valve
- 316 stainless-steel high-pressure pump
- 316 stainless-steel booster pump and high-pressure pump motor shafts
- TEFC motor with thermal motor protection
- Computer controller with backlit display
- Tank switch input allows for automatic shut off
- Commercially available seawater membranes
- Fully upgradable from 350 GPD (1,325 LPD) to 1,200 GPD (4,542 LPD)

Special Options

- Remote control
- Freshwater flush filter assembly



Integrated pressure gauges, flow meter, and control panel with backlit display.



Vibration-isolation mounts reduce noise and vibration.




316 SS high-pressure pump components are durable in the marine environment.

Dometic
SEA XCHANGE

Specifications for Dometic Sea Xchange SE Watermakers

Model	SSE350	SE600-1	SE600-2	SE800	SE1200	Booster Pump	HP Pump
Capacity Per Hour (gal/l)	14.6/55	25/95	25/95	33/125	50/189.3	N/A	N/A
Capacity Per 24 Hours (gal/l)	350/1,325	600/2,271	600/2,271	800/3,028	1,200/4,542	N/A	N/A
Amperage	10.6A @ 230V/60Hz 12.6A @ 220V/50Hz	10.6A @ 230V/60Hz 12.6A @ 220V/50Hz	10.6A @ 230V/60Hz 12.6A @ 220V/50Hz	10.6A @ 230V/60Hz 12.6A @ 220V/50Hz	10.6A @ 230V/60Hz 12.6A @ 220V/50Hz	3.6A @ 230V/60Hz 4.4A @ 220V/50Hz	7.0A @ 230V/60Hz 8.2A @ 220V/50Hz
Membrane Quantity	1 Low-Capacity Membrane	1 High-Capacity Membrane	2 Low-Capacity Membranes	2 High-Capacity Membranes	3 High-Capacity Membranes	N/A	N/A
Net Weight (lbs/kg)	120/54.4	140/63.5	130/59.0	150/68.0	160/72.6	Included In Net Weight	Included In Net Weight
Shipping Weight (lbs/kg)	185/83.9	205/93.0	195/88.5	215/97.5	225/102.1	Included In Shipping Weight	Included In Shipping Weight
Shipping Dimensions (H X W X D)	31 X 41.5 X 48.5 in. (762 X 1,055 X 1,232 mm)						

Dimensions

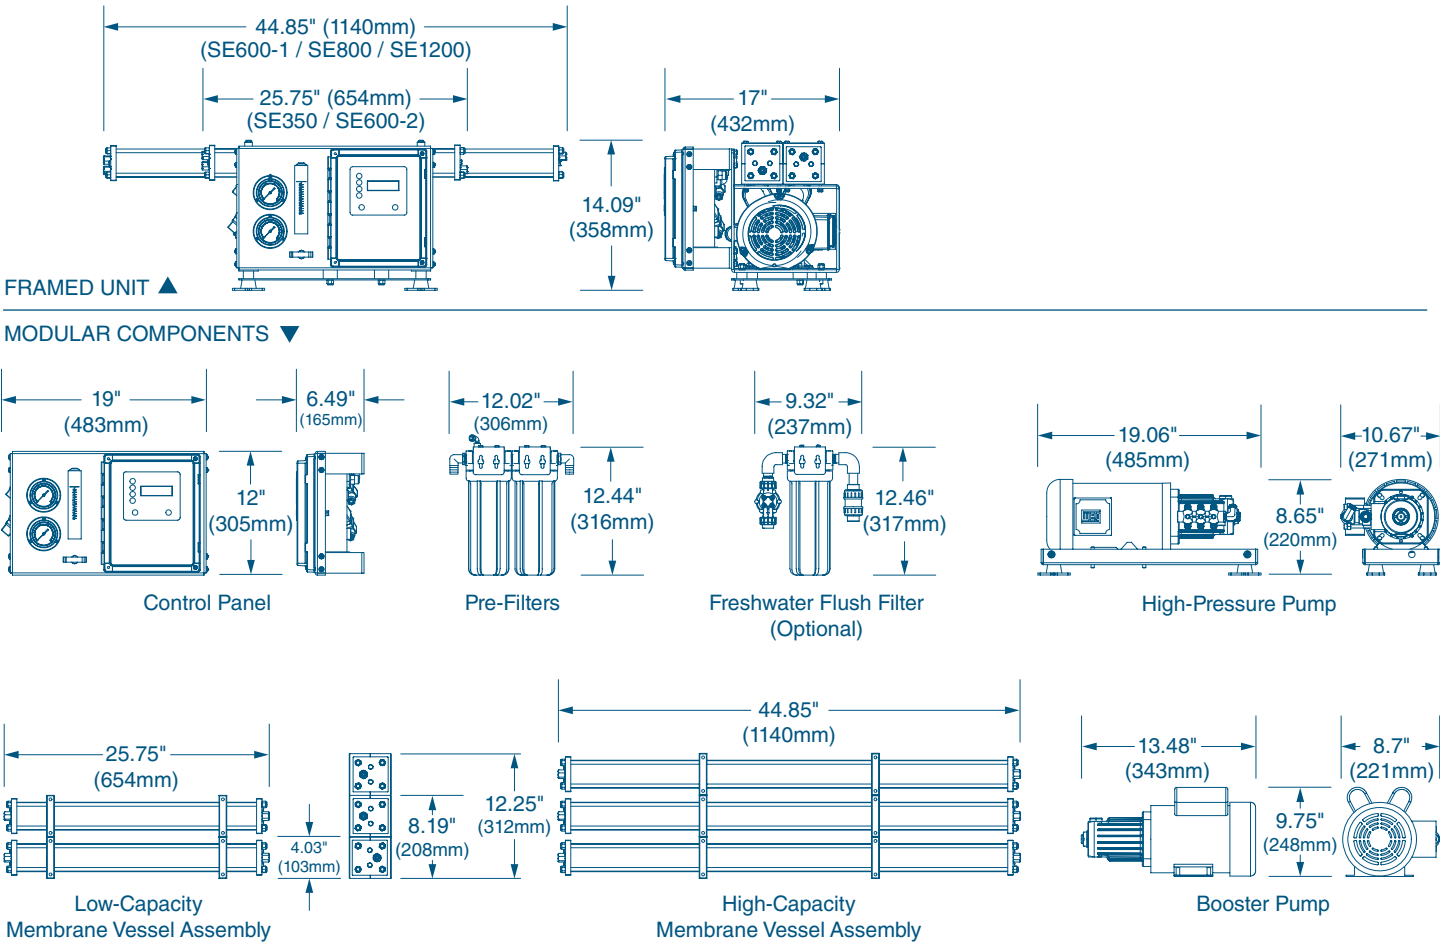

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-3385 Rev. 20150306 Specifications and availability subject to change without notice.

Dealer



Ship-Wide Ventilation Systems

Fans, Blowers, Mist Eliminators, Dampers & Controls



Fan controls, mist eliminators, smoke and fire dampers, fans, and blowers for ship-wide ventilation systems

Dometic offers ship-wide ventilation products for the commercial and pleasure boat markets, including axial fans, centrifugal blowers, smoke and fire dampers, mist-eliminating grilles, and electronic fan controls.

Commercial-grade axial fans and centrifugal blowers provide cooling and/or combustion air for marine machinery spaces. Materials are chosen with corrosion resistance and weight in mind. Blades are constructed of high-strength PPG glass-reinforced polyamide, with standard powder coating of the fan housing. Fan motors are high efficiency, direct drive, and reversible. All hardware is either marine-grade aluminum or 316 stainless steel.

Smoke and fire dampers close off the engine space in the event of a fire. The lack of fresh air in conjunction with the release of fire retardant can snuff out a fire and save a boat from possibly burning to the waterline. Dampers come in both marine-grade aluminum and stainless steel.

Mist-eliminating grilles stop corrosive salt mist and water from entering the engine room. Each mist eliminator is custom designed for maximum air flow and minimum restriction for a given machinery package, keeping air flow and dimensional restrictions in mind. There are four mist eliminator drainage options: bottom draining, face draining, horizontal and sump draining.

Pressure- and temperature-monitoring fan controls are available for three-phase fans and blowers, as well as 24 VDC fans. They can be manual variable speed, temperature controlled, pressure controlled, or pressure and temperature controlled. DC controls are temperature based. All controls come standard with fire system shutdowns. Three-phase systems can also have fire damper control. Interface with central monitoring systems is optional.



3-phase axial fans available in 12-48 in. (30.5-61 cm) diameter range, with high-strength PPG glass-reinforced polyamide blades.



Mist eliminators are custom designed to maximize air flow, with four drainage options: Bottom, face, horizontal, or sump.



Smoke and fire dampers are available in marine-grade aluminum or stainless steel with manual, pneumatic (shown), or electronic operation.

Key Benefits

- Custom solutions for protecting marine machinery spaces
- Pressure- and temperature-monitoring fan controls with fire system shutdown as standard
- Fan controls available for 3-phase and 24V DC fans and blowers
- Optional central monitoring interface available for fan controls
- Smoke and fire dampers are available in marine-grade aluminum or stainless steel
- Dampers can be operated manually, pneumatically, or electronically
- Mist-eliminating grilles (demisters) are custom designed for maximum air flow and minimum restriction
- Demisters have four drainage options: Bottom, face, horizontal, or sump
- Commercial-grade fans and blowers built for optimal corrosion resistance and weight
- Blades are constructed of high-strength PPG glass-reinforced polyamide
- AC fans have powder coated housing
- Fan motors are high efficiency, direct drive, and reversible
- Marine-grade aluminum or 316 stainless-steel hardware


Types of Engine Ventilation Systems

Natural Draft – No Fans

A Natural-Draft ventilation system is the most basic. The main engines pull air through the mist eliminators mounted in plenum boxes just inside the hull openings. As the combustion air is exhausted, it removes heat from the space and no fans are used. A Natural-Draft system is typically used on small boats with small engine spaces.

Advantages: Simple, inexpensive, lightweight, no electrical load

Disadvantages: High temperatures at low RPM, no control of temperature, large openings and mist eliminators are needed as engine size increases to provide an acceptable pressure drop for proper engine operation

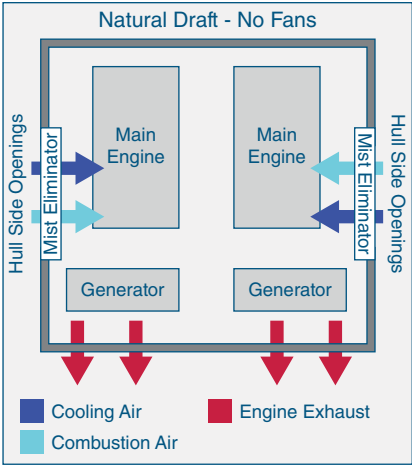


Natural Draft – Cross-Flow Cooling Fans

Commonly found on sport-fish boats from 30-80 ft. (9-24 m), a cross-flow fan arrangement is used to control the temperature of the space, and the engines pull the necessary combustion air through the mist eliminators. This system typically uses two or four DC fans or small single-phase AC fans. Four-fan systems typically use the forward fans as intakes and aft fans as exhaust which helps maintain uniform temperatures at the engine intakes. On larger vessels the fans may be 3-phase variable speed with a control that is capable of automatic temperature management.

Advantages: Simple, cost effective, lightweight, temperature is controlled during trolling and low RPM

Disadvantages: Uncontrolled fans can be noisy, with high DC current draw in some cases

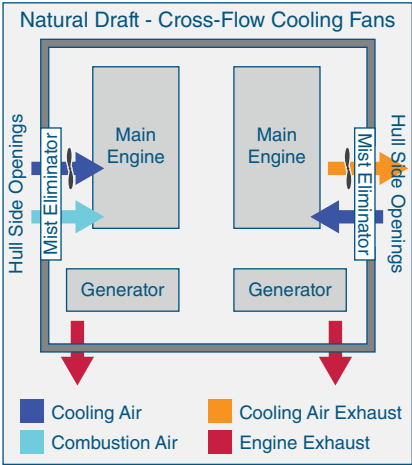



Pressure and Temperature Controlled

At a certain point a vessel becomes too large for small fans to be effective, and the intake and exhaust openings required for a natural-draft intake start to cause design issues because of open area needed for proper function. When this happens it's time to step up to 3-phase AC fans with variable-speed drives and a fan control.

By using intake and exhaust fans capable of supplying the required combustion and exhaust air, the static pressure created by the mist eliminators and grilles can be overcome. In addition, smaller openings relative to engine size and natural draft configuration can be used. However, an advanced Dometic pressure- and temperature-monitoring fan control must be employed to maintain optimal air pressure in the engine space.

Advantages: Precise control of pressure and temperature, reduced opening and moisture eliminators size, lightweight, automatic operation both underway and dockside

Disadvantages: Fan sizing becomes critical, significant cost, complexity, large fans present packaging issues, large electrical loads

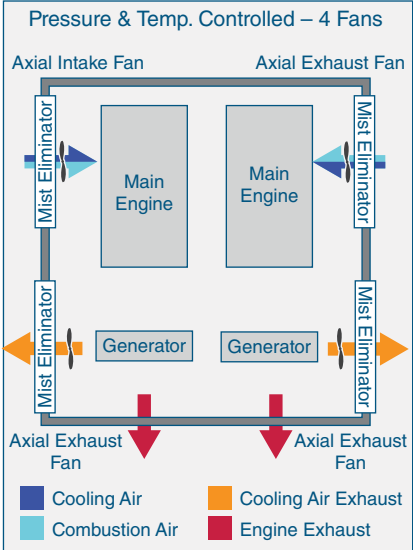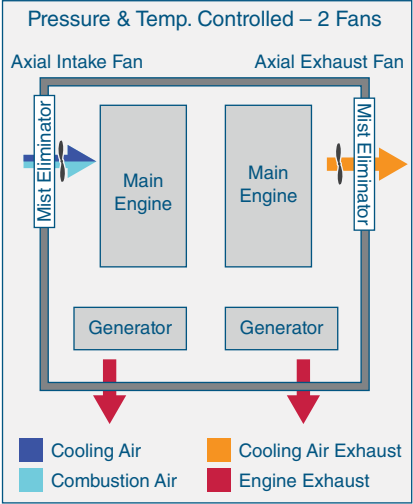

DOMETIC MARINE DIVISION
2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer



Certified Worldwide Sales & Service Network



DOMETIC MARINE DIVISION
2000 N. Andrews Ave. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.



Dealer: