

OutboardMaster

Air Cooled


Reduction ratio $i = 2$

Propeller rpm = motor rpm/ i

Including:

- Motor with mounting brackets
- Vector control inverter IP65
- NMEA2000 compatible
- Anti ventilation / cavitation plate (incl. anode)
- Main switch and main fuse
- DC-DC converter 12 Vdc
- Quick install / easy connect / plug and play
- Leg by Yanmar

(Propeller not included)

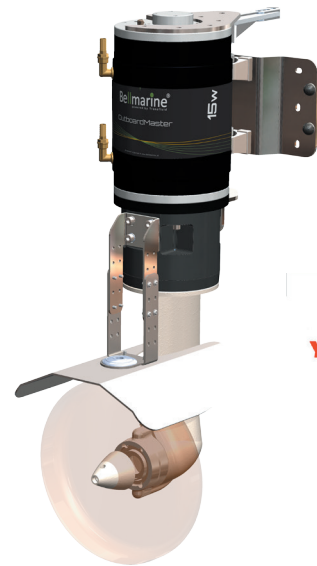

Light & Medium Duty

PRODUCT CODE	DESCRIPTION	MOTOR SIZE	NOMINAL kW	INTERMITTENT kW	BATTERY Vdc	MOTOR rpm
BV101955A	OutboardMaster 2A	180-4	1.5	2	48	1500
BV101500A	OutboardMaster 5A	180-8	4	5	48	1500
BV101966A	OutboardMaster 7A	180-12	5	7	48	1500
BV101977A	OutboardMaster 8A	180-12	6	8	96	1500
BV101988A	OutboardMaster 15A	220-20	10	15	96	1500
BV101999A	OutboardMaster 20A	220-20	15	20	96	3000

Liquid Cooled

Reduction ratio $i = 2$

Propeller rpm = motor rpm/ i

Including:

- As above
- Inlet and outlet liquid connectors

Medium & Heavy Duty

PRODUCT CODE	DESCRIPTION	MOTOR SIZE	NOMINAL kW	INTERMITTENT kW	BATTERY Vdc	MOTOR rpm
BV101955W	OutboardMaster 3W	180-4	2.5	3	48	1500
BV101500W	OutboardMaster 7W	180-8	5	7	48	1500
BV101966W	OutboardMaster 10W	180-12	8	10	48	1500
BV101977W	OutboardMaster 15W	220-20	10	15	48	1500
BV101988W	OutboardMaster 20W	220-20	15	20	96	3000



- Complete the scope of supply by adding control throttle, display, cooling kit, coupling, shaft with propeller